
KING DICK Tools are available from:
ABINGDON KING DICK
UNIT 11, ROMAN WAY, COLESHILL
INDUSTRIAL ESTATE, BIRMINGHAM
B46 1HG, ENGLAND
TEL:+44(0)1675467776
Email: info@kingdicktool.com
www.kingdicktool.com
KING DICK TOOLS
Equipping You For The Millennium

KING DICK TOOLS

# Welcome to the King Dick *PDF* Catalog

Our aim is to make it as quick and easy to find your way around. The catalogue is saved in what is called a PDF format. This is readable using an application called Adobe Acrobat. Once Acrobat is loaded, navigation is simple.

The top line has a series of self explanatory pull-down menus. The second line contains a series of icons which help you find your way around the document:

 Enables another Acrobat file to be opened.

 You can print pages using the printer icon.

 You can choose whether to show the navigation panel

 The hand icon enables you to select from the navigation panel and to move the pages

 The magnifying glass enables you to increase the size of the page being viewed.

 The "T" icon anables you select text for copying...

---

The "video control triangles" enable the following actions to take place:

 return to first page  next page

 back one page  go to last page

---

 Back to the last page you viewed  Forward to the last page you viewed

---

The page icons are

 full size  fit in window  fit width

---

 The binocular icon allows you to search through the document for any work in text...if you click on it you will be allowed to type in a key word and the document will be searched for the first occurrence. Once the first occurrence has been found you can go back and find the next one by clicking on "find again"

**Finally** the navigation panel to the left has a link to every section. If you click on "+" symbol next to the section heading it will show all the pages in that section. To then close the section just click on the "-" symbol next to the section heading.

CLICK HERE TO VIEW THE CONTENTS PAGE

ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com



# KING DICK TOOLS


Founded in 1856, **ABINGDON KING DICK** is an established manufacturer of quality engineering tools. Originally Abingdon Engineering, the Company made a variety of goods, such as gear boxes, chains, and motorcycles, for several years before concentrating solely on producing quality, professional user tools from the turn of the twentieth century onwards.



At that time the **KING DICK** name and logo was adopted. It was that of the Company Owner's show winning bulldog, and was seen as being symbolic of Brirish tenacity and strength of character:-

the
**KING DICK**
brand was born.

Now with a world wide reputation for quality and performance, **KING DICK** tools are chosen by today's discerning professionals, knowing that their rigorous demands for reliability will be achieved.

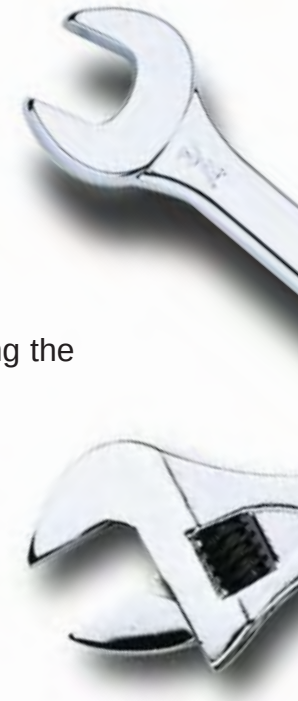

At each process, tight controls are in place to verify that the demanded tolerances have been realised. Only when proven, will the tool be released to the next operation. This means that each and every batch of **KING DICK** products have been through numerous inspection proceedures before reaching the final uncompromising quality inspection.

Only when all checks, tests, measures, and requirements have been successfully achieved, are the **KING DICK** tools accepted as suitable for release.

Tests are conducted at every process - boring, grinding, broaching, polishing, marking, hardening, and plating, and each and every batch must pass each and every test. This challenging procedure confirms that the finished tool is made to the ultimate **KING DICK** requirement, and continues our tradition of extreme quality for exceptional performance and satisfaction.


Tools of such calibre provide the professional tradesman with total confidence in their ability to perform, and to fulfil their operations and tasks in a safe, secure and efficient manner.

The ongoing **KING DICK** development programme ensures that not only is extensive research carried out in-house but real-world situations are critically analysed to define the optimum requirements.

All **KING DICK** tools are of high quality, and covered by our full replacement guarantee.

Time limits only apply to wearing parts (such as ratchet internals - 1 year, and pliers - 5 years).

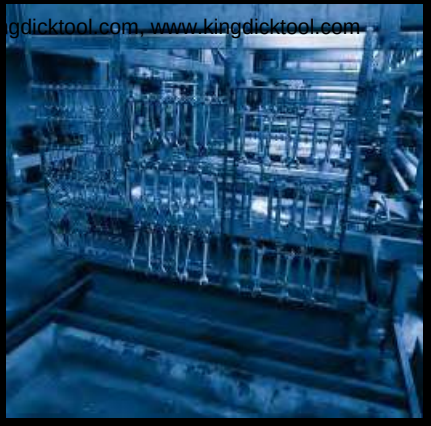

## KING DICK TOOLS

are manufactured to exacting quality standards.
The raw materials are all carefully selected, meeting our precise specifications, and every element of the manufacturing process is closely monitored to ensure that the stringent **KING DICK** quality standards are achieved.



KING DICK TOOLS

Motor Racing is one such area where **KING DICK** is intricately involved, not only with **KING DICK's** Eurocar Team, but also supporting a few carefully selected other teams competing on both two and four wheels.

For the past few years the **KING DICK** Eurocar team has been racing a V6 powered Mondeo in the closely run series, but now we've moved up a gear to compete in the *phenomenol* 500bhp V8 class.



Another notable race team is the Castrol-Honda British Supersport Motorcycle squad, a high performing team that relies on the high performance that our quality tools provide.

So, **KING DICK** tools, not only relied upon in the workplace, but in motorsports' urgent situations of prestigious importance where *total* performance is always an essential demand.

**Driver** Mark Loveland
**in the '98 Eurocar series.**


ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# WRENCHES



1

# SOCKETRY



2

# SCREWDRIVERS



3

# PLIERS



4

# TORQUE



5

# LIVE LINE



6

# ENGINEERS



7

# STORAGE



8

# TOOL KITS



9

ABINGDON KING DICK

# RJENJ



## WRENCHES

ABI KING DICK, unit 1, Roman Way, LONDON, email: info@kingdicktool.com, www.kingdicktool.com

1

KING DICK TOOLS

# WRENCHES

All **KING DICK** wrenches are made from forged blanks. The high-specification precision drop forging ensures a uniform steel grain structure which provides optimum strength.

The jaws are broached to size, using exacting tolerances for exceptional accuracy. The wrenches are ground and polished before being heat-treated within rigid controls for consistent and reliable strength.

The wrenches are polished again before the final process of computer controlled nickel chrome plating, for maximum resistance to corrosion and the high quality appearance of the **KING DICK** wrenches.




**KING DICK** wrenches are manufactured to exceed the torque requirement of the relevant DIN standards and offer increased safety for the user.

KING DICK

# OPEN END WRENCHES



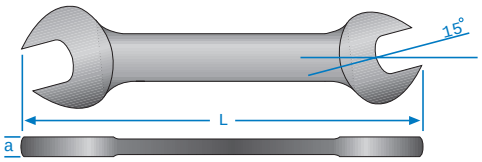


Forged from 31 CrV3 Chrome Vanadium Steel. Precisely machined, heat-treated and nickel-chrome plated.

Made to DIN 3110

METRIC

M

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| SLM 604 | 4 x 5 | 3.0 | 108 | 50 |
| SLM 6057 | 5.5 x 7 | 3.8 | 125 | 50 |
| SLM 606 | 6 x 7 | 3.7 | 125 | 50 |
| SLM 607 | 7 x 8 | 4.0 | 132 | 50 |
| SLM 608 | 8 x 10 | 4.2 | 146 | 55 |
| SLM 6089 | 8 x 9 | 3.8 | 142 | 55 |
| SLM 610 | 10 x 11 | 4.5 | 161 | 70 |
| SLM 6103 | 10 x 13 | 5.0 | 170 | 90 |
| SLM 6123 | 12 x 13 | 5.2 | 178 | 90 |
| SLM 6137 | 13 x 17 | 5.8 | 193 | 140 |
| SLM 614 | 14 x 15 | 5.5 | 187 | 130 |
| SLM 616 | 16 x 17 | 5.8 | 193 | 150 |
| SLM 6179 | 17 x 19 | 6.1 | 218 | 190 |
| SLM 618 | 18 x 19 | 6.4 | 221 | 190 |
| SLM 6192 | 19 x 22 | 6.7 | 237 | 240 |
| SLM 6194 | 19 x 24 | 7.0 | 246 | 240 |
| SLM 620 | 20 x 22 | 6.8 | 237 | 240 |
| SLM 6213 | 21 x 23 | 7.0 | 250 | 250 |
| SLM 6224 | 22 x 24 | 7.0 | 248 | 260 |
| SLM 6240 | 24 x 30 | 8.5 | 286 | 400 |
| SLM 6246 | 24 x 26 | 8.0 | 272 | 375 |
| SLM 6247 | 24 x 27 | 8.1 | 276 | 360 |
| SLM 6258 | 25 x 28 | 8.0 | 285 | 400 |
| SLM 6270 | 27 x 30 | 8.6 | 296 | 450 |
| SLM 6272 | 27 x 32 | 9.0 | 295 | 550 |
| SLM 6302 | 30 x 32 | 8.7 | 299 | 525 |
| SLM 6306 | 30 x 36 | 9.5 | 318 | 700 |
| SLM 6326 | 32 x 36 | 10.0 | 318 | 690 |
| SLM 6361 | 36 x 41 | 11.5 | 366 | 1,000 |
| SLM 6416 | 41 x 46 | 13.3 | 400 | 1,300 |
| SLM 6460 | 46 x 50 | 14.5 | 450 | 1,700 |
| SLM 6505 | 50 x 55 | 14.5 | 450 | 1,700 |
| SLM 6550 | 55 x 60 | 19.7 | 508 | 3,300 |

AF

AF

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| SLA 608 | 1/4 x 5/16 | 3.5 | 132 | 30 |
| SLA 610 | 5/16 x 3/8 | 3.5 | 142 | 50 |
| SLA 612 | 3/8 x 7/16 | 4.5 | 157 | 60 |
| SLA 614 | 7/16 x 1/2 | 5.0 | 170 | 90 |
| SLA 616 | 1/2 x 9/16 | 5.0 | 183 | 100 |
| SLA 618 | 9/16 x 5/8 | 5.2 | 187 | 110 |
| SLA 6182 | 9/16 x 11/16 | 5.7 | 195 | 130 |
| SLA 6201 | 5/8 x 11/16 | 5.3 | 198 | 150 |
| SLA 621 | 5/8 x 3/4 | 6.5 | 218 | 190 |
| SLA 6224 | 11/16 x 3/4 | 6.4 | 218 | 190 |
| SLA 622 | 11/16 x 13/16 | 6.0 | 221 | 175 |
| SLA 624 | 3/4 x 7/8 | 6.9 | 237 | 240 |
| SLA 626 | 13/16 x 7/8 | 6.7 | 237 | 250 |
| SLA 628 | 7/8 x $1^{1}/_{16}$ | 7.2 | 278 | 340 |
| SLA 630 | 15/16 x 1 | 8.3 | 273 | 370 |
| SLA 6306 | 15/16 x $1^{1}/_{8}$ | 8.0 | 274 | 375 |
| SLA 636 | $1^{1}/_{16}$ x $1^{1}/_{4}$ | 8.6 | 276 | 515 |
| SLA 6380 | $1^{1}/_{8}$ x $1^{5}/_{16}$ | 9.0 | 299 | 500 |
| SLA 640 | $1^{1}/_{4}$ x $1^{7}/_{16}$ | 10.0 | 318 | 750 |
| SLA 642 | $1^{5}/_{16}$ x $1^{1}/_{2}$ | 10.0 | 318 | 725 |
| SLA 6462 | $1^{7}/_{16}$ x $1^{5}/_{8}$ | 11.8 | 364 | 1,000 |
| SLA 652 | $1^{5}/_{8}$ x $1^{13}/_{16}$ | 13.0 | 400 | 1,300 |
| SLA 655 | $1^{11}/_{16}$ x $1^{7}/_{8}$ | 13.0 | 400 | 1,260 |
| SLA 658 | $1^{13}/_{16}$ x 2 | 14.0 | 430 | 1,700 |
| SLA 6662 | $2^{1}/_{16}$ x $2^{1}/_{4}$ | 14.0 | 430 | 1,700 |
| SLA 6706 | $2^{3}/_{16}$ x $2^{3}/_{8}$ | 20.0 | 508 | 3,300 |

WHIT.

W

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| SLW 602 | 1/8 x 3/16 | 4.6 | 157 | 60 |
| SLW 603 | 3/16 x 1/4 | 5.0 | 170 | 90 |
| SLW 604 | 1/4 x 5/16 | 5.0 | 183 | 100 |
| SLW 605 | 5/16 x 3/8 | 5.7 | 207 | 160 |
| SLW 606 | 3/8 x 7/16 | 6.3 | 235 | 225 |
| SLW 607 | 7/16 x 1/2 | 7.1 | 248 | 260 |
| SLW 608 | 1/2 x 9/16 | 8.5 | 273 | 390 |
| SLW 6089 | 1/2 x 5/8 | 8.3 | 274 | 375 |
| SLW 609 | 9/16 x 5/8 | 8.4 | 285 | 420 |
| SLW 6091 | 9/16 x 11/16 | 8.5 | 276 | 410 |
| SLW 610 | 5/8 x 11/16 | 8.7 | 296 | 490 |
| SLW 6102 | 5/8 x 3/4 | 8.6 | 296 | 540 |
| SLW 611 | 11/16 x 3/4 | 8.7 | 299 | 540 |
| SLW 612 | 3/4 x 7/8 | 10.0 | 318 | 740 |
| SLW 614 | 7/8 x 1 | 11.5 | 364 | 990 |
| SLW 616 | 1 x $1^{1}/_{8}$ | 13.5 | 406 | 1,300 |
| SLW 618 | $1^{1}/_{8}$ x $1^{1}/_{4}$ | 14.0 | 450 | 1,700 |
| SLW 620 | $1^{1}/_{4}$ x $1^{3}/_{8}$ | 14.0 | 450 | 1,700 |
| SLW 622 | $1^{3}/_{8}$ x $1^{1}/_{2}$ | 20.0 | 508 | 3,300 |

# OPEN END WRENCH SETS



METRIC

M



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKO 7M | SLM 6057 | 5.5 x 7 | 825 |
| | SLM 607 | 7 x 8 | |
| | SLM 608 | 8 x 10 | |
| | SLM 6103 | 10 x 13 | |
| | SLM 6137 | 13 x 17 | |
| | SLM 6179 | 17 x 19 | |
| | SLM 6224 | 22 x 24 | |
| TKO 8M | SLM 606 | 6 x 7 | 975 |
| | SLM 6089 | 8 x 9 | |
| | SLM 610 | 10 x 11 | |
| | SLM 6123 | 12 x 13 | |
| | SLM 614 | 14 x 15 | |
| | SLM 616 | 16 x 17 | |
| | SLM 618 | 18 x 19 | |
| | SLM 620 | 20 x 22 | |
| TKO 12M | SLM 606 | 6 x 7 | 2,600 |
| | SLM 6089 | 8 x 9 | |
| | SLM 610 | 10 x 11 | |
| | SLM 6123 | 12 x 13 | |
| | SLM 614 | 14 x 15 | |
| | SLM 616 | 16 x 17 | |
| | SLM 618 | 18 x 19 | |
| | SLM 620 | 20 x 22 | |
| | SLM 6224 | 22 x 24 | |
| | SLM 6247 | 24 x 27 | |
| | SLM 6270 | 27 x 30 | |
| | SLM 6302 | 30 x 32 | |

AF

AF



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKO 4A | SLA 614 | 7/16 x 1/2 | 650 |
| | SLA 618 | 9/16 x 5/8 | |
| | SLA 6224 | 11/16 x 3/4 | |
| | SLA 626 | 13/16 x 7/8 | |
| TKO 6A | SLA 610 | 5/16 x 3/8 | 1,100 |
| | SLA 614 | 7/16 x 1/2 | |
| | SLA 6182 | 9/16 x 11/16 | |
| | SLA 621 | 5/8 x 3/4 | |
| | SLA 626 | 13/16 x 7/8 | |
| | SLA 630 | 15/16 x 1 | |

WHIT.

W



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKO 4W | SLW 602 | 1/8 x 3/16 | 830 |
| | SLW 604 | 1/4 x 5/16 | |
| | SLW 606 | 3/8 x 7/16 | |
| | SLW 608 | 1/2 x 9/16 | |
| TKO 6W | SLW 602 | 1/8 x 3/16 | 2,100 |
| | SLW 604 | 1/4 x 5/16 | |
| | SLW 606 | 3/8 x 7/16 | |
| | SLW 608 | 1/2 x 9/16 | |
| | SLW 610 | 5/8 x 11/16 | |
| | SLW 612 | 3/4 x 7/8 | |
| TKO 7W | SLW 602 | 1/8 x 3/16 | 1,350 |
| | SLW 603 | 3/16 x 1/4 | |
| | SLW 604 | 1/4 x 5/16 | |
| | SLW 605 | 5/16 x 3/8 | |
| | SLW 606 | 3/8 x 7/16 | |
| | SLW 607 | 7/16 x 1/2 | |
| | SLW 608 | 1/2 x 9/16 | |

# MINIATURE O/E WRENCHES & SETS

| PART No. | SIZE BA | L mm | g |
|---|---|---|---|
| OIB 600 | 0 x 2 | 89 | 25 |
| OIB 601 | 1 x 3 | 76 | 20 |
| OIB 602 | 2 x 4 | 76 | 20 |
| OIB 604 | 4 x 6 | 64 | 12 |
| OIB 605 | 5 x 7 | 64 | 10 |
| OIB 608 | 8 x 10 | 51 | 5 |

| PART No. | | SIZE BA | g |
|---|---|---|---|
| TKO 760W | OIB 600 | 0 x 2 | 100 |
| | OIB 601 | 1 x 3 | |
| | OIB 602 | 2 x 4 | |
| | OIB 604 | 4 x 6 | |
| | OIB 605 | 5 x 7 | |
| | OIB 608 | 8 x 10 | |




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# RING WRENCHES





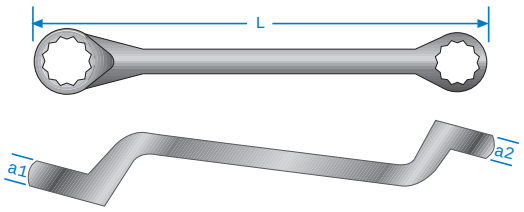


Hot forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated and nickel-chrome plated.
Deep cranked end for improved access.

Made to DIN 838

METRIC

**M**

| PART No. | SIZE | a1 mm | a2 mm | L mm | g |
|---|---|---|---|---|---|
| RSM 2057 | 5.5 x 7 | 6.0 | 6.5 | 170 | 50 |
| RSM 206 | 6 x 7 | 6.0 | 6.5 | 170 | 55 |
| RSM 208 | 8 x 9 | 6.5 | 7.5 | 180 | 75 |
| RSM 2080 | 8 x 10 | 6.5 | 7.5 | 185 | 80 |
| RSM 210 | 10 x 11 | 7.5 | 8.5 | 205 | 100 |
| RSM 2103 | 10 x 13 | 8.5 | 9.5 | 210 | 125 |
| RSM 212 | 12 x 13 | 9.0 | 9.5 | 215 | 130 |
| RSM 2137 | 13 x 17 | 9.5 | 11.5 | 245 | 200 |
| RSM 214 | 14 x 15 | 9.5 | 10.5 | 230 | 160 |
| RSM 216 | 16 x 17 | 11.0 | 11.5 | 250 | 210 |
| RSM 217 | 17 x 19 | 11.5 | 12.5 | 270 | 250 |
| RSM 218 | 18 x 19 | 11.0 | 11.5 | 265 | 260 |
| RSM 2192 | 19 x 22 | 12.5 | 13.5 | 285 | 325 |
| RSM 2194 | 19 x 24 | 12.5 | 13.5 | 305 | 375 |
| RSM 2202 | 20 x 22 | 12.5 | 13.5 | 290 | 325 |
| RSM 2213 | 21 x 23 | 12.5 | 13.5 | 310 | 370 |
| RSM 2224 | 22 x 24 | 12.0 | 13.5 | 310 | 365 |
| RSM 2240 | 24 x 30 | 13.5 | 15.5 | 340 | 510 |
| RSM 2246 | 24 x 26 | 13.0 | 14.0 | 330 | 450 |
| RSM 2247 | 24 x 27 | 13.5 | 14.5 | 330 | 450 |
| RSM 2258 | 25 x 28 | 14.0 | 15.0 | 350 | 500 |
| RSM 2270 | 27 x 30 | 15.0 | 14.5 | 350 | 520 |
| RSM 2272 | 27 x 32 | 15.0 | 16.5 | 365 | 650 |
| RSM 2302 | 30 x 32 | 14.5 | 15.0 | 360 | 660 |
| RSM 2306 | 30 x 36 | 15.8 | 16.5 | 400 | 810 |
| RSM 2326 | 32 x 36 | 16.5 | 17.5 | 410 | 825 |
| RSM 2361 | 36 x 41 | 17.5 | 20.5 | 450 | 1,200 |
| RSM 2416 | 41 x 46 | 20.0 | 20.5 | 500 | 1,600 |
| RSM 2460 | 46 x 50 | 20.0 | 21.0 | 540 | 1,900 |
| RSM 2550 | 55 x 60 | 25.5 | 26.5 | 625 | 3,300 |

AF

**AF**

| PART No. | SIZE | a1 mm | a2 mm | L mm | g |
|---|---|---|---|---|---|
| RSA 208 | 1/4 x 5/16 | 5.4 | 6.5 | 180 | 60 |
| RSA 210 | 5/16 x 3/8 | 7.0 | 7.5 | 190 | 75 |
| RSA 212 | 3/8 x 7/16 | 7.5 | 8.5 | 200 | 80 |
| RSA 214 | 7/16 x 1/2 | 8.5 | 9.5 | 173 | 110 |
| RSA 216 | 1/2 x 9/16 | 10.0 | 10.5 | 235 | 150 |
| RSA 218 | 9/16 x 5/8 | 9.5 | 10.5 | 235 | 150 |
| RSA 220 | 5/8 x 11/16 | 10.5 | 11.0 | 250 | 200 |
| RSA 221 | 5/8 x 3/4 | 11.5 | 12.5 | 270 | 260 |
| RSA 2224 | 11/16 x 3/4 | 12.0 | 12.5 | 275 | 260 |
| RSA 224 | 3/4 x 7/8 | 13.0 | 13.5 | 285 | 340 |
| RSA 226 | 13/16 x 7/8 | 12.5 | 13.5 | 285 | 340 |
| RSA 2284 | 7/8 x $1^{1}/_{16}$ | 13.5 | 14.5 | 325 | 450 |
| RSA 230 | 15/16 x 1 | 13.5 | 14.5 | 325 | 450 |
| RSA 2306 | 15/16 x $1^{1}/_{8}$ | 14.0 | 15.5 | 345 | 500 |
| RSA 236 | $1^{1}/_{16}$ x $1^{1}/_{4}$ | 14.5 | 15.0 | 360 | 650 |
| RSA 2382 | $1^{1}/_{8}$ x $1^{5}/_{16}$ | 15.0 | 16.5 | 365 | 650 |
| RSA 240 | $1^{1}/_{4}$ x $1^{7}/_{16}$ | 16.5 | 17.5 | 410 | 850 |
| RSA 242 | $1^{5}/_{16}$ x $1^{1}/_{2}$ | 16.5 | 17.5 | 410 | 840 |
| RSA 2462 | $1^{7}/_{16}$ x $1^{5}/_{8}$ | 17.5 | 19.5 | 460 | 1,100 |
| RSA 252 | $1^{5}/_{8}$ x $1^{13}/_{16}$ | 19.5 | 20.0 | 505 | 1,500 |
| RSA 255 | $1^{11}/_{16}$ x $1^{7}/_{8}$ | 20.5 | 20.5 | 500 | 1,500 |
| RSA 258 | $1^{13}/_{16}$ x 2 | 20.5 | 21.0 | 550 | 1,900 |

WHIT.

**W**

| PART No. | SIZE | a1 mm | a2 mm | L mm | g |
|---|---|---|---|---|---|
| RSW 202 | 1/8 x 3/16 | 8.0 | 8.5 | 200 | 90 |
| RSW 203 | 3/16 x 1/4 | 8.5 | 10.0 | 215 | 125 |
| RSW 204 | 1/4 x 5/16 | 10.0 | 10.5 | 235 | 160 |
| RSW 205 | 5/16 x 3/8 | 10.0 | 11.0 | 255 | 200 |
| RSW 206 | 3/8 x 7/16 | 11.5 | 12.5 | 280 | 260 |
| RSW 207 | 7/16 x 1/2 | 12.5 | 13.5 | 315 | 354 |
| RSW 208 | 1/2 x 9/16 | 13.5 | 14.5 | 325 | 460 |
| RSW 209 | 9/16 x 5/8 | 14.5 | 15.5 | 355 | 510 |
| RSW 210 | 5/8 x 3/4 | 15.0 | 16.5 | 365 | 624 |
| RSW 211 | 11/16 x 3/4 | 14.5 | 15.0 | 370 | 660 |
| RSW 212 | 3/4 x 7/8 | 16.5 | 17.5 | 410 | 851 |
| RSW 214 | 7/8 x 1 | 17.5 | 19.5 | 450 | 1,200 |
| RSW 216 | 1 x 1 $^{1}/_{8}$ | 19.5 | 20.5 | 505 | 1,500 |
| RSW 218 | 1 $^{1}/_{8}$ x 1 $^{1}/_{4}$ | 19.5 | 20.5 | 545 | 1,800 |

# RING WRENCH SETS



AF


## AF



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKR 4A | RSA 212 | 3/8 x 7/16 | 1,100 |
| | RSA 216 | 1/2 x 9/16 | |
| | RSA 220 | 5/8 x 11/16 | |
| | RSA 224 | 3/4 x 7/8 | |
| TKR 6A | RSA 210 | 5/16 x 3/8 | 1,400 |
| | RSA 214 | 7/16 x 1/2 | |
| | RSA 218 | 9/16 x 5/8 | |
| | RSA 220 | 5/8 x 11/16 | |
| | RSA 224 | 3/4 x 7/8 | |
| | RSA 230 | 15/16 x 1 | |

WHIT.

## W



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKR 4W | RSW 202 | 1/8 x 3/16 | 1,100 |
| | RSW 204 | 1/4 x 5/16 | |
| | RSW 206 | 3/8 x 7/16 | |
| | RSW 208 | 1/2 x 9/16 | |
| TKR 7W | RSW 202 | 1/8 x 3/16 | 1,450 |
| | RSW 203 | 3/16 x 1/4 | |
| | RSW 204 | 1/4 x 5/16 | |
| | RSW 205 | 5/16 x 3/8 | |
| | RSW 206 | 3/8 x 7/16 | |
| | RSW 207 | 7/16 x 1/2 | |
| | RSW 208 | 1/2 x 9/16 | |

METRIC

## M



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKR 7M | RSM 2057 | 5.5 x 7 | 1,050 |
| | RSM 208 | 8 x 9 | |
| | RSM 210 | 10 x 11 | |
| | RSM 212 | 12 x 13 | |
| | RSM 214 | 14 x 15 | |
| | RSM 216 | 16 x 17 | |
| | RSM 218 | 18 x 19 | |
| TKR 8M | RSM 206 | 6 x 7 | 1,400 |
| | RSM 208 | 8 x 9 | |
| | RSM 210 | 10 x 11 | |
| | RSM 212 | 12 x 13 | |
| | RSM 214 | 14 x 15 | |
| | RSM 216 | 16 x 17 | |
| | RSM 218 | 18 x 19 | |
| | RSM 2202 | 20 x 22 | |
| TKR 12M | RSM 206 | 6 x 7 | 3,500 |
| | RSM 208 | 8 x 9 | |
| | RSM 210 | 10 x 11 | |
| | RSM 212 | 12 x 13 | |
| | RSM 214 | 14 x 15 | |
| | RSM 216 | 16 x 17 | |
| | RSM 218 | 18 x 19 | |
| | RSM 2202 | 20 x 22 | |
| | RSM 2213 | 21 x 23 | |
| | RSM 2224 | 22 x 24 | |
| | RSM 2247 | 24 x 27 | |
| | RSM 2302 | 30 x 32 | |




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# COMBINATION WRENCHES





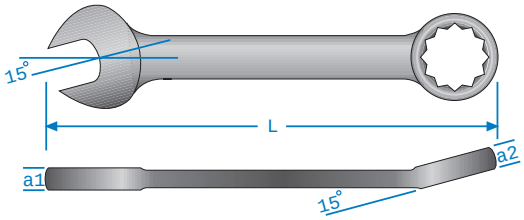


Hot forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated and nickel-chrome plated.

Made to DIN 3113

AF

## AF

| PART No. | SIZE | a1 mm | a2 mm | L mm | g |
|---|---|---|---|---|---|
| CSA 208 | 1/4 | 3.5 | 5.4 | 102 | 25 |
| CSA 210 | 5/16 | 4.5 | 6.0 | 113 | 30 |
| CSA 211 | 11/32 | 4.5 | 6.0 | 125 | 28 |
| CSA 212 | 3/8 | 4.5 | 6.5 | 145 | 55 |
| CSA 214 | 7/16 | 4.5 | 6.5 | 159 | 60 |
| CSA 216 | 1/2 | 5.0 | 7.5 | 182 | 90 |
| CSA 218 | 9/16 | 5.0 | 8.5 | 193 | 100 |
| CSA 220 | 5/8 | 6.0 | 9.5 | 201 | 125 |
| CSA 222 | 11/16 | 6.0 | 9.5 | 210 | 140 |
| CSA 224 | 3/4 | 7.0 | 11.5 | 231 | 160 |
| CSA 226 | 13/16 | 7.0 | 12.0 | 252 | 200 |
| CSA 228 | 7/8 | 7.5 | 12.5 | 255 | 248 |
| CSA 230 | 15/16 | 7.5 | 13.5 | 262 | 290 |
| CSA 232 | 1 | 7.0 | 13.2 | 262 | 260 |
| CSA 234 | $1^{1}/_{16}$ | 8.5 | 14.5 | 278 | 360 |
| CSA 236 | $1^{1}/_{8}$ | 8.5 | 14.5 | 275 | 370 |
| CSA 240 | $1^{1}/_{4}$ | 10.0 | 16.5 | 297 | 490 |

METRIC


## M

| PART No. | SIZE | a1 mm | a2 mm | L mm | g |
|---|---|---|---|---|---|
| CSM 206 | 6 | 3.5 | 5.4 | 100 | 25 |
| CSM 207 | 7 | 3.5 | 5.0 | 105 | 25 |
| CSM 208 | 8 | 4.0 | 5.5 | 115 | 30 |
| CSM 209 | 9 | 4.0 | 6.5 | 127 | 40 |
| CSM 210 | 10 | 4.5 | 6.5 | 146 | 50 |
| CSM 211 | 11 | 5.0 | 6.5 | 158 | 55 |
| CSM 212 | 12 | 5.0 | 8.0 | 173 | 60 |
| CSM 213 | 13 | 5.0 | 8.0 | 182 | 90 |
| CSM 214 | 14 | 5.0 | 8.5 | 193 | 100 |
| CSM 215 | 15 | 5.7 | 8.8 | 198 | 110 |
| CSM 216 | 16 | 6.3 | 9.2 | 202 | 110 |
| CSM 217 | 17 | 6.5 | 9.5 | 210 | 140 |
| CSM 218 | 18 | 6.0 | 10.0 | 220 | 150 |
| CSM 219 | 19 | 6.5 | 11.5 | 230 | 160 |
| CSM 220 | 20 | 7.0 | 12.0 | 238 | 160 |
| CSM 221 | 21 | 7.0 | 12.0 | 253 | 215 |
| CSM 222 | 22 | 7.5 | 12.0 | 255 | 240 |
| CSM 223 | 23 | 7.0 | 13.0 | 260 | 250 |
| CSM 224 | 24 | 7.0 | 13.5 | 262 | 275 |
| CSM 225 | 25 | 7.0 | 13.5 | 263 | 275 |
| CSM 226 | 26 | 8.0 | 14.0 | 270 | 350 |
| CSM 227 | 27 | 8.5 | 14.5 | 277 | 350 |
| CSM 228 | 28 | 8.5 | 14.5 | 278 | 350 |
| CSM 230 | 30 | 9.5 | 15.5 | 295 | 450 |
| CSM 232 | 32 | 10.0 | 16.5 | 300 | 460 |
| CSM 236 | 36 | 9.5 | 17.5 | 332 | 725 |
| CSM 241 | 41 | 13.0 | 21.0 | 470 | 1,300 |
| CSM 246 | 46 | 14.0 | 23.0 | 520 | 1,850 |
| CSM 250 | 50 | 16.5 | 25.0 | 560 | 2,260 |

WHIT.

## W

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| CSW 202 | 1/8 | 4.1 | 124 | 24 |
| CSW 203 | 3/16 | 5 | 143 | 37 |
| CSW 204 | 1/4 | 5.4 | 170 | 60 |
| CSW 205 | 5/16 | 6.4 | 183 | 86 |
| CSW 206 | 3/8 | 6.9 | 214 | 130 |
| CSW 207 | 7/16 | 7.9 | 238 | 195 |
| CSW 208 | 1/2 | 8.5 | 278 | 286 |
| CSW 209 | 9/16 | 8.7 | 278 | 279 |
| CSW 210 | 5/8 | 9.4 | 300 | 356 |
| CSW 211 | 11/16 | 10.8 | 333 | 493 |
| CSW 212 | 3/4 | 10.9 | 300 | 566 |

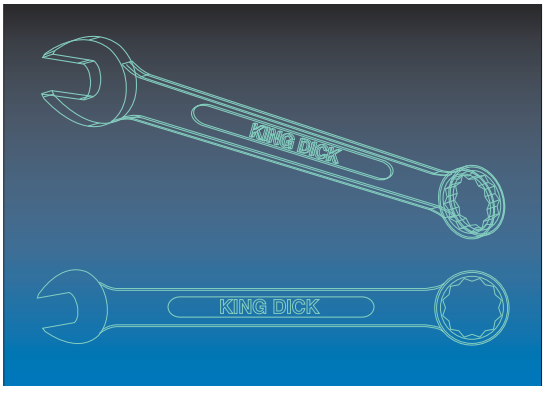

# COMBINATION WRENCH SETS

METRIC

**M**

| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKC 5M | CSM 207 | 7 | 358 |
| | CSM 208 | 8 | |
| | CSM 210 | 10 | |
| | CSM 213 | 13 | |
| | CSM 217 | 17 | |
| TKC 7M | CSM 210 | 10 | 560 |
| | CSM 211 | 11 | |
| | CSM 212 | 12 | |
| | CSM 213 | 13 | |
| | CSM 214 | 14 | |
| | CSM 217 | 17 | |
| | CSM 219 | 19 | |
| TKC 8M | CSM 211 | 11 | 1,200 |
| | CSM 212 | 12 | |
| | CSM 213 | 13 | |
| | CSM 214 | 14 | |
| | CSM 217 | 17 | |
| | CSM 219 | 19 | |
| | CSM 222 | 22 | |
| | CSM 224 | 24 | |
| TKC 12M | CSM 208 | 8 | 1,095 |
| | CSM 209 | 9 | |
| | CSM 210 | 10 | |
| | CSM 211 | 11 | |
| | CSM 212 | 12 | |
| | CSM 213 | 13 | |
| | CSM 214 | 14 | |
| | CSM 215 | 15 | |
| | CSM 216 | 16 | |
| | CSM 217 | 17 | |
| | CSM 218 | 18 | |
| | CSM 219 | 19 | |
| TKC 23M | CSM 208 | 8 | 4,500 |
| | CSM 209 | 9 | |
| | CSM 210 | 10 | |
| | CSM 211 | 11 | |
| | CSM 212 | 12 | |
| | CSM 213 | 13 | |
| | CSM 214 | 14 | |
| | CSM 215 | 15 | |
| | CSM 216 | 16 | |
| | CSM 217 | 17 | |
| | CSM 218 | 18 | |
| | CSM 219 | 19 | |
| | CSM 220 | 20 | |
| | CSM 221 | 21 | |
| | CSM 222 | 22 | |
| | CSM 223 | 23 | |
| | CSM 224 | 24 | |
| | CSM 225 | 25 | |
| | CSM 226 | 26 | |
| | CSM 227 | 27 | |
| | CSM 228 | 28 | |
| | CSM 230 | 30 | |
| | CSM 232 | 32 | |




AF

**AF**


| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKC 5A | CSA 208 | 1/4 | 274 |
| | CSA 210 | 5/16 | |
| | CSA 212 | 3/8 | |
| | CSA 214 | 7/16 | |
| | CSA 216 | 1/2 | |
| TKC 6A | CSA 214 | 7/16 | 575 |
| | CSA 216 | 1/2 | |
| | CSA 218 | 9/16 | |
| | CSA 220 | 5/8 | |
| | CSA 222 | 11/16 | |
| | CSA 224 | 3/4 | |
| TKC 8A | CSA 212 | 3/8 | 1,000 |
| | CSA 214 | 7/16 | |
| | CSA 216 | 1/2 | |
| | CSA 218 | 9/16 | |
| | CSA 220 | 5/8 | |
| | CSA 222 | 11/16 | |
| | CSA 224 | 3/4 | |
| | CSA 228 | 7/8 | |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# COMBINATION WRENCH SETS

WHIT.
W



| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKC 5W | CSW 202 | 1/8 | 337 |
| | CSW 203 | 3/16 | |
| | CSW 204 | 1/4 | |
| | CSW 205 | 5/16 | |
| | CSW 206 | 3/8 | |
| TKC 7W | CSW 203 | 3/16 | 1073 |
| | CSW 204 | 1/4 | |
| | CSW 205 | 5/16 | |
| | CSW 206 | 3/8 | |
| | CSW 207 | 7/16 | |
| | CSW 208 | 1/2 | |
| | CSW 209 | 9/16 | |

| PART No. | | SIZE | g (SET) |
|---|---|---|---|
| TKC 10W | CSW 202 | 1/8 | 1,946 |
| | CSW 203 | 3/16 | |
| | CSW 204 | 1/4 | |
| | CSW 205 | 5/16 | |
| | CSW 206 | 3/8 | |
| | CSW 207 | 7/16 | |
| | CSW 208 | 1/2 | |
| | CSW 209 | 9/16 | |
| | CSW 210 | 5/8 | |
| | CSW 211 | 11/16 | |

All sets supplied in plastic wallet
All spanners in the above sets can be sold individually

# MINIATURE WRENCH SETS





**TKCM 8A**


| | SIZE AF | g (SET) |
|---|---|---|
| MCA 205 | 5/32 | 118 |
| MCA 206 | 3/16 | |
| MCA 207 | 7/32 | |
| MCA 2075 | 15/64 | |
| MCA 208 | 1/4 | |
| MCA 209 | 9/32 | |
| MCA 210 | 5/16 | |
| MCA 211 | 11/32 | |

**TKCM 8M**

| | SIZE MM | g (SET) |
|---|---|---|
| MCM 204 | 4 | 118 |
| MCM 2045 | 4.5 | |
| MCM 205 | 5 | |
| MCM 2055 | 5.5 | |
| MCM 206 | 6 | |
| MCM 207 | 7 | |
| MCM 208 | 8 | |
| MCM 209 | 9 | |

# CAUTION

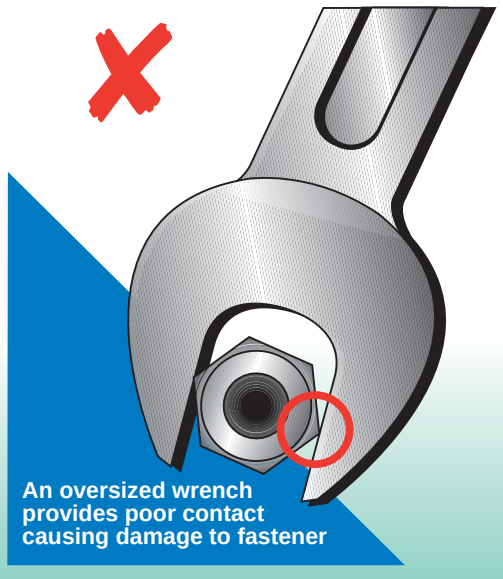

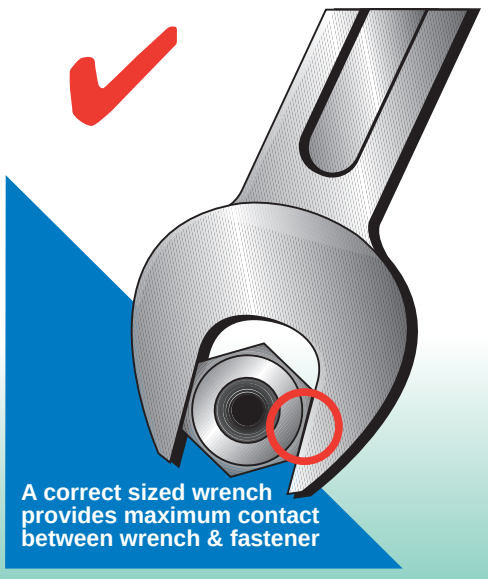
# RATCHET COMBINATION




METRIC

M

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| KGW 3408 | 8 | 4 | 140 | 40 |
| KGW 3409 | 9 | 5 | 149 | 42 |
| KGW 3410 | 10 | 5 | 159 | 64 |
| KGW 3411 | 11 | 5.6 | 165 | 71 |
| KGW 3412 | 12 | 6 | 171 | 79 |
| KGW 3413 | 13 | 6 | 178 | 95 |
| KGW 3414 | 14 | 6.2 | 190 | 116 |
| KGW 3415 | 15 | 6.6 | 199 | 135 |
| KGW 3416 | 16 | 7 | 208 | 156 |
| KGW 3417 | 17 | 7 | 225 | 181 |
| KGW 3418 | 18 | 7.7 | 236 | 199 |
| KGW 3419 | 19 | 8 | 248 | 216 |

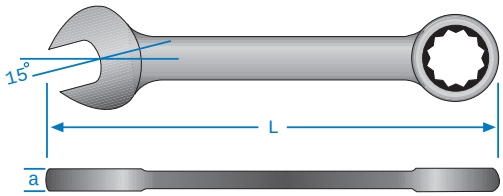


Hot forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated and nickel-chrome plated.

Ring end features 72 tooth off-the-point drive ratchet, within slim forging for improved access.

AF

AF

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| KGW 3431 | 5/16 | 4.2 | 140 | 26 |
| KGW 3432 | 3/8 | 5.5 | 160 | 50 |
| KGW 3433 | 7/16 | 5.6 | 166 | 54 |
| KGW 3434 | 1/2 | 5.8 | 180 | 71 |
| KGW 3435 | 9/16 | 6.2 | 190 | 94 |
| KGW 3436 | 5/8 | 7 | 210 | 127 |
| KGW 3437 | 11/16 | 7.4 | 225 | 146 |
| KGW 3438 | 3/4 | 8.10 | 247 | 190 |

## ADAPTORS

| PART No. | SIZE | L mm | g |
|---|---|---|---|
| KGW 2691 | 10mm Hex x 1/4SD Male | 25 | 10 |
| KGW 2692 | 13mm Hex x 3/8SD Male | 30 | 25 |
| KGW 2693 | 19mm Hex x 1/2SD Male | 32 | 52 |
| KGW 2694 | 10mm Hex x 1/4SD Female | 25.3 | 10 |

# RATCHET COMBINATION SETS

| PART No. | | | g (SET) |
|---|---|---|---|
| KGW 3425 | 6 PIECE SET metric | KGW3410 | 462 |
| | | KGW3413 | |
| | | KGW3419 | |
| | | KGW2691 | |
| | | KGW2692 | |
| | | KGW2693 | |
| KGW 3426 | 6 PIECE SET metric | KGW3408 | 1,000 |
| | | KGW3410 | |
| | | KGW3412 | |
| | | KGW3413 | |
| | | KGW3417 | |
| | | KGW3419 | |

| PART No. | | | g (SET) |
|---|---|---|---|
| KGW 3428 | 12 PIECE SET metric | KGW3408 | 1,600 |
| | | KGW3409 | |
| | | KGW3410 | |
| | | KGW3411 | |
| | | KGW3412 | |
| | | KGW3413 | |
| | | KGW3414 | |
| | | KGW3415 | |
| | | KGW3416 | |
| | | KGW3417 | |
| | | KGW3418 | |
| | | KGW3419 | |




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# OPEN END PODGER





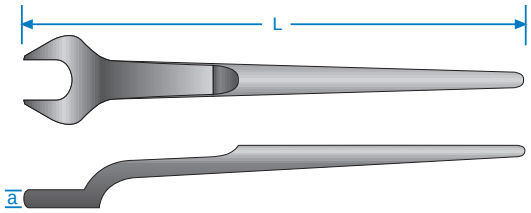


Hot forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated and zinc-plated.
Powerful, high quality steel provides extra strength for extra leverage.

Made to DIN 475

METRIC

**M**

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| OPM 414 | 14 | 9 | 230 | 175 |
| OPM 417 | 17 | 10 | 305 | 280 |
| OPM 419 | 19 | 10 | 305 | 270 |
| OPM 422 | 22 | 13 | 380 | 660 |
| OPM 424 | 24 | 13 | 380 | 660 |
| OPM 427 | 27 | 16 | 430 | 980 |
| OPM 430 | 30 | 16 | 430 | 1,000 |
| OPM 432 | 32 | 17 | 485 | 1,430 |
| OPM 436 | 36 | 19 | 540 | 2,075 |
| OPM 441 | 41 | 21 | 585 | 2,815 |
| OPM 446 | 46 | 22 | 635 | 3,935 |
| OPM 450 | 50 | 22 | 635 | 3,845 |
| OPM 455 | 55 | 27 | 690 | 5,935 |
| OPM 460 | 60 | 27 | 690 | 6,000 |

WHIT.

**W**

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| OPW 204 | 1/4 | 9 | 230 | 215 |
| OPW 205 | 5/16 | 9 | 230 | 190 |
| OPW 206 | 3/8 | 10 | 305 | 290 |
| OPW 207 | 7/16 | 13 | 380 | 660 |
| OPW 208 | 1/2 | 13 | 380 | 688 |
| OPW 209 | 9/16 | 16 | 430 | 1,010 |
| OPW 210 | 5/8 | 16 | 430 | 990 |
| OPW 211 | 11/16 | 17 | 485 | 1,415 |
| OPW 212 | 3/4 | 17 | 485 | 1,445 |
| OPW 213 | 13/16 | 19 | 540 | 2,015 |
| OPW 214 | 7/8 | 19 | 540 | 1,980 |
| OPW 215 | 15/16 | 21 | 585 | 2,845 |
| OPW 216 | 1 | 21 | 585 | 2,820 |
| OPW 218 | $1^{1}/_{8}$ | 22 | 635 | 4,040 |
| OPW 220 | $1^{1}/_{4}$ | 22 | 635 | 3,630 |
| OPW 222 | $1^{3}/_{8}$ | 27 | 690 | 6,085 |
| OPW 224 | $1^{1}/_{2}$ | 27 | 690 | 5,895 |

**CAUTION!**
Always treat the pointed end of a podger with respect


AF

**AF**

| PART No. | SIZE | a mm | L mm | g |
|---|---|---|---|---|
| OPA 316 | 1/2 | 9 | 230 | 200 |
| OPA 318 | 9/16 | 9 | 230 | 195 |
| OPA 320 | 5/8 | 9 | 230 | 185 |
| OPA 322 | 11/16 | 10 | 305 | 280 |
| OPA 324 | 3/4 | 10 | 305 | 270 |
| OPA 326 | 13/16 | 13 | 380 | 650 |
| OPA 328 | 7/8 | 13 | 380 | 660 |
| OPA 330 | 15/16 | 13 | 380 | 655 |
| OPA 332 | 1 | 16 | 430 | 1,020 |
| OPA 334 | $1\ ^{1}/_{16}$ | 16 | 430 | 975 |
| OPA 336 | $1\ ^{1}/_{8}$ | 16 | 430 | 970 |
| OPA 338 | $1^{3}/_{16}$ | 16 | 430 | 985 |
| OPA 340 | $1^{1}/_{4}$ | 17 | 485 | 1,435 |
| OPA 342 | $1^{5}/_{16}$ | 17 | 485 | 1,385 |
| OPA 346 | $1^{7}/_{16}$ | 19 | 540 | 1,870 |
| OPA 348 | $1^{1}/_{2}$ | 19 | 540 | 1,935 |
| OPA 352 | $1^{5}/_{8}$ | 21 | 585 | 2,775 |
| OPA 354 | $1^{11}/_{16}$ | 21 | 585 | 2,795 |
| OPA 358 | $1^{13}/_{16}$ | 22 | 635 | 3,840 |
| OPA 360 | $1^{7}/_{8}$ | 22 | 635 | 3,785 |
| OPA 364 | 2 | 22 | 635 | 3,775 |
| OPA 366 | $2^{1}/_{16}$ | 22 | 635 | 3,610 |
| OPA 370 | $2^{3}/_{16}$ | 27 | 690 | 5,875 |
| OPA 372 | $2^{1}/_{4}$ | 27 | 690 | 6,010 |
| OPA 376 | $2^{3}/_{8}$ | 27 | 690 | 5,760 |

# RING PODGER



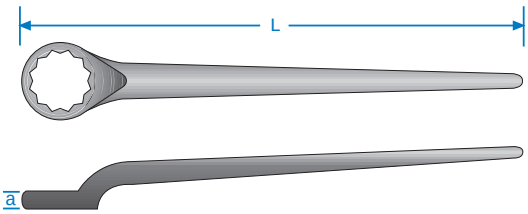


Hot forged from 31CrV3 Chrome Vanadium Steel. Precisely machined, heat treated and black oxide finish.provides extra strength for extra leverage. recomeneded to used in field operationon ANSI B 16.5 Class 600 Flanges,45 degree off set handle 12 points..

Made to DIN 475

METRIC

M

| PART No. | SIZE | a mm | L mm |
|---|---|---|---|
| PRM 414 | 14 | 10 | 205 |
| PRM 417 | 17 | 13 | 205 |
| PRM 419 | 19 | 13 | 255 |
| PRM 422 | 22 | 17 | 305 |
| PRM 424 | 24 | 17 | 305 |
| PRM 427 | 27 | 21 | 380 |
| PRM 430 | 30 | 22 | 460 |
| PRM 432 | 32 | 22 | 460 |
| PRM 436 | 36 | 24 | 535 |
| PRM 441 | 41 | 27 | 560 |
| PRM 446 | 46 | 30 | 585 |
| PRM 450 | 50 | 30 | 585 |
| PRM 455 | 55 | 35 | 635 |
| PRM 460 | 60 | 35 | 635 |

AF

AF

| PART No. | SIZE | a mm | L mm |
|---|---|---|---|
| PRA 316 | 1/2 | 10 | 205 |
| PRA 318 | 9/16 | 10 | 205 |
| PRA 320 | 5/8 | 10 | 205 |
| PRA 322 | 11/16 | 13 | 255 |
| PRA 324 | 3/4 | 13 | 255 |
| PRA 326 | 13/16 | 17 | 305 |
| PRA 328 | 7/8 | 17 | 305 |
| PRA 330 | 15/16 | 17 | 305 |
| PRA 332 | 1 | 21 | 380 |
| PRA 334 | 1 1/16 | 21 | 380 |
| PRA 336 | 1 1/8 | 21 | 380 |
| PRA 340 | 1 1/4 | 22 | 460 |
| PRA 342 | 1 5/16 | 22 | 460 |
| PRA 346 | 1 7/16 | 24 | 535 |
| PRA 348 | 1 1/2 | 24 | 535 |
| PRA 352 | 1 5/8 | 27 | 560 |
| PRA 354 | 1 11/16 | 27 | 560 |
| PRA 356 | 1 3/4 | 30 | 585 |
| PRA 358 | 1 13/16 | 30 | 585 |
| PRA 360 | 1 7/8 | 30 | 585 |
| PRA 364 | 2 | 30 | 585 |
| PRA 366 | 2 1/16 | 30 | 585 |
| PRA 370 | 2 3/16 | 35 | 635 |
| PRA 372 | 2 1/4 | 35 | 635 |
| PRA 376 | 2 3/8 | 35 | 635 |

WHIT.

W


| PART No. | SIZE | a mm | L mm |
|---|---|---|---|
| PRW 204 | 1/4 | 10 | 205 |
| PRW 205 | 5/16 | 10 | 205 |
| PRW 206 | 3/8 | 13 | 255 |
| PRW 207 | 7/16 | 17 | 305 |
| PRW 208 | 1/2 | 17 | 305 |
| PRW 209 | 9/16 | 21 | 380 |
| PRW 210 | 5/8 | 21 | 380 |
| PRW 211 | 11/16 | 22 | 460 |
| PRW 212 | 3/4 | 22 | 460 |
| PRW 213 | 13/16 | 24 | 535 |
| PRW 214 | 7/8 | 24 | 535 |
| PRW 215 | 15/16 | 27 | 560 |
| PRW 216 | 1 | 27 | 560 |
| PRW 218 | 1 1/8 | 30 | 585 |
| PRW 220 | 1 1/4 | 30 | 585 |
| PRW 222 | 1 3/8 | 35 | 635 |
| PRW 224 | 1 1/2 | 35 | 635 |

**CAUTION!**
Always treat the pointed end of a podger with respect

diamentions mentioned here can be differ from actual tool

# RATCHET PODGER



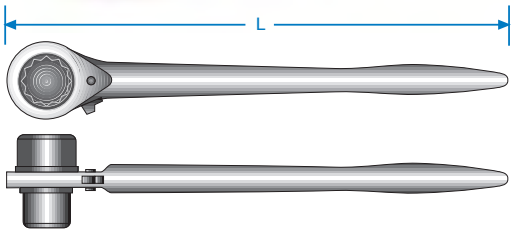


Hot forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated and bright zinc-plated.
Feature two off-the-point drive socket heads of different sizes, within heavy duty 32 tooth ratchet mechanism.

| PART No. | SIZE | L mm | g |
|---|---|---|---|
| **RRP 1317** | 13 x 17 | 280 | 240 |
| **RRP 1719** | 17 x 19 | 315 | 440 |
| **RRP 1721** | 17 x 21 | 315 | 420 |
| **RRP 1922** | 19 x 22 | 315 | 420 |
| **RRP 1924** | 19 x 24 | 362 | 760 |

| PART No. | SIZE | L mm | g |
|---|---|---|---|
| **RRP 2427** | 24 x 27 | 362 | 760 |
| **RRP 2430** | 24 x 30 | 443 | 1,220 |
| **RRP 2730** | 27 x 30 | 443 | 1,220 |
| **RRP 3032** | 30 x 32 | 443 | 1,220 |
| **RRP 3236** | 32 x 36 | 443 | 1,220 |


# ADJUSTABLE WRENCHES



Forged from 31 CrV3 Chrome Vanadium Steel.
Precisely machined, heat-treated.
Bright nickel-chrome plated or Black phosphated finishes.
Scale graduation on side of jaw.

## CHROME FINISH

| PART No. | SIZE | Capacity mm | g |
|---|---|---|---|
| **ACW 206** | **6”** (153mm) | 18 | 140 |
| **ACW 208** | **8”** (202mm) | 25 | 240 |
| **ACW 210** | **10”** (254mm) | 28 | 400 |
| **ACW 212** | **12”** (305mm) | 33 | 610 |

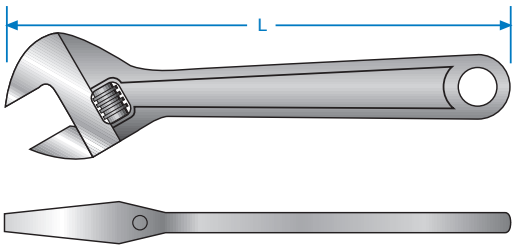


## SATIN CHROME FINISH

| PART No. | SIZE | Capacity mm | g |
|---|---|---|---|
| **ASW 206** | **6”** (153mm) | 18 | 140 |
| **ASW 208** | **8”** (202mm) | 25 | 240 |
| **ASW 210** | **10”** (254mm) | 28 | 400 |
| **ASW 212** | **12”** (305mm) | 33 | 610 |


## PHOSPHATE FINISH

| PART No. | SIZE | Capacity mm | g |
|---|---|---|---|
| **APW 206** | **6”** (153mm) | 18 | 140 |
| **APW 208** | **8”** (202mm) | 25 | 240 |
| **APW 210** | **10”** (254mm) | 28 | 400 |
| **APW 212** | **12”** (305mm) | 33 | 610 |

# ADJUSTABLE HOOK





Forged from 31CrV3 Chrome Vanadium Steel.
Precisely machined and heat-treated.
Bright nickel-chrome plated finish.

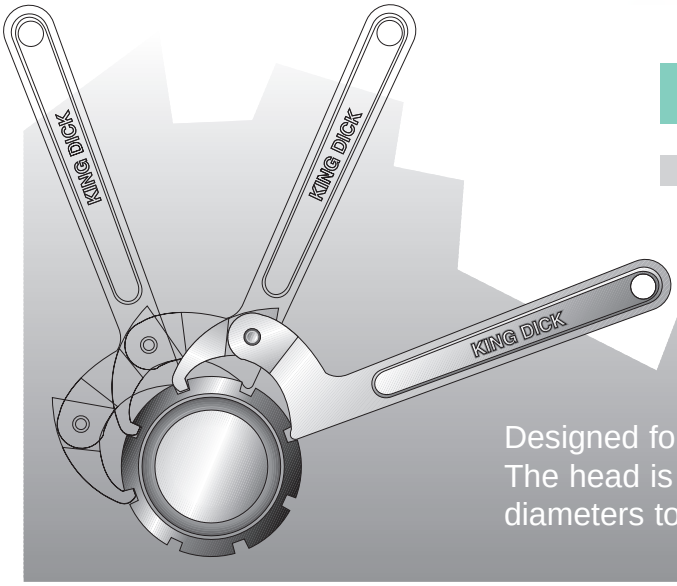



| PART No. | Capacity O/Dia. mm | L mm | g |
|---|---|---|---|
| AHS 408 | 32-72 | 216 | 250 |
| AHS 411 | 51-120 | 267 | 450 |

Designed for use with slotted retaining rings. The head is hinged allowing a wide range of diameters to be catered for.

# CAUTION

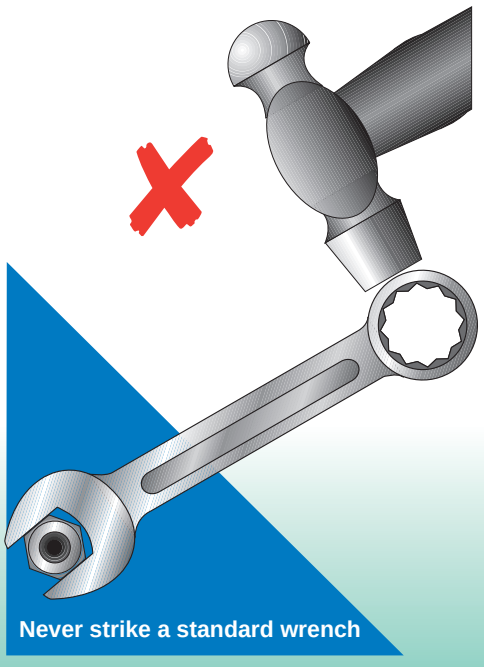


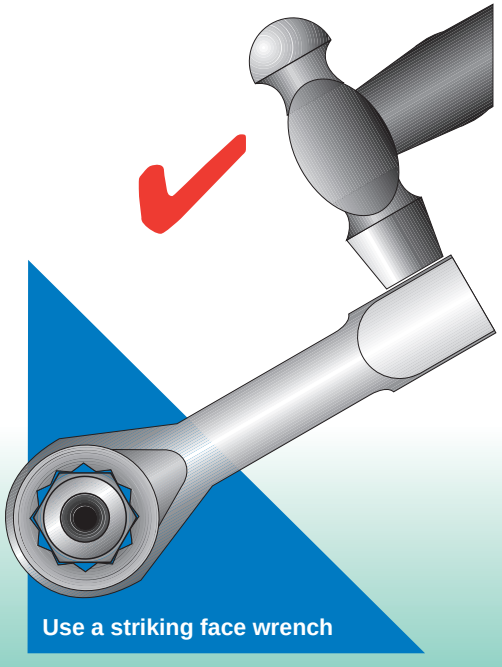



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# SLOGGING RING

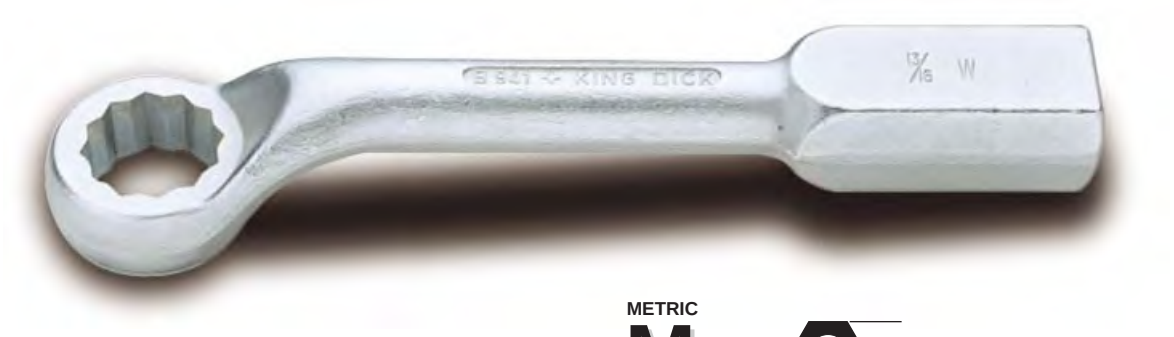


Hot forged from 31CrV3 Chrome Vanadium Steel.
Precisely machined, heat treated and black oxide finish.
45 degree off set handle, 12 points, Powerful, high quality steel provides extra strength for extra leverage.
Recomended to be used in field operation on ANSIB 16.5 class 600 Flanges.

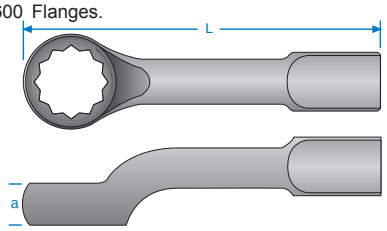


AF

**AF**

| PART No. | SIZE | a mm | L mm |
|---|---|---|---|
| SFA 234 | 1 1/16 | 21 | 265 |
| SFA 236 | 1 1/8 | 22 | 280 |
| SFA 238 | 1 3/16 | 22 | 280 |
| SFA 240 | 1 1/4 | 22 | 280 |
| SFA 242 | 1 5/16 | 25 | 295 |
| SFA 244 | 1 3/8 | 25 | 295 |
| SFA 246 | 1 7/16 | 25 | 295 |
| SFA 248 | 1 1/2 | 27 | 305 |
| SFA 252 | 1 5/8 | 27 | 305 |
| SFA 254 | 1 11/16 | 30 | 320 |
| SFA 256 | 1 3/4 | 30 | 320 |
| SFA 258 | 1 13/16 | 30 | 320 |
| SFA 260 | 1 7/8 | 30 | 320 |
| SFA 264 | 2 | 36 | 330 |
| SFA 266 | 2 1/16 | 36 | 330 |
| SFA 270 | 2 3/16 | 36 | 330 |
| SFA 272 | 2 1/4 | 36 | 330 |
| SFA 274 | 2 5/16 | 39 | 360 |
| SFA 276 | 2 3/8 | 39 | 360 |
| SFA 278 | 2 7/16 | 39 | 360 |
| SFA 280 | 2 1/2 | 39 | 360 |
| SFA 282 | 2 9/16 | 39 | 360 |
| SFA 284 | 2 5/8 | 39 | 360 |
| SFA 288 | 2 3/4 | 44 | 380 |
| SFA 292 | 2 7/8 | 44 | 380 |
| SFA 294 | 2 15/16 | 44 | 380 |
| SFA 296 | 3 | 44 | 380 |
| SFA 299 | 3 1/8 | 44 | 380 |
| SFA 308 | 3 3/8 | 57 | 450 |
| SFA 312 | 3 1/2 | 57 | 450 |
| SFA 320 | 3 3/4 | 57 | 450 |
| SFA 324 | 3 7/8 | 57 | 450 |
| SFA 332 | 4 1/8 | 57 | 450 |
| SFA 336 | 4 1/4 | 57 | 450 |
| SFA 344 | 4 1/2 | 57 | 450 |
| SFA 348 | 4 5/8 | 57 | 450 |

METRIC

**M**

| PART No. | SIZE mm | a mm | L mm |
|---|---|---|---|
| SFM 427 | 27 | 21 | 265 |
| SFM 430 | 30 | 22 | 280 |
| SFM 432 | 32 | 22 | 280 |
| SFM 436 | 36 | 25 | 295 |
| SFM 441 | 41 | 27 | 305 |
| SFM 446 | 46 | 30 | 320 |
| SFM 450 | 50 | 36 | 330 |
| SFM 455 | 55 | 36 | 330 |
| SFM 460 | 60 | 39 | 360 |
| SFM 465 | 65 | 39 | 360 |
| SFM 470 | 70 | 44 | 380 |
| SFM 475 | 75 | 44 | 380 |
| SFM 480 | 80 | 44 | 380 |
| SFM 485 | 85 | 57 | 450 |
| SFM 490 | 90 | 57 | 450 |
| SFM 495 | 95 | 57 | 450 |
| SFM 500 | 100 | 57 | 450 |
| SFM 505 | 105 | 57 | 450 |
| SFM 510 | 110 | 57 | 450 |
| SFM 515 | 115 | 57 | 450 |

WHIT.

**W**

| PART No. | SIZE | a mm | L mm |
|---|---|---|---|
| SFW 209 | 9/16 | 21 | 265 |
| SFW 210 | 5/8 | 22 | 280 |
| SFW 211 | 11/16 | 22 | 280 |
| SFW 212 | 3/4 | 25 | 295 |
| SFW 213 | 13/16 | 25 | 295 |
| SFW 214 | 7/8 | 27 | 305 |
| SFW 215 | 15/16 | 27 | 305 |
| SFW 216 | 1 | 30 | 320 |
| SFW 218 | 1 1/8 | 30 | 320 |
| SFW 220 | 1 1/4 | 36 | 330 |
| SFW 222 | 1 3/8 | 36 | 330 |
| SFW 224 | 1 1/2 | 39 | 360 |
| SFW 226 | 1 5/8 | 39 | 360 |
| SFW 228 | 1 3/4 | 44 | 380 |
| SFW 230 | 1 7/8 | 44 | 380 |
| SFW 232 | 2 | 44 | 380 |
| SFW 236 | 2 1/4 | 57 | 450 |
| SFW 240 | 2 1/2 | 57 | 450 |
| SFW 244 | 2 3/4 | 57 | 450 |
| SFW 248 | 3 | 57 | 450 |
| SFW 252 | 3 1/4 | 57 | 450 |
| SFW 256 | 3 1/2 | 57 | 450 |

# SINGLE OPEN END





Forged from Carbon Steel.
Precisely machined, heat treated and bright plated.


Made to DIN 894

| PART No. | SIZE mm | a mm | L mm | g |
|---|---|---|---|---|
| SOE 89408 | 8 | 4 | 95 | 16 |
| SOE 89410 | 10 | 5 | 105 | 22 |
| SOE 89411 | 11 | 5.5 | 115 | 25 |
| SOE 89412 | 12 | 5.5 | 125 | 30 |
| SOE 89413 | 13 | 6 | 135 | 40 |
| SOE 89414 | 14 | 6 | 140 | 45 |
| SOE 89415 | 15 | 6 | 145 | 45 |
| SOE 89417 | 17 | 6.5 | 150 | 60 |
| SOE 89419 | 19 | 7.5 | 170 | 80 |
| SOE 89422 | 22 | 8.5 | 195 | 120 |
| SOE 89424 | 24 | 9.5 | 215 | 145 |

| PART No. | SIZE mm | a mm | L mm | g |
|---|---|---|---|---|
| SOE 89427 | 27 | 10.5 | 240 | 195 |
| SOE 89430 | 30 | 11.5 | 260 | 260 |
| SOE 89432 | 32 | 12.5 | 275 | 320 |
| SOE 89436 | 36 | 13.5 | 305 | 430 |
| SOE 89441 | 41 | 15 | 340 | 580 |
| SOE 89446 | 46 | 16 | 380 | 800 |
| SOE 89450 | 50 | 17 | 410 | 1020 |
| SOE 89455 | 55 | 18 | 440 | 1150 |
| SOE 89460 | 60 | 19 | 475 | 1600 |
| SOE 89465 | 65 | 20 | 510 | 1950 |

# CAUTION

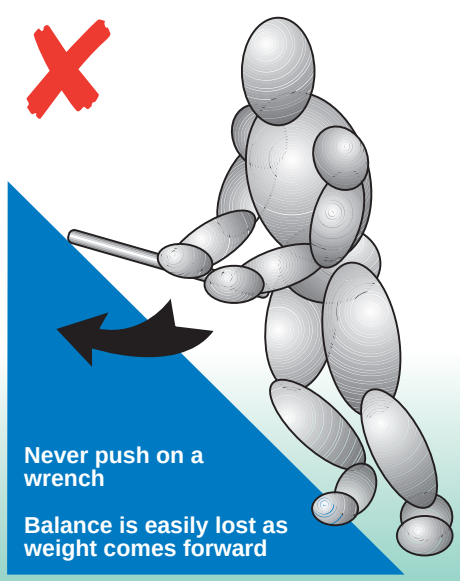

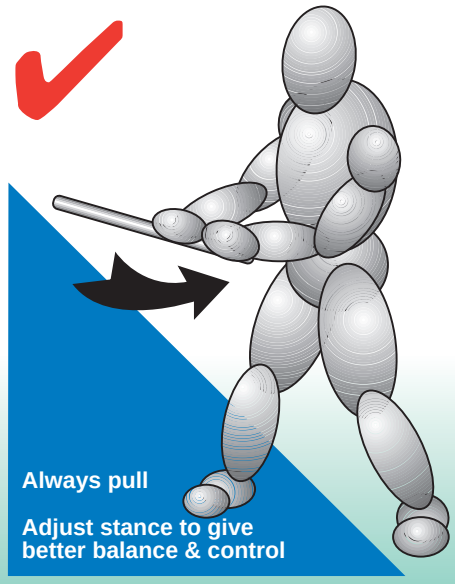



All **KING DICK** wrenches can be provided in sets to meet your own specific requirements.

Just ring sales and ask for details.



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

ABI ail: info@kingdicktool.com, www.kingdicktool.com

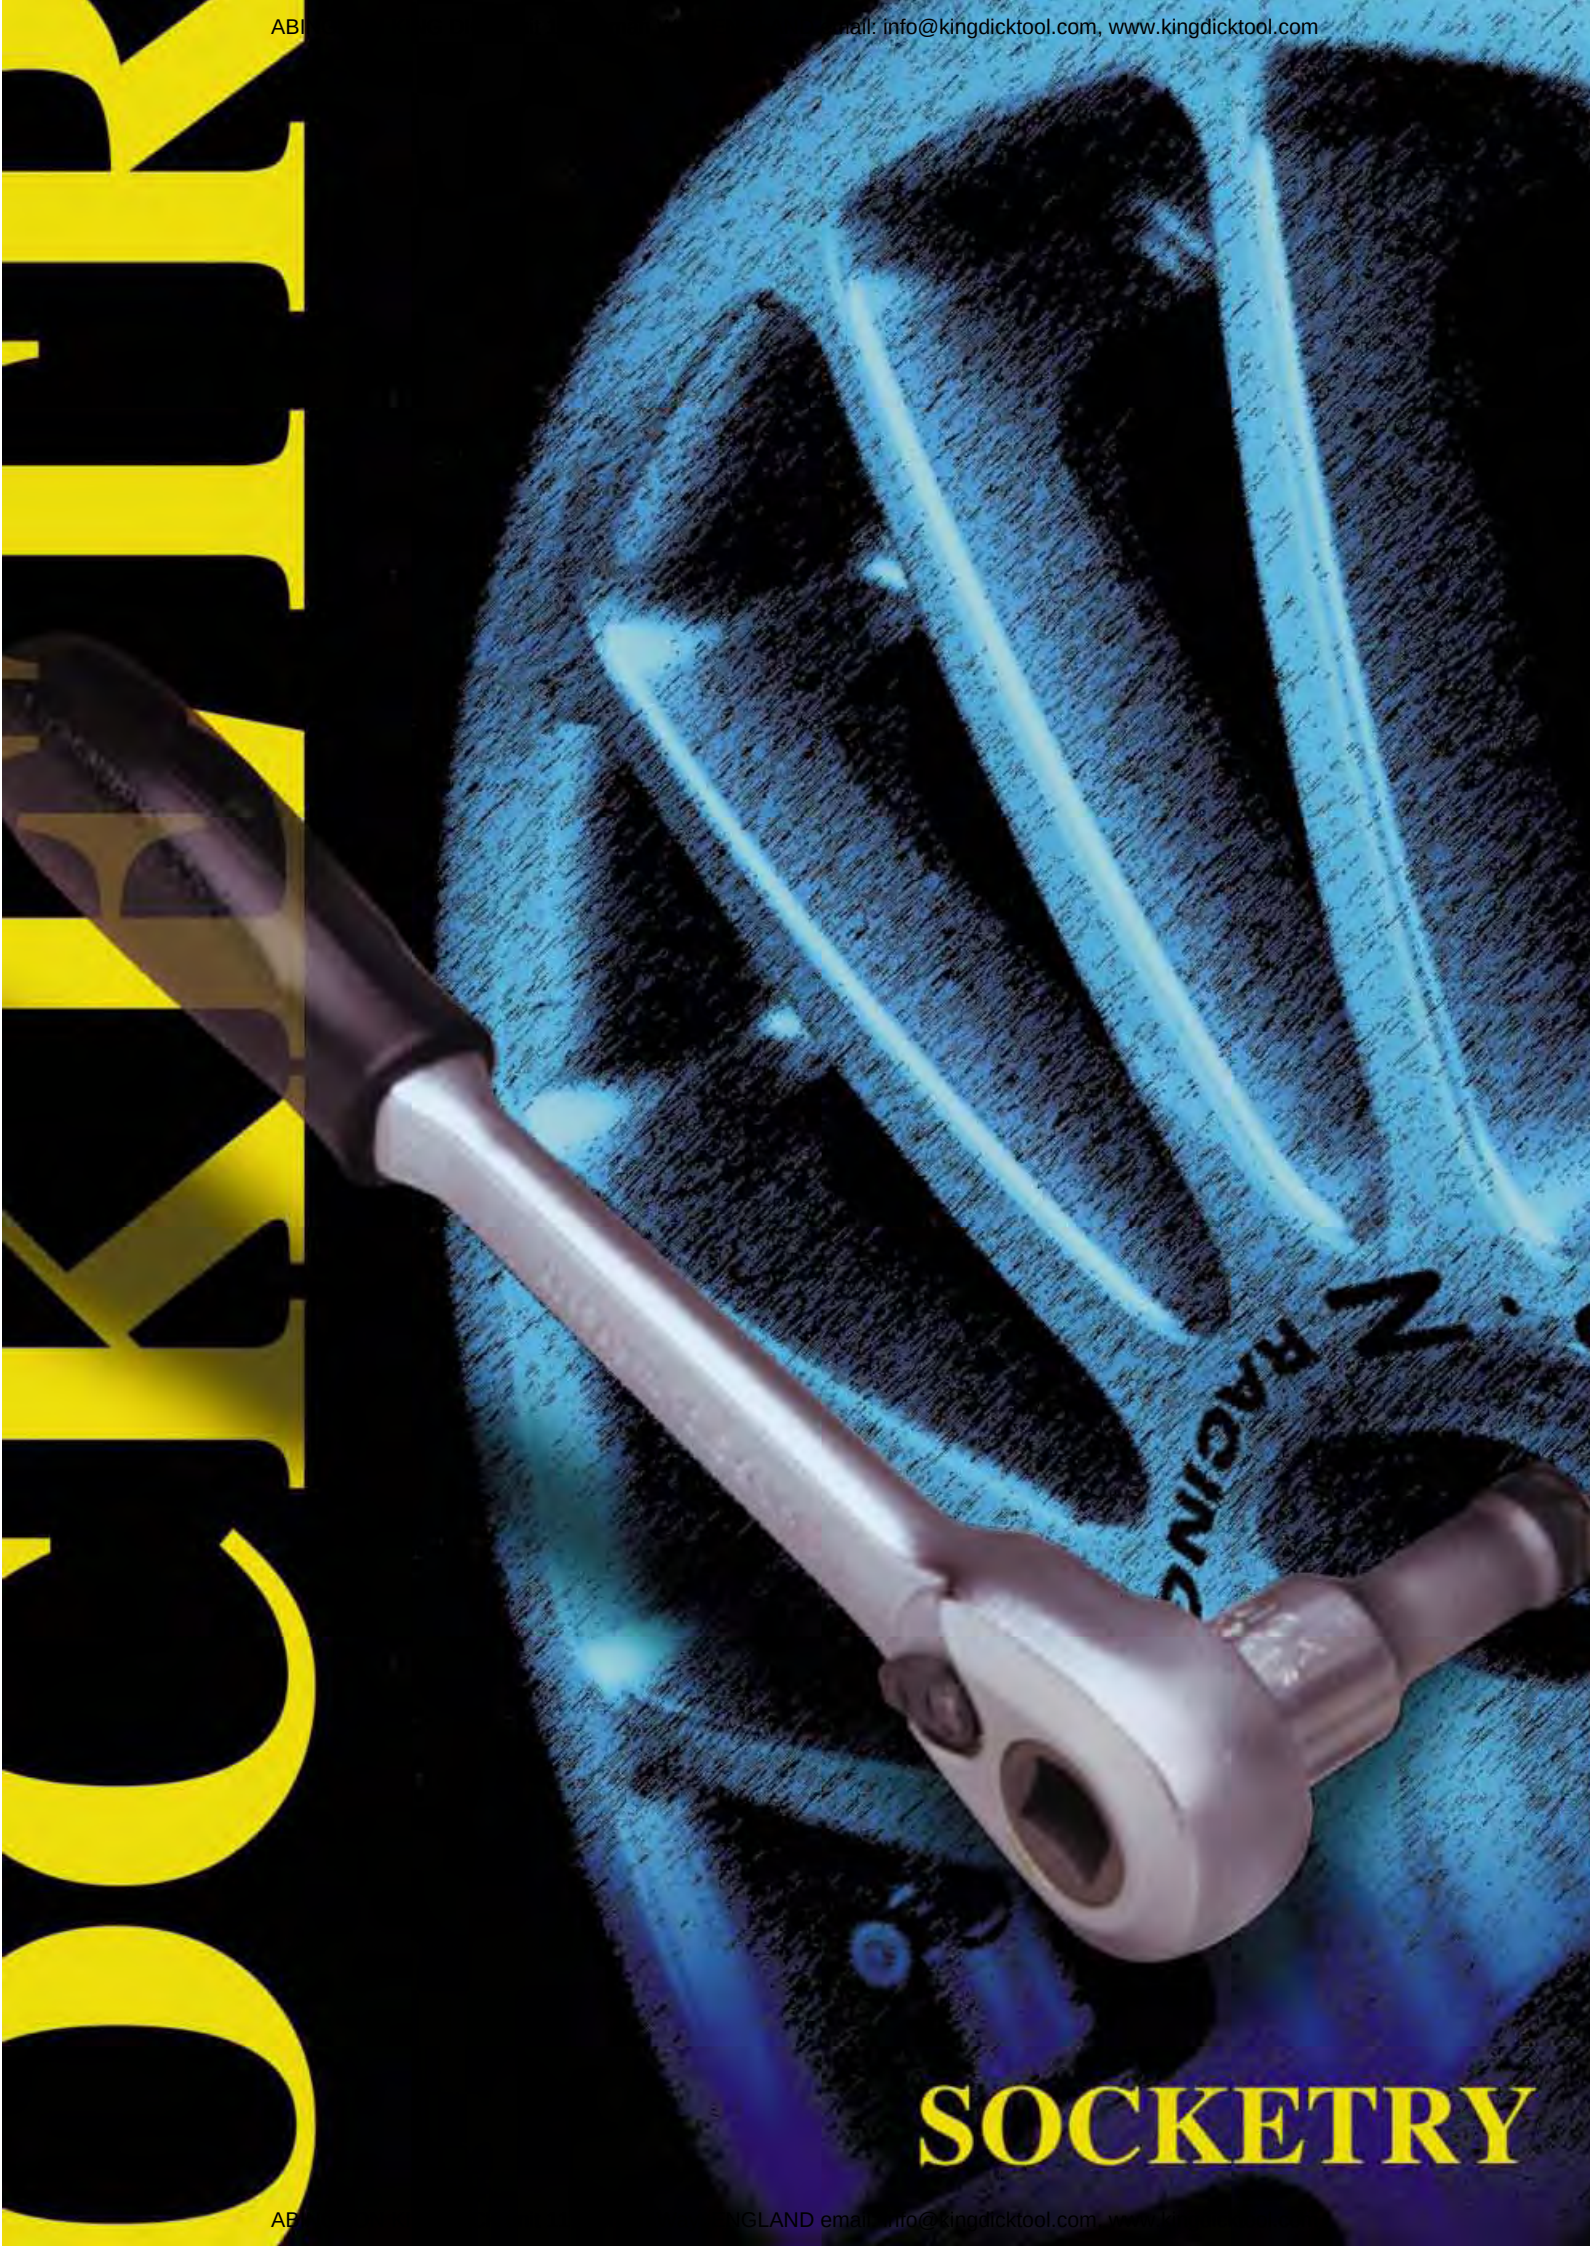


AB GLAND email: info@kingdicktool.com, ww

2

KING DICK TOOLS

# SOCKETRY

All **KING DICK** sockets and accessories are drop forged from high grade materials, to precise tolerances.

Machined to exceptional accuracy within strict controls before precise heat treatment, **KING DICK** sockets offer durable, reliable and lengthy service.

**KING DICK** hand drive sockets and accessories have polished and satin finish nickel-chrome plating for optimum appearance and corrosion resistance.




**KING DICK** socketry products are manufactured to exceed the torque requirement of the relevant DIN standards.

KING DICK

# 1/4” DRIVE 6 POINT



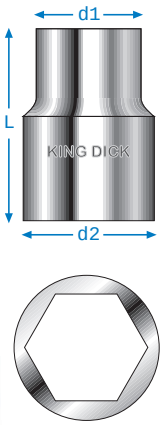


AF

AF

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| ESA 306 | 3/16 | 8 | 11 | 9 |
| ESA 307 | 7/32 | 9 | 11 | 9 |
| ESA 308 | 1/4 | 10 | 11 | 9 |
| ESA 309 | 9/32 | 11 | 11 | 12 |
| ESA 310 | 5/16 | 12 | 12 | 12 |
| ESA 311 | 11/32 | 13 | 13 | 13 |
| ESA 312 | 3/8 | 14 | 14 | 15 |
| ESA 314 | 7/16 | 16 | 16 | 17 |
| ESA 316 | 1/2 | 18 | 18 | 23 |

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| ESM 404 | 4 | 7 | 11 | 9 |
| ESM 4045 | 4.5 | 7 | 11 | 9 |
| ESM 405 | 5 | 8 | 11 | 9 |
| ESM 4055 | 5.5 | 9 | 11 | 9 |
| ESM 406 | 6 | 10 | 11 | 9 |
| ESM 407 | 7 | 11 | 11 | 12 |
| ESM 408 | 8 | 12 | 12 | 12 |
| ESM 409 | 9 | 14 | 14 | 13 |
| ESM 410 | 10 | 14 | 14 | 15 |
| ESM 411 | 11 | 16 | 16 | 17 |
| ESM 412 | 12 | 17 | 17 | 21 |
| ESM 413 | 13 | 18 | 18 | 23 |
| ESM 414 | 14 | 19 | 19 | 26 |

BA

BA

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| ESB 200 | 0 | 16 | 16 | 15 |
| ESB 201 | 1 | 14 | 14 | 13 |
| ESB 202 | 2 | 13 | 13 | 12 |
| ESB 203 | 3 | 11 | 13 | 12 |
| ESB 204 | 4 | 10 | 13 | 9 |
| ESB 205 | 5 | 9 | 13 | 9 |
| ESB 206 | 6 | 8 | 13 | 9 |
| ESB 207 | 7 | 8 | 13 | 9 |
| ESB 208 | 8 | 7 | 13 | 9 |
| ESB 209 | 9 | 7 | 13 | 9 |
| ESB 210 | 10 | 6 | 13 | 8 |

# 1/4” DRIVE DEEP 6 POINT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| EDSM 404 | 4 | 11.9 | 6.8 | 50 | 22 |
| EDSM 4045 | 4.5 | 11.9 | 7.1 | 50 | 22 |
| EDSM 405 | 5 | 11.9 | 8 | 50 | 22 |
| EDSM 4055 | 5.5 | 11.9 | 8.3 | 50 | 22 |
| EDSM 406 | 6 | 11.9 | 9.3 | 50 | 22 |
| EDSM 407 | 7 | 11.9 | 10.5 | 50 | 23 |
| EDSM 408 | 8 | 11.9 | 11.9 | 50 | 25 |
| EDSM 409 | 9 | 13.2 | 13.2 | 50 | 30 |
| EDSM 410 | 10 | 14.6 | 14.6 | 50 | 40 |
| EDSM 411 | 11 | 15.9 | 15.9 | 50 | 56 |
| EDSM 412 | 12 | 17 | 17 | 50 | 53 |
| EDSM 413 | 13 | 18 | 18 | 50 | 70 |
| EDSM 414 | 14 | 19.6 | 19.6 | 50 | 75 |



AF

AF


| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| EDSA 306 | 3/16 | 11.9 | 8 | 50 | 22 |
| EDSA 307 | 7/32 | 11.9 | 8.8 | 50 | 22 |
| EDSA 308 | 1/4 | 11.9 | 9.3 | 50 | 22 |
| EDSA 309 | 9/32 | 11.9 | 10 .5 | 50 | 23 |
| EDSA 310 | 5/16 | 11.9 | 11.9 | 50 | 25 |
| EDSA 312 | 3/8 | 14.6 | 14.8 | 50 | 40 |
| EDSA 314 | 7/16 | 16 | 16 | 50 | 56 |
| EDSA 316 | 1/2 | 18 | 18 | 50 | 70 |
| EDSA 318 | 9/16 | 19.6 | 19.6 | 50 | 75 |

# 1/4” DRIVE ACCESSORIES



| PART No. | Description | L mm | g |
|---|---|---|---|
| SES 2042W | 2” Wobble Extension | 50 | 23 |
| SES 2044W | 4” Wobble Extension | 100 | 44 |
| SES 2046W | 6” Wobble Extension | 150 | 85 |
| SES 2049W | 9” Wobble Extension | 225 | 89 |
| SES 203 | 2” Extension | 50 | 20 |
| SES 204 | 6” Extension | 150 | 58 |
| USS 204 | Universal Joint | 40 | 26 |
| SNS 204 | Jointed Nut Spinner | 145 | 67 |
| SSD 204 | Sliding ‘T’ Bar | 115 | 38 |
| SGH 204 | Spinner Handle | 145 | 59 |
| SFC 204 | Flexi-Extension | 125 | 35 |
| SLS 204 | Cranked Driver | 108 | 50 |
| SAC 204 | Converter 1/4” female, 3/8” male | 25 | 17 |
| RPS 204 | Reversible Ratchet (fine tooth) | 150 | 98 |
| RPS 204RK | Repair Kit | | 20 |
| RPS 804 | Reversible Ratchet (lever) | 150 | 90 |
| RPS 804RK | Repair Kit | | 15 |

# SOCKET TO ’ EM

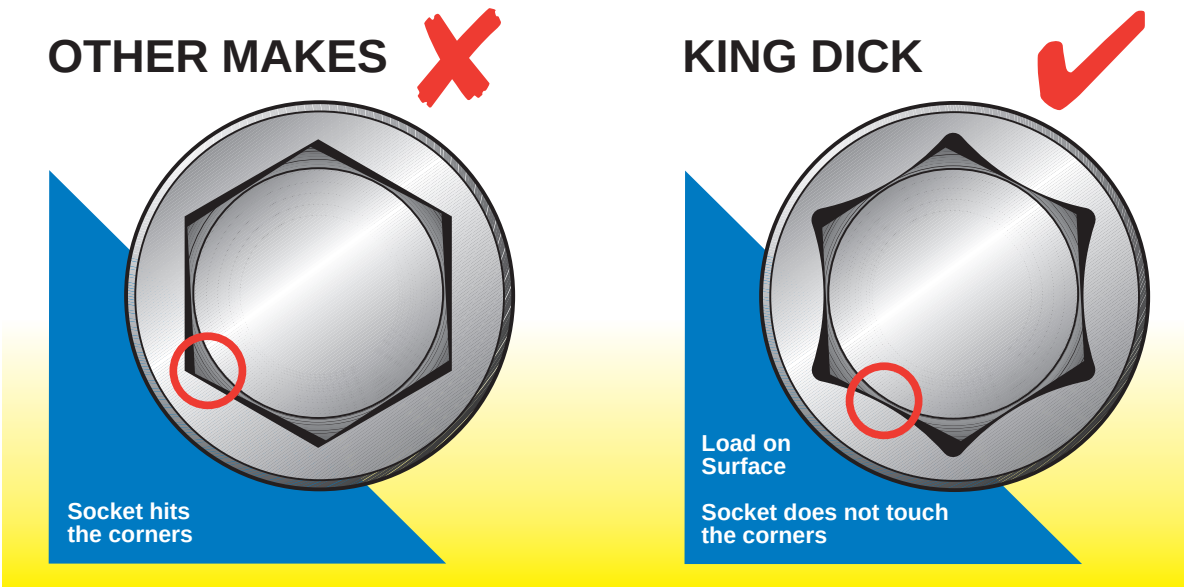




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 1/4” DRIVE SETS

## AF SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 401<br>8 Piece | Cranked Driver<br>3/16, 1/4, 9/32, 5/16, 11/32,<br>3/8, 7/16” AF Hexagon Sockets | 190 |




| PART No. | Contents | g |
|---|---|---|
| TKS 418<br>14 Piece | Ratchet (RPS204), Sliding ‘T’ Bar,<br>Spinner Handle, 6” Extension, U/J.<br>3/16, 7/32, 1/4, 9/32, 5/16, 11/32,<br>3/8, 7/16, 1/2” AF Hexagon Sockets | 925 |

## METRIC SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 402<br>8 Piece | Cranked Driver<br>5, 6, 7, 8, 9, 10, 11mm<br>Hexagon Sockets | 170 |

| PART No. | Contents | g |
|---|---|---|
| TKS 424<br>18 Piece | Ratchet (RPS204), Sliding ‘T’ Bar,<br>Spinner Handle, 2 & 6” Extension, U/J.<br>4, 4.5, 5, 5.5, 6, 7, 8, 9, 10,<br>11, 13, 14mm Hexagon Sockets | 975 |


## BA SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 400<br>8 Piece | Cranked Driver<br>0, 1, 2, 3, 4, 5, 6 BA<br>Hexagon Sockets | 190 |

| PART No. | Contents | g |
|---|---|---|
| TKS 420<br>17 Piece | Ratchet (RPS204), Sliding ‘T’ Bar,<br>Spinner Handle, 2 & 6” Extension, U/J.<br>0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10BA<br>Hexagon Sockets | 950 |

# 3/8” DRIVE






METRIC

M



| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| MSM 206 | 6 | 10 | 18 | 23 |
| MSM 207 | 7 | 11 | 18 | 25 |
| MSM 208 | 8 | 12 | 18 | 23 |
| MSM 209 | 9 | 14 | 18 | 25 |

# 3/8” DRIVE

METRIC

M


| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| MSM 210 | 10 | 15 | 18 | 24 |
| MSM 211 | 11 | 16 | 18 | 24 |
| MSM 212 | 12 | 17 | 18 | 33 |
| MSM 213 | 13 | 19 | 18 | 30 |
| MSM 214 | 14 | 20 | 18 | 26 |
| MSM 215 | 15 | 22 | 19 | 34 |
| MSM 216 | 16 | 23 | 20 | 35 |
| MSM 217 | 17 | 24 | 20 | 44 |
| MSM 218 | 18 | 26 | 22 | 45 |
| MSM 219 | 19 | 26 | 22 | 50 |
| MSM 220 | 20 | 28 | 24 | 58 |
| MSM 221 | 21 | 29 | 25 | 67 |
| MSM 222 | 22 | 30 | 26 | 72 |
| MSM 224 | 24 | 32 | 26 | 80 |

WHIT.

W

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| MSW 202 | 1/8 | 13 | 18 | 25 |
| MSW 203 | 3/16 | 16 | 18 | 25 |
| MSW 204 | 1/4 | 19 | 20 | 30 |
| MSW 205 | 5/16 | 22 | 20 | 32 |
| MSW 206 | 3/8 | 25 | 22 | 50 |
| MSW 207 | 7/16 | 29 | 25 | 66 |
| MSW 208 | 1/2 | 33 | 26 | 74 |



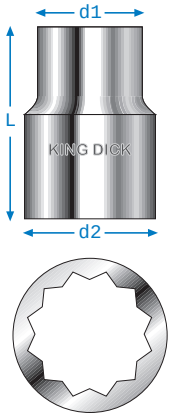


AF

AF

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| MSA 208 | 1/4 | 10 | 18 | 25 |
| MSA 210 | 5/16 | 13 | 18 | 25 |
| MSA 212 | 3/8 | 14 | 18 | 25 |
| MSA 214 | 7/16 | 16 | 18 | 25 |
| MSA 216 | 1/2 | 18 | 21 | 30 |
| MSA 218 | 9/16 | 20 | 21 | 30 |
| MSA 220 | 5/8 | 23 | 21 | 35 |
| MSA 222 | 11/16 | 24 | 21 | 45 |
| MSA 224 | 3/4 | 26 | 23 | 55 |
| MSA 226 | 13/16 | 28 | 24 | 60 |
| MSA 228 | 7/8 | 30 | 26 | 65 |

# 3/8” DRIVE DEEP

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MDSM 206 | 6 | 17 | 9.9 | 63 | 50 |
| MDSM 207 | 7 | 17 | 10.6 | 63 | 50 |
| MDSM 208 | 8 | 17 | 11.8 | 63 | 50 |
| MDSM 209 | 9 | 17 | 13.2 | 63 | 51 |
| MDSM 210 | 10 | 17 | 14.5 | 63 | 52 |
| MDSM 211 | 11 | 17 | 15.7 | 63 | 54 |
| MDSM 212 | 12 | 16 | 17 | 63 | 62 |
| MDSM 213 | 13 | 16.5 | 18 | 63 | 72 |
| MDSM 214 | 14 | 17 | 19.6 | 63 | 78 |
| MDSM 215 | 15 | 18 | 20.9 | 63 | 96 |
| MDSM 216 | 16 | 19 | 22 | 63 | 98 |
| MDSM 217 | 17 | 20 | 23.4 | 63 | 108 |
| MDSM 218 | 18 | 21 | 24.6 | 63 | 120 |
| MDSM 219 | 19 | 23 | 26 | 63 | 125 |
| MDSM 220 | 20 | 24 | 27.1 | 63 | 160 |
| MDSM 221 | 21 | 25 | 28 | 63 | 160 |
| MDSM 222 | 22 | 26 | 29.6 | 63 | 200 |
| MDSM 223 | 23 | 27 | 31.6 | 63 | 210 |
| MDSM 224 | 24 | 28 | 32 | 63 | 210 |



AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MDSA 208 | 1/4 | 17 | 9.9 | 63 | 50 |
| MDSA 210 | 5/16 | 17 | 11.8 | 63 | 50 |
| MDSA 212 | 3/8 | 17 | 14.5 | 63 | 52 |
| MDSA 214 | 7/16 | 17 | 15.7 | 63 | 54 |
| MDSA 216 | 1/2 | 16.5 | 18 | 63 | 72 |
| MDSA 218 | 9/16 | 17 | 19.6 | 63 | 78 |
| MDSA 220 | 5/8 | 19 | 22 | 63 | 98 |
| MDSA 222 | 11/16 | 20 | 23.4 | 63 | 108 |
| MDSA 224 | 3/4 | 23 | 26 | 63 | 125 |
| MDSA 226 | 13/16 | 25 | 28 | 63 | 160 |
| MDSA 228 | 7/8 | 26 | 29.6 | 63 | 200 |
| MDSA 230 | 15/16 | 28 | 32 | 63 | 210 |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 3/8” DRIVE EXTRAS

| PART No. | Description | SIZE | g |
|---|---|---|---|
| ADP 2351 | Adaptor for 5/16 HEXBITS | | |
| MSD 206 | Screwdriver bit | 1x8mm | 50 |

| PART No. | Description | L | g |
|---|---|---|---|
| MSS 210 | 10mm Spark Plug Socket | 58 | 85 |
| MSS 214 | 14mm Spark Plug Socket | 58 | 122 |

# INSERTED HEX & TORX BITS



Fixed two part construction allows hardness suitable to each component for optimum power.

METRIC

M

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| MSHM 203 | 3 | SHORT | 48 | 33 |
| MSHM 204 | 4 | SHORT | 48 | 34 |
| MSHM 205 | 5 | SHORT | 48 | 35 |
| MSHM 206 | 6 | SHORT | 48 | 35 |
| MSHM 207 | 7 | SHORT | 48 | 36 |
| MSHM 208 | 8 | SHORT | 48 | 39 |
| MSHM 210 | 10 | SHORT | 48 | 44 |
| MSHM 203L | 3 | LONG | 126 | 68 |
| MSHM 204L | 4 | LONG | 126 | 68 |
| MSHM 205L | 5 | LONG | 126 | 68 |
| MSHM 206L | 6 | LONG | 126 | 68 |
| MSHM 207L | 7 | LONG | 126 | 68 |
| MSHM 208L | 8 | LONG | 126 | 70 |
| MSHM 210L | 10 | LONG | 126 | 72 |

AF

AF

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| MSHA 205 | 5/32 | SHORT | 48 | 34 |
| MSHA 206 | 3/16 | SHORT | 48 | 35 |
| MSHA 207 | 7/32 | SHORT | 48 | 35 |
| MSHA 208 | 1/4 | SHORT | 48 | 35 |
| MSHA 210 | 5/16 | SHORT | 48 | 39 |
| MSHA 212 | 3/8 | SHORT | 48 | 44 |
| MSHA 205L | 5/32 | LONG | 126 | 68 |
| MSHA 206L | 3/16 | LONG | 126 | 68 |
| MSHA 207L | 7/32 | LONG | 126 | 68 |
| MSHA 208L | 1/4 | LONG | 126 | 68 |
| MSHA 210L | 5/16 | LONG | 126 | 70 |
| MSHA 212L | 3/8 | LONG | 126 | 72 |

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| MST 10 | T10 | SHORT | 48 | 34 |
| MST 15 | T15 | SHORT | 48 | 34 |
| MST 20 | T20 | SHORT | 48 | 34 |
| MST 25 | T25 | SHORT | 48 | 34 |
| MST 27 | T27 | SHORT | 48 | 35 |
| MST 30 | T30 | SHORT | 48 | 35 |
| MST 40 | T40 | SHORT | 48 | 35 |
| MST 45 | T45 | SHORT | 48 | 38 |
| MST 50 | T50 | SHORT | 48 | 38 |
| MST 10L | T10 | LONG | 126 | 68 |
| MST 15L | T15 | LONG | 126 | 68 |
| MST 20L | T20 | LONG | 126 | 68 |
| MST 25L | T25 | LONG | 126 | 68 |
| MST 27L | T27 | LONG | 126 | 68 |
| MST 30L | T30 | LONG | 126 | 68 |
| MST 40L | T40 | LONG | 126 | 68 |
| MST 45L | T45 | LONG | 126 | 70 |
| MST 50L | T50 | LONG | 126 | 72 |

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| MST 10A | T10 | SHORT | 48 | 34 |
| MST 15A | T15 | SHORT | 48 | 34 |
| MST 20A | T20 | SHORT | 48 | 34 |
| MST 25A | T25 | SHORT | 48 | 34 |
| MST 27A | T27 | SHORT | 48 | 35 |
| MST 30A | T30 | SHORT | 48 | 35 |
| MST 40A | T40 | SHORT | 48 | 35 |
| MST 45A | T45 | SHORT | 48 | 38 |
| MST 50A | T50 | SHORT | 48 | 38 |
| MST 10AL | T10 | LONG | 126 | 68 |
| MST 15AL | T15 | LONG | 126 | 68 |
| MST 20AL | T20 | LONG | 126 | 68 |
| MST 25AL | T25 | LONG | 126 | 68 |
| MST 27AL | T27 | LONG | 126 | 68 |
| MST 30AL | T30 | LONG | 126 | 68 |
| MST 40AL | T40 | LONG | 126 | 68 |
| MST 45AL | T45 | LONG | 126 | 70 |
| MST 50AL | T50 | LONG | 126 | 72 |

# 3/8” DRIVE ACCESSORIES

| PART No. | Description | L mm | g |
|---|---|---|---|
| SES 2063W | 3” Wobble Extension | 75 | 60 |
| SES 2065W | 5” Wobble Extension | 125 | 102 |
| SES 2069W | 9” Wobble Extension | 225 | 170 |
| SES 20610W | 10” Wobble Extension | 250 | 184 |
| SES 20612W | 12” Wobble Extension | 300 | 221 |
| SES 206M | 5” Extension | 125 | 104 |
| SES 206L | 10” Extension | 250 | 204 |
| USS 206 | Universal Joint | 58 | 76 |
| SNS 207 | Jointed Nut Spinner | 225 | 208 |
| SSD 207 | Sliding ‘T’ Bar | 200 | 176 |
| SBS 205 | Speed Brace | 300 | 262 |
| SAC 206 | Converter 3/8” female, 1/2” male | 36 | 55 |
| RPS 206 | Reversible Ratchet (fine tooth) | 200 | 265 |
| RPS 206RK | Repair Kit | | 60 |
| RPS 806 | Reversible Ratchet (lever) | 200 | 303 |
| RPS 806RK | Repair Kit | | 60 |



# RATCHET TECH


A choice of 32 or 60 tooth mechanisms.

Positively locating, durable reverse actions.


Strong, reliable and precise movement.

User friendly polypropylene handles on 1/4, 3/8 & 1/2” drive (plus 3/4 drive PTD212)

FINE TOOTH RATCHET

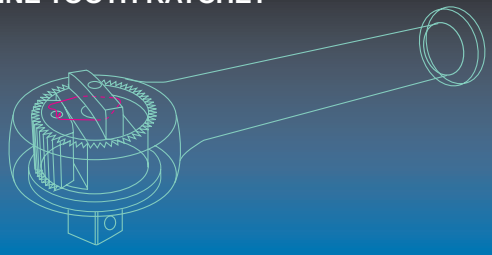

REVERSIBLE RATCHET

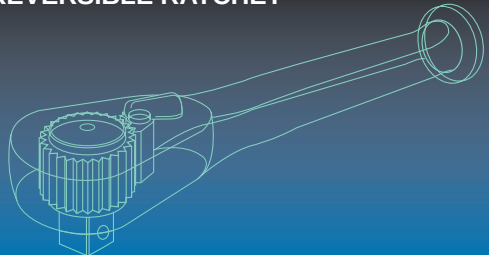

# 3/8” DRIVE SETS

## METRIC SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 560<br>9 Piece | Ratchet (RPS206), 5” Extension<br>10, 11, 13, 14, 17,<br>19, 22mm Sockets | 1,215 |



| PART No. | Contents | g |
|---|---|---|
| TKS 679<br>15 Piece | Ratchet (RPS 206), Sliding ‘T’ Bar,<br>5 & 10” Extensions, U/J, S.Plug Socket<br>9, 10, 11, 13, 14, 15, 16,<br>17, 19mm Sockets | 2,015 |

| PART No. | Contents | g |
|---|---|---|
| TKS 682<br>24 Piece | Ratchet (RPS 206), Sliding ‘T’ Bar,<br>Speedbrace, 5 & 10” Extensions, U/J,<br>Screwdriver Bit, 6, 7, 8, 9, 10, 11, 12,<br>13, 14, 15, 16, 17, 18, 19, 20, 21 &<br>22mm Sockets | 2,565 |

## AF SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 555<br>9 Piece | Ratchet (RPS206), 5” Extension,<br>7/16, 1/2, 9/16, 5/8, 11/16,<br>3/4, 7/8” AF Sockets | 1,225 |

## WHITWORTH SET

| PART No. | Contents | g |
|---|---|---|
| TKS 552<br>9 Piece | Ratchet (RPS206), 5” Extension,<br>1/8, 3/16, 1/4, 5/16, 3/8,<br>7/16, 1/2” Whit. Sockets | 1,000 |

| PART No. | Contents | g |
|---|---|---|
| TKS 678<br>15 Piece | Ratchet (RPS206), Sliding ‘T’ Bar,<br>5 & 10” Extension, U/J, S.Plug Socket<br>1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8,<br>11/16, 3/4” AF Sockets | 2,000 |

# 1/2” DRIVE 12 POINT










WHIT.

**W**




| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| HSW 202 | 1/8 | 13 | 23 | 56 |
| HSW 203 | 3/16 | 17 | 23 | 60 |
| HSW 204 | 1/4 | 20 | 23 | 61 |
| HSW 205 | 5/16 | 22 | 23 | 66 |
| HSW 206 | 3/8 | 26 | 24 | 72 |
| HSW 207 | 7/16 | 29 | 26 | 90 |
| HSW 208 | 1/2 | 32 | 29 | 104 |
| HSW 209 | 9/16 | 36 | 30 | 143 |
| HSW 210 | 5/8 | 39 | 30 | 152 |
| HSW 211 | 11/16 | 41 | 30 | 167 |
| HSW 212 | 3/4 | 45 | 33 | 192 |

# 1/2” DRIVE 12 POINT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| HSM 208 | 8 | 12 | 23 | 56 |
| HSM 209 | 9 | 14 | 23 | 56 |
| HSM 210 | 10 | 16 | 23 | 60 |
| HSM 211 | 11 | 17 | 24 | 60 |
| HSM 212 | 12 | 18 | 24 | 61 |
| HSM 213 | 13 | 19 | 24 | 61 |
| HSM 214 | 14 | 21 | 24 | 63 |
| HSM 215 | 15 | 23 | 24 | 66 |
| HSM 216 | 16 | 23 | 24 | 66 |
| HSM 217 | 17 | 24 | 24 | 64 |
| HSM 218 | 18 | 26 | 24 | 72 |
| HSM 219 | 19 | 27 | 28 | 78 |
| HSM 220 | 20 | 28 | 28 | 90 |
| HSM 221 | 21 | 29 | 28 | 90 |
| HSM 222 | 22 | 31 | 28 | 98 |
| HSM 223 | 23 | 32 | 28 | 104 |
| HSM 224 | 24 | 33 | 29 | 116 |
| HSM 225 | 25 | 34 | 30 | 121 |
| HSM 226 | 26 | 36 | 30 | 143 |
| HSM 227 | 27 | 37 | 30 | 143 |
| HSM 228 | 28 | 38 | 30 | 152 |
| HSM 230 | 30 | 41 | 30 | 167 |
| HSM 232 | 32 | 43 | 32 | 192 |






AF

AF

| PART No. | SIZE | d1 mm | d2 mm | g |
|---|---|---|---|---|
| HSA 210 | 5/16 | 13.2 | 21.8 | 47 |
| HSA 212 | 3/8 | 15 | 23 | 56 |
| HSA 214 | 7/16 | 18 | 23 | 60 |
| HSA 216 | 1/2 | 19 | 23 | 61 |
| HSA 218 | 9/16 | 21 | 23 | 63 |
| HSA 220 | 5/8 | 23 | 23 | 66 |
| HSA 222 | 11/16 | 25 | 23 | 64 |
| HSA 224 | 3/4 | 27 | 27 | 78 |
| HSA 226 | 13/16 | 29 | 27 | 90 |
| HSA 228 | 7/8 | 31 | 27 | 96 |
| HSA 230 | 15/16 | 33 | 27 | 116 |
| HSA 232 | 1 | 35 | 28 | 121 |
| HSA 234 | $1^{1}/_{16}$ | 37 | 30 | 143 |
| HSA 236 | $1^{1}/_{8}$ | 38 | 30 | 152 |
| HSA 238 | $1^{3}/_{16}$ | 41 | 30 | 163 |
| HSA 240 | $1^{1}/_{4}$ | 43 | 32 | 182 |

# 1/2” DRIVE DEEP 12 POINT



AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDSA 212 | 3/8 | 22 | 15 | 77 | 96 |
| HDSA 214 | 7/16 | 22 | 16.3 | 77 | 101 |
| HDSA 216 | 1/2 | 22 | 18.8 | 77 | 109 |
| HDSA 218 | 9/16 | 22 | 20.4 | 77 | 112 |
| HDSA 220 | 5/8 | 21.5 | 22.9 | 77 | 128 |
| HDSA 222 | 11/16 | 22 | 24 | 77 | 130 |
| HDSA 224 | 3/4 | 23 | 26 | 77 | 154 |
| HDSA 226 | 13/16 | 25 | 28 | 77 | 176 |
| HDSA 228 | 7/8 | 26 | 30 | 77 | 195 |
| HDSA 230 | 15/16 | 28 | 32 | 77 | 231 |
| HDSA 232 | 1 | 30 | 34 | 77 | 250 |
| HDSA 234 | $1^{1}/_{16}$ | 30 | 36 | 77 | 282 |
| HDSA 236 | $1^{1}/_{8}$ | 32 | 38 | 77 | 320 |
| HDSA 238 | $1^{3}/_{16}$ | 34 | 40 | 77 | 336 |
| HDSA 240 | $1^{1}/_{4}$ | 36 | 42 | 77 | 355 |

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDSM 208 | 8 | 22 | 13.2 | 77 | 88 |
| HDSM 209 | 9 | 22 | 13.9 | 77 | 91 |
| HDSM 210 | 10 | 22 | 15 | 77 | 96 |
| HDSM 211 | 11 | 22 | 16.3 | 77 | 101 |
| HDSM 212 | 12 | 22 | 17.6 | 77 | 107 |
| HDSM 213 | 13 | 22 | 18.8 | 77 | 109 |
| HDSM 214 | 14 | 22 | 20.4 | 77 | 112 |
| HDSM 215 | 15 | 20.7 | 21.6 | 77 | 128 |
| HDSM 216 | 16 | 21.5 | 22.9 | 77 | 128 |
| HDSM 217 | 17 | 22 | 24 | 77 | 130 |
| HDSM 218 | 18 | 23 | 25.4 | 77 | 162 |
| HDSM 219 | 19 | 23 | 26 | 77 | 160 |
| HDSM 220 | 20 | 24 | 27.9 | 77 | 180 |
| HDSM 221 | 21 | 25 | 28 | 77 | 180 |
| HDSM 222 | 22 | 26 | 30 | 77 | 195 |
| HDSM 223 | 23 | 27 | 31.6 | 77 | 235 |
| HDSM 224 | 24 | 28 | 32 | 77 | 235 |
| HDSM 225 | 25 | 30 | 34 | 77 | 250 |
| HDSM 226 | 26 | 30 | 35.5 | 77 | 290 |
| HDSM 227 | 27 | 30 | 36 | 77 | 285 |
| HDSM 228 | 28 | 32 | 37.9 | 77 | 300 |
| HDSM 230 | 30 | 34 | 40 | 77 | 336 |
| HDSM 232 | 32 | 36 | 42 | 77 | 355 |




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com


# 1/2” DRIVE 6 POINT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HSM 2086 | 8 | 21.8 | 13.2 | 38 | 47 |
| HSM 2096 | 9 | 21.8 | 13.9 | 38 | 47 |
| HSM 2106 | 10 | 21.8 | 15 | 38 | 49 |
| HSM 2116 | 11 | 21.8 | 16.3 | 38 | 50 |
| HSM 2126 | 12 | 21.8 | 17.6 | 38 | 50 |
| HSM 2136 | 13 | 21.8 | 18.8 | 38 | 51 |
| HSM 2146 | 14 | 21.8 | 20.4 | 38 | 53 |
| HSM 2156 | 15 | 20.7 | 21.6 | 38 | 54 |
| HSM 2166 | 16 | 21.5 | 22.9 | 38 | 61 |
| HSM 2176 | 17 | 22 | 24 | 38 | 68 |
| HSM 2186 | 18 | 23 | 25.4 | 38 | 85 |
| HSM 2196 | 19 | 23 | 26 | 38 | 73 |
| HSM 2206 | 20 | 24 | 27.9 | 38 | 86 |
| HSM 2216 | 21 | 25 | 28 | 38 | 82 |
| HSM 2226 | 22 | 26 | 30 | 40 | 106 |
| HSM 2236 | 23 | 27 | 31.6 | 40 | 125 |
| HSM 2246 | 24 | 28 | 32 | 42 | 125 |
| HSM 2256 | 25 | 30 | 34 | 42 | 150 |
| HSM 2266 | 26 | 30 | 35.4 | 42 | 170 |
| HSM 2276 | 27 | 30 | 36 | 43 | 170 |
| HSM 2286 | 28 | 32 | 37.9 | 43 | 193 |
| HSM 2306 | 30 | 34 | 40 | 46 | 225 |
| HSM 2326 | 32 | 36 | 42 | 46 | 255 |






AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HSA 2106 | 5/16 | 21.8 | 13.2 | 38 | 47 |
| HSA 2126 | 3/8 | 21.8 | 15 | 38 | 49 |
| HSA 2146 | 7/16 | 21.8 | 16.3 | 38 | 50 |
| HSA 2166 | 1/2 | 21.8 | 18.8 | 38 | 51 |
| HSA 2186 | 9/16 | 21.8 | 20.4 | 38 | 53 |
| HSA 2206 | 5/8 | 21.5 | 22.9 | 38 | 61 |
| HSA 2226 | 11/16 | 22 | 24 | 38 | 68 |
| HSA 2246 | 3/4 | 23 | 26 | 38 | 73 |
| HSA 2266 | 13/16 | 25 | 28 | 38 | 82 |
| HSA 2286 | 7/8 | 26 | 30 | 40 | 106 |
| HSA 2306 | 15/16 | 28 | 32 | 42 | 121 |
| HSA 2326 | 1 | 30 | 34 | 42 | 150 |
| HSA 2346 | $1^{1}/_{16}$ | 30 | 36 | 43 | 168 |
| HSA 2366 | $1^{1}/_{8}$ | 32 | 38 | 43 | 205 |
| HSA 2386 | $1^{3}/_{16}$ | 34 | 40 | 46 | 225 |
| HSA 2406 | $1^{1}/_{4}$ | 36 | 42 | 46 | 255 |

# 1/2” DRIVE EXTRAS

| PART No. | Description | L | g |
|---|---|---|---|
| HSS 210 | 10mm Spark Plug Socket | 58 | 100 |
| HSS 214 | 14mm Spark Plug Socket | 67 | 145 |

| PART No. | Description | SIZE | g |
|---|---|---|---|
| ADP 3351 | Adaptor for 5/16 HEXBITS | | |

# CAUTION




Never use a hand drive socket with a power tool



Always use an impact socket designed for the job

# INSERTED HEX & TORX BITS



Fixed two part construction allows hardness suitable to each component for optimum power.

AF

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| HSHA 207 | 7/32 | SHORT | 55 | 64 |
| HSHA 208 | 1/4 | SHORT | 55 | 64 |
| HSHA 210 | 5/16 | SHORT | 55 | 68 |
| HSHA 212 | 3/8 | SHORT | 55 | 70 |
| HSHA 214 | 7/16 | SHORT | 55 | 70 |
| HSHA 216 | 1/2 | SHORT | 55 | 80 |
| HSHA 207L | 7/32 | LONG | 138 | 107 |
| HSHA 208L | 1/4 | LONG | 138 | 107 |
| HSHA 210L | 5/16 | LONG | 138 | 109 |
| HSHA 212L | 3/8 | LONG | 138 | 133 |
| HSHA 214L | 7/16 | LONG | 138 | 206 |
| HSHA 216L | 1/2 | LONG | 138 | 206 |


METRIC

M

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| HSHM 204 | 4 | SHORT | 55 | 64 |
| HSHM 205 | 5 | SHORT | 55 | 64 |
| HSHM 206 | 6 | SHORT | 55 | 64 |
| HSHM 207 | 7 | SHORT | 55 | 66 |
| HSHM 208 | 8 | SHORT | 55 | 68 |
| HSHM 210 | 10 | SHORT | 55 | 70 |
| HSHM 212 | 12 | SHORT | 55 | 78 |
| HSHM 214 | 14 | SHORT | 55 | 82 |
| HSHM 217 | 17 | SHORT | 55 | 88 |
| HSHM 219 | 19 | SHORT | 55 | 96 |
| HSHM 204L | 4 | LONG | 138 | 106 |
| HSHM 205L | 5 | LONG | 138 | 106 |
| HSHM 206L | 6 | LONG | 138 | 107 |
| HSHM 207L | 7 | LONG | 138 | 108 |
| HSHM 208L | 8 | LONG | 138 | 109 |
| HSHM 210L | 10 | LONG | 138 | 133 |
| HSHM 212L | 12 | LONG | 138 | 206 |
| HSHM 214L | 14 | LONG | 138 | 212 |
| HSHM 217L | 17 | LONG | 138 | 274 |
| HSHM 219L | 19 | LONG | 138 | 300 |

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| HST 40 | T40 | SHORT | 55 | 64 |
| HST 45 | T45 | SHORT | 55 | 66 |
| HST 50 | T50 | SHORT | 55 | 68 |
| HST 55 | T55 | SHORT | 55 | 70 |
| HST 60 | T60 | SHORT | 55 | 80 |
| HST 40L | T40 | LONG | 138 | 108 |
| HST 45L | T45 | LONG | 138 | 108 |
| HST 50L | T50 | LONG | 138 | 108 |
| HST 55L | T55 | LONG | 138 | 130 |
| HST 60L | T60 | LONG | 138 | 135 |

| PART No. | SIZE | | L mm | g |
|---|---|---|---|---|
| HST 40A | T40 | SHORT | 55 | 64 |
| HST 45A | T45 | SHORT | 55 | 66 |
| HST 50A | T50 | SHORT | 55 | 68 |
| HST 55A | T55 | SHORT | 55 | 70 |
| HST 60A | T60 | SHORT | 55 | 80 |
| HST 40AL | T40 | LONG | 138 | 108 |
| HST 45AL | T45 | LONG | 138 | 108 |
| HST 50AL | T50 | LONG | 138 | 108 |
| HST 55AL | T55 | LONG | 138 | 130 |
| HST 60AL | T60 | LONG | 1386 | 135 |

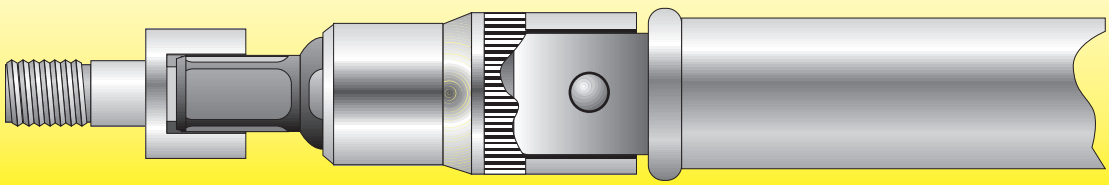

# 1/2” DRIVE ACCESSORIES









| PART No. | Description | L mm | g |
|---|---|---|---|
| SES 2082W | 2” Wobble Extension | 50 | 77 |
| SES 2083W | 3” Wobble Extension | 75 | 115 |
| SES 2085W | 5” Wobble Extension | 125 | 193 |
| SES 20810W | 10” Wobble Extension | 250 | 353 |
| SES 20815W | 15” Wobble Extension | 375 | 577 |
| SES 20820W | 20” Wobble Extension | 500 | 770 |
| SES 208S | 3” Extension | 75 | 117 |
| SES 208M | 5” Extension | 125 | 179 |
| SES 208L | 10” Extension | 250 | 352 |
| SES 20812 | 12” Extension | 300 | 510 |
| SES 208X | 18” Extension | 450 | 800 |
| USS 208 | Universal Joint | 73 | 156 |
| SNS 208 | Jointed Nut Spinner | 265 | 427 |
| SNS 208X | 18” Jointed Nut Spinner | 460 | 830 |
| SSD 210 | Sliding ‘T’ Bar | 300 | 386 |
| SLS 208 | ‘L’ Driver | 190 | 235 |
| SBS 208 | Speed Brace | 375 | 556 |
| SAC 208 | Converter 1/2” female, 3/4” male | 44 | 116 |
| SAC 207 | Converter 1/2” female, 3/8” male | 38 | 59 |
| SRS 912 | Stud Remover 5/16-3/4” | | 425 |
| RPS 408 | Ratchet (fine tooth) | 250 | 434 |
| RPS 408RK | Repair Kit | | 70 |
| RPS 808 | Ratchet (lever) | 250 | 535 |
| RPS 808RK | Repair Kit | | 70 |
| RPS 408FH | Flexi-Head Ratchet (fine tooth) | 285 | 550 |

# 1/2” DRIVE SETS

## AF SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 616<br>7 Piece | Cranked Driver<br>7/16, 1/2, 9/16, 5/8, 3/4,<br>7/8 AF Sockets | 655 |

| PART No. | Contents | g |
|---|---|---|
| TKS 816<br>8 Piece | Ratchet, 5” Extension,<br>7/16, 1/2, 9/16, 5/8, 3/4,<br>7/8 AF Sockets | 1,725 |

| PART No. | Contents | g |
|---|---|---|
| TKS 882<br>22 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner,<br>5 & 10” Extension, U/J, Speed Brace,<br>Spark Plug Socket.<br>7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16,<br>7/8, 15/16, 1, $1^{1}/_{16}$, $1^{1}/_{8}$, $1^{3}/_{16}$,$1^{1}/_{4}$”<br>AF Sockets. | 5,920 |

## WHITWORTH SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 606<br>7 Piece | Cranked Driver.<br>3/16, 1/4, 5/16, 3/8, 7/16,<br>1/2” Whit Sockets. | 690 |

| PART No. | Contents | g |
|---|---|---|
| TKS 806<br>8 Piece | Ratchet, 5” Extension.<br>3/16, 1/4, 5/16, 3/8, 7/16,<br>1/2” Whit. Sockets. | 1,640 |

| PART No. | Contents | g |
|---|---|---|
| TKS 881<br>19 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner,<br>5 & 10” Extension, U/J, Speed Brace,<br>Spark Plug Socket.<br>1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2,<br>9/16, 5/8, 11/16, 3/4” Whit. Sockets. | 5,635 |

## METRIC SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 636<br>7 Piece | Cranked Driver<br>8, 10, 13, 17, 19,<br>22mm Sockets | 640 |

| PART No. | Contents | g |
|---|---|---|
| TKS 820<br>8 Piece | Ratchet, 5” Extension,<br>8, 10, 13, 17, 19,<br>22mm Sockets | 1,720 |

| PART No. | Contents | g |
|---|---|---|
| TKS 880<br>28 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner,<br>5 & 10” Extension, U/J, Speed Brace,<br>Spark Plug Socket.<br>10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20,<br>21, 22, 23, 24, 26, 27, 28, 30, 32mm<br>Sockets. | 6,315 |

| PART No. | Contents | g |
|---|---|---|
| TKS 883<br>19 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner,<br>5 & 10” Extension, U/J, Speed Brace,<br>Spark Plug Socket.<br>8, 10, 11, 13, 17, 19, 22, 24, 27,<br>30, 32mm Sockets. | 5,455 |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 1/2” DRIVE SETS

## METRIC & AF SET

| PART No. | Contents | g |
|---|---|---|
| TKS 865<br>33 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner, 5 & 10” Extension, U/J, Speed Brace, Spark Plug Socket, 8,10, 11, 13, 17, 19, 22, 24, 27, 30, 32mm Sockets. 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, $1^{1}/_{16}$, $1^{1}/_{8}$, $1^{3}/_{16}$, $1^{1}/_{4}$, AF Sockets. | 6,935 |

## METRIC, AF & WHIT. SET

| PART No. | Contents | g |
|---|---|---|
| TKS 884<br>55 Piece | Ratchet, ‘T’ Bar, Jointed Nut Spinner, 3,5,10 & 18” Extension, U/J, Speed Brace, Stud Remover, Spark Plug Socket. 11,12,13,14,15,16,17,18,19,20,21,22,23,24,26,27,28,30,32mm 7/16,1/2,9/16,5/8,11/16,3/4,13/16,7/8,15/16,1,$1^{1}/_{16}$,$1^{1}/_{8}$,$1^{3}/_{16}$,$1^{1}/_{4}$AF 1/8,3/16,1/4,5/16,3/8,7/16,1/2,9/16,5/8,11/16,3/4 Whit Sockets. | 11,505 |

# 3/4” DRIVE 12 POINT





METRIC

**M**









| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LSM 222 | 22 | 30 | 34 | 52 | 195 |
| LSM 224 | 24 | 33 | 34 | 52 | 204 |
| LSM 227 | 27 | 38 | 35 | 54 | 229 |
| LSM 230 | 30 | 42 | 36 | 56 | 281 |
| LSM 232 | 32 | 44 | 37 | 56 | 304 |
| LSM 233 | 33 | 44 | 36 | 56 | 320 |
| HSM 236 | 36 | 50 | 36 | 64 | 430 |
| LSM 238 | 38 | 51 | 36 | 64 | 473 |
| LSM 241 | 41 | 56 | 37 | 64 | 502 |
| LSM 242 | 42 | 58 | 39 | 64 | 562 |
| LSM 246 | 46 | 62 | 40 | 64 | 599 |
| LSM 250 | 50 | 67 | 40 | 64 | 716 |
| LSM 255 | 55 | 74 | 40 | 64 | 806 |

WHIT.

**W**



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LSW 208 | 1/2 | 32 | 35 | 52 | 195 |
| LSW 209 | 9/16 | 37 | 34 | 54 | 210 |
| LSW 210 | 5/8 | 40 | 36 | 54 | 256 |
| LSW 211 | 11/16 | 43 | 36 | 54 | 281 |
| LSW 212 | 3/4 | 44 | 36 | 54 | 320 |
| LSW 213 | 13/16 | 49 | 36 | 62 | 430 |
| LSW 214 | 7/8 | 52 | 36 | 62 | 473 |
| LSW 215 | 15/16 | 58 | 38 | 63 | 502 |
| LSW 216 | 1 | 58 | 38 | 65 | 562 |
| LSW 218 | $1^{1}/_{8}$ | 63 | 39 | 65 | 658 |
| LSW 220 | $1^{1}/_{4}$ | 69 | 39 | 65 | 725 |

AF

**AF**



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LSA 228 | 7/8 | 32 | 35 | 51 | 195 |
| LSA 230 | 15/16 | 33 | 35 | 51 | 204 |
| LSA 232 | 1 | 36 | 35 | 51 | 210 |
| LSA 234 | $1^{1}/_{16}$ | 38 | 35 | 53 | 229 |
| LSA 236 | $1^{1}/_{8}$ | 40 | 35 | 53 | 256 |
| LSA 238 | $1^{3}/_{16}$ | 41 | 35 | 55 | 281 |
| LSA 240 | $1^{1}/_{4}$ | 44 | 36 | 55 | 304 |
| LSA 242 | $1^{5}/_{16}$ | 46 | 36 | 65 | 320 |
| LSA 244 | $1^{3}/_{8}$ | 47 | 36 | 65 | 430 |
| LSA 246 | $1^{7}/_{16}$ | 48 | 36 | 65 | 440 |
| LSA 248 | $1^{1}/_{2}$ | 52 | 36 | 65 | 473 |
| LSA 250 | $1^{9}/_{16}$ | 56 | 38 | 65 | 502 |
| LSA 252 | $1^{5}/_{8}$ | 58 | 38 | 65 | 510 |
| LSA 254 | $1^{11}/_{16}$ | 58 | 38 | 65 | 562 |
| LSA 256 | $1^{3}/_{4}$ | 60 | 39 | 65 | 599 |
| LSA 258 | $1^{13}/_{16}$ | 62 | 40 | 65 | 649 |
| LSA 260 | $1^{7}/_{8}$ | 65 | 40 | 65 | 658 |
| LSA 264 | 2 | 67 | 40 | 65 | 716 |

# 3/4” DRIVE ACCESSORIES



| PART No. | Description | L mm | g |
|---|---|---|---|
| SES 212S | 4” Extension | 100 | 440 |
| SES 212M | 8” Extension | 200 | 675 |
| SES 212L | 16” Extension | 400 | 1,350 |
| USS 212 | Universal Joint | 104 | 530 |
| SNS 212 | Jointed Nut Spinner | 430 | 1,708 |
| SSD 212 | Sliding ‘T’ Bar | 430 | 1,260 |
| SAC 212 | Converter 3/4” female, 1/2” male | 58 | 180 |
| SAC 216 | Converter 3/4” female, 1” male | 60 | 360 |
| RHS 812 | Reversible Ratchet (fine tooth) | 542 | 2,570 |
| RHS 812RK | Repair Kit | | 285 |
| PTD 212 | Ratchet (push through) | 500 | 1,500 |
| PTD 212RK | Repair Kit | | 280 |

# 3/4” DRIVE SETS



## AF SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 992 20 Piece | Ratchet (PTD212), Sliding ‘T’ Bar, U/J, Jointed Nut Spinner, 4, 8 & 16” Extension. 7/8, 15/16, $1^{1}/_{16}$, $1^{1}/_{8}$, $1^{1}/_{4}$, $1^{5}/_{16}$, $1^{7}/_{16}$, $1^{1}/_{2}$, $1^{5}/_{8}$, $1^{11}/_{16}$, $1^{13}/_{16}$, $1^{7}/_{8}$, 2” AF Sockets. | 15,290 |

## METRIC SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 990 17 Piece | Ratchet (PTD212), Sliding ‘T’ Bar, U/J, Jointed Nut Spinner, 4,8 & 16” Extension. 22, 24, 27, 30, 32, 36, 41, 46, 50, 55mm Sockets. | 14,055 |

## WHITWORTH SET


| PART No. | Contents | g |
|---|---|---|
| TKS 991 18 Piece | Ratchet (PTD212), Sliding ‘T’ Bar, U/J, Jointed Nut Spinner, 4,8 & 16” Extension. 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, $1^{1}/_{8}$, $1^{1}/_{4}$” Whit. Sockets. | 14,550 |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 1” DRIVE 12 POINT

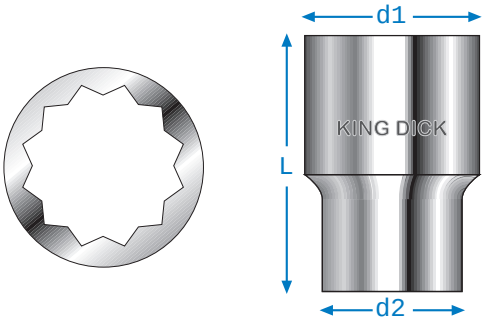


METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GSM 241 | 41 | 60 | 51 | 70 | 615 |
| GSM 246 | 46 | 68 | 54 | 79 | 720 |
| GSM 250 | 50 | 75 | 56 | 86 | 950 |
| GSM 255 | 55 | 81 | 57 | 92 | 1,030 |
| GSM 260 | 60 | 86 | 60 | 99 | 1,325 |
| GSM 265 | 65 | 91 | 60 | 101 | 1,540 |
| GSM 270 | 70 | 97 | 64 | 114 | 1,775 |
| GSM 275 | 75 | 103 | 67 | 121 | 2,200 |
| GSM 280 | 80 | 111 | 67 | 121 | 2,630 |

AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GSA 246 | 1 7/16 | 56 | 51 | 60 | 525 |
| GSA 248 | 1 1/2 | 57 | 51 | 64 | 595 |
| GSA 252 | 1 5/8 | 60 | 51 | 70 | 615 |
| GSA 258 | 1 13/16 | 68 | 54 | 79 | 720 |
| GSA 260 | 1 7/8 | 70 | 54 | 83 | 865 |
| GSA 264 | 2 | 75 | 56 | 86 | 950 |
| GSA 272 | 2 1/4 | 83 | 57 | 95 | 1,030 |
| GSA 276 | 2 3/8 | 86 | 60 | 99 | 1,325 |
| GSA 284 | 2 5/8 | 94 | 64 | 108 | 1,540 |
| GSA 288 | 2 3/4 | 97 | 64 | 114 | 1,775 |
| GSA 294 | 2 15/16 | 103 | 67 | 121 | 2,200 |
| GSA 299 | 3 1/8 | 110 | 67 | 121 | 2,630 |

# 1” DRIVE ACCESSORIES

| PART No. | Description | L mm | g |
|---|---|---|---|
| SES 216S | 8” Extension | 210 | 1,040 |
| SES 216L | 16” Extension | 420 | 1,850 |
| SSD 216 | Sliding ‘T’ Bar | 500 | 2,480 |
| SAC 214 | Converter 1” female, 3/4” male | 80 | 465 |
| RHS 816 | Reversible Ratchet (fine tooth) | 610 | 3,370 |
| RHS 816RK | Repair Kit | | 390 |



# 1” DRIVE SETS

## AF SETS


| PART No. | Contents | g |
|---|---|---|
| TKS 1022<br>17 Piece | Ratchet (RHS816), Sliding ‘T’ Bar, 8 & 16”<br>Extension, Converter 1”sq.d. x 3/4”plug.<br>$1^{7}/_{16}$, $1^{1}/_{2}$, $1^{5}/_{8}$, $1^{13}/_{16}$, $1^{7}/_{8}$, 2, $2^{1}/_{4}$, $2^{3}/_{8}$,<br>$2^{5}/_{8}$, $2^{3}/_{4}$, $2^{15}/_{16}$, $3^{1}/_{8}$, AF Sockets. | 40,210 |

## METRIC SETS

| PART No. | Contents | g |
|---|---|---|
| TKS 1013<br>14 Piece | Ratchet (RHS816), Sliding ‘T’ Bar, 8 & 16”<br>Extension, Converter 1”sq.d. x 3/4” plug.<br>41, 46, 50, 55, 60, 65, 70,<br>75, 80mm Sockets. | 48,000 |

# 3/8” DRIVE IMPACT



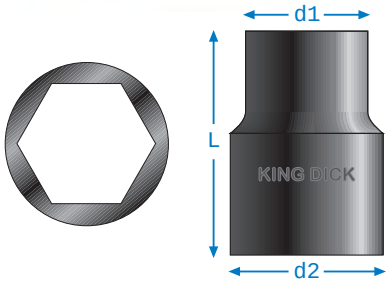


Vast choice from 3/8 to 1” drive.
Available in standard and deep lengths, and extra-thin wall for accessibility.
Designed for use with ring & pin retention, (rings & pins available separately).
Made from EN24 steel for strength, power and reliability.
Distinctive black finish for use with any power driver.

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MPM 207 | 7 | 12.5 | 19 | 34 | 20 |
| MPM 208 | 8 | 14 | 19 | 34 | 20 |
| MPM 209 | 9 | 15 | 19 | 34 | 20 |
| MPM 210 | 10 | 16.5 | 19 | 34 | 30 |
| MPM 211 | 11 | 17.5 | 19 | 34 | 30 |
| MPM 212 | 12 | 19 | 19 | 34 | 30 |
| MPM 213 | 13 | 20 | 22 | 34 | 30 |
| MPM 214 | 14 | 21.5 | 22 | 34 | 40 |
| MPM 215 | 15 | 22.5 | 22 | 34 | 40 |
| MPM 216 | 16 | 24 | 22 | 34 | 50 |
| MPM 217 | 17 | 25 | 22 | 34 | 60 |
| MPM 218 | 18 | 26.5 | 22 | 34 | 70 |
| MPM 219 | 19 | 27.5 | 22 | 34 | 90 |
| MPM 220 | 20 | 27.5 | 22 | 34 | 90 |

AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MPA 208 | 1/4 | 12 | 19 | 34 | 20 |
| MPA 210 | 5/16 | 14 | 19 | 34 | 20 |
| MPA 212 | 3/8 | 16 | 19 | 34 | 20 |
| MPA 214 | 7/16 | 17.5 | 19 | 34 | 30 |
| MPA 216 | 1/2 | 20 | 22 | 34 | 40 |
| MPA 218 | 9/16 | 21.5 | 22 | 34 | 40 |
| MPA 220 | 5/8 | 24 | 22 | 34 | 50 |
| MPA 222 | 11/16 | 26 | 22 | 34 | 60 |
| MPA 224 | 3/4 | 27.5 | 22 | 34 | 70 |
| MPA 226 | 13/16 | 27.5 | 22 | 34 | 80 |
| MPA 228 | 7/8 | 25 | 30 | 34 | 80 |
| MPA 230 | 15/16 | 25 | 30 | 34 | 90 |

WHIT.

W

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MPW 202 | 1/8 | 15 | 19 | 34 | 25 |
| MPW 203 | 3/16 | 19 | 19 | 34 | 25 |
| MPW 204 | 1/4 | 20 | 22 | 34 | 35 |
| MPW 205 | 5/16 | 22.5 | 22 | 34 | 35 |
| MPW 206 | 3/8 | 26.5 | 22 | 34 | 35 |
| MPW 207 | 7/16 | 26.5 | 22 | 34 | 100 |
| MPW 208 | 1/2 | 26.5 | 22 | 34 | 110 |

# 3/8” DRIVE DEEP IMPACT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MDPM 207 | 7 | 12.5 | 19 | 57 | 54 |
| MDPM 208 | 8 | 14 | 19 | 57 | 54 |
| MDPM 209 | 9 | 15 | 19 | 57 | 54 |
| MDPM 210 | 10 | 16.5 | 19 | 57 | 54 |
| MDPM 211 | 11 | 17.5 | 19 | 57 | 59 |
| MDPM 212 | 12 | 19 | 19 | 57 | 59 |
| MDPM 213 | 13 | 20 | 22 | 57 | 64 |
| MDPM 214 | 14 | 21.5 | 22 | 57 | 72 |
| MDPM 215 | 15 | 22.5 | 22 | 57 | 95 |
| MDPM 216 | 16 | 24 | 22 | 57 | 110 |
| MDPM 217 | 17 | 25 | 22 | 57 | 115 |
| MDPM 218 | 18 | 26.5 | 22 | 57 | 122 |
| MDPM 219 | 19 | 27.5 | 22 | 57 | 130 |
| MDPM 220 | 20 | 27.5 | 22 | 57 | 135 |









AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MDPA 208 | 1/4 | 12 | 19 | 57 | 54 |
| MDPA 210 | 5/16 | 14 | 19 | 57 | 54 |
| MDPA 212 | 3/8 | 16 | 19 | 57 | 63 |
| MDPA 214 | 7/16 | 17.5 | 19 | 57 | 68 |
| MDPA 216 | 1/2 | 20 | 22 | 57 | 82 |
| MDPA 218 | 9/16 | 21.5 | 22 | 57 | 91 |
| MDPA 220 | 5/8 | 24 | 22 | 57 | 131 |
| MDPA 222 | 11/16 | 26 | 22 | 57 | 150 |
| MDPA 224 | 3/4 | 27.5 | 22 | 57 | 158 |
| MDPA 226 | 13/16 | 27.5 | 22 | 57 | 158 |
| MDPA 228 | 7/8 | 25 | 30 | 57 | 165 |
| MDPA 230 | 15/16 | 25 | 30 | 57 | 165 |

WHIT.

W



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| MDPW 202 | 1/8 | 15 | 19 | 57 | 33 |
| MDPW 203 | 3/16 | 19 | 19 | 57 | 33 |
| MDPW 204 | 1/4 | 20 | 22 | 57 | 42 |
| MDPW 205 | 5/16 | 22.5 | 22 | 57 | 42 |
| MDPW 206 | 3/8 | 26.5 | 22 | 57 | 52 |


| | | | |
|---|---|---|---|
| UPS 206 | Universal Joint | 65 | 120 |

# 1/2” DRIVE IMPACT



WHIT.

W




| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HPW 202 | 1/8 | 15 | 25 | 38 | 70 |
| HPW 203 | 3/16 | 19 | 25 | 38 | 70 |
| HPW 204 | 1/4 | 20.5 | 25 | 38 | 82 |
| HPW 205 | 5/16 | 24 | 25 | 38 | 90 |
| HPW 206 | 3/8 | 28 | 30 | 38 | 120 |
| HPW 207 | 7/16 | 31.5 | 30 | 35 | 135 |
| HPW 208 | 1/2 | 34 | 30 | 35 | 150 |
| HPW 209 | 9/16 | 38 | 35 | 40 | 190 |
| HPW 210 | 5/8 | 39 | 35 | 40 | 210 |
| HPW 211 | 11/16 | 42.5 | 35 | 40 | 220 |
| HPW 212 | 3/4 | 45 | 35 | 40 | 260 |

# 1/2” DRIVE IMPACT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HPM 208 | 8 | 15 | 25 | 38 | 50 |
| HPM 209 | 9 | 15 | 25 | 38 | 50 |
| HPM 210 | 10 | 15 | 25 | 38 | 60 |
| HPM 211 | 11 | 17.5 | 25 | 38 | 60 |
| HPM 212 | 12 | 19 | 25 | 38 | 70 |
| HPM 213 | 13 | 20.5 | 25 | 38 | 70 |
| HPM 214 | 14 | 22 | 25 | 38 | 100 |
| HPM 215 | 15 | 24 | 25 | 38 | 100 |
| HPM 216 | 16 | 24.5 | 25 | 38 | 120 |
| HPM 217 | 17 | 26 | 30 | 38 | 120 |
| HPM 218 | 18 | 28 | 30 | 38 | 120 |
| HPM 219 | 19 | 29 | 30 | 38 | 120 |
| HPM 220 | 20 | 30.5 | 30 | 38 | 130 |
| HPM 221 | 21 | 31.5 | 30 | 38 | 130 |
| HPM 222 | 22 | 32.5 | 30 | 38 | 130 |
| HPM 223 | 23 | 34 | 35 | 38 | 150 |
| HPM 224 | 24 | 35 | 35 | 40 | 150 |
| HPM 225 | 25 | 36.5 | 35 | 40 | 150 |
| HPM 226 | 26 | 38 | 35 | 40 | 150 |
| HPM 227 | 27 | 39 | 35 | 40 | 160 |
| HPM 228 | 28 | 40.5 | 35 | 40 | 160 |
| HPM 229 | 29 | 41.5 | 35 | 40 | 160 |
| HPM 230 | 30 | 42.5 | 35 | 40 | 190 |
| HPM 232 | 32 | 45 | 35 | 40 | 240 |
| HPM 236 | 36 | 52 | 32 | 55 | 310 |

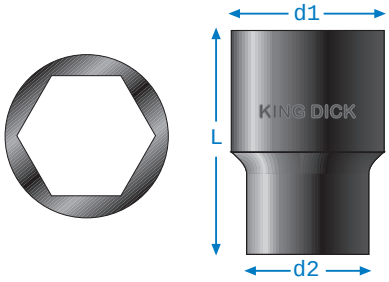


AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HPA 212 | 3/8 | 15 | 25 | 38 | 60 |
| HPA 214 | 7/16 | 17.5 | 25 | 38 | 60 |
| HPA 216 | 1/2 | 20.5 | 25 | 38 | 70 |
| HPA 218 | 9/16 | 22 | 25 | 38 | 100 |
| HPA 220 | 5/8 | 24.5 | 25 | 38 | 120 |
| HPA 222 | 11/16 | 27 | 30 | 38 | 120 |
| HPA 224 | 3/4 | 27 | 30 | 38 | 120 |
| HPA 226 | 13/16 | 31 | 30 | 38 | 120 |
| HPA 228 | 7/8 | 32.5 | 30 | 38 | 130 |
| HPA 230 | 15/16 | 35 | 35 | 40 | 150 |
| HPA 232 | 1 | 37 | 35 | 40 | 160 |
| HPA 234 | $1^{1}/_{16}$ | 39 | 35 | 45 | 160 |
| HPA 236 | $1^{1}/_{8}$ | 41.5 | 35 | 45 | 200 |
| HPA 238 | $1^{3}/_{16}$ | 42.5 | 35 | 45 | 200 |
| HPA 240 | $1^{1}/_{4}$ | 45 | 35 | 50 | 240 |
| HPA 242 | $1^{5}/_{16}$ | 48 | 35 | 50 | 260 |

# 1/2” DRIVE DEEP IMPACT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDPM 208 | 8 | 15 | 25 | 82 | 200 |
| HDPM 209 | 9 | 15 | 25 | 82 | 210 |
| HDPM 210 | 10 | 15 | 25 | 82 | 220 |
| HDPM 211 | 11 | 17.5 | 25 | 82 | 240 |
| HDPM 212 | 12 | 19 | 25 | 82 | 240 |
| HDPM 213 | 13 | 20.5 | 25 | 82 | 240 |
| HDPM 214 | 14 | 22 | 25 | 82 | 240 |
| HDPM 215 | 15 | 24 | 25 | 82 | 340 |
| HDPM 216 | 16 | 24.5 | 25 | 82 | 340 |
| HDPM 217 | 17 | 26 | 30 | 82 | 340 |
| HDPM 218 | 18 | 28 | 30 | 82 | 340 |
| HDPM 219 | 19 | 29 | 30 | 82 | 340 |
| HDPM 220 | 20 | 30.5 | 30 | 82 | 380 |
| HDPM 221 | 21 | 31.5 | 30 | 82 | 380 |
| HDPM 222 | 22 | 32.5 | 30 | 82 | 380 |
| HDPM 223 | 23 | 34 | 35 | 82 | 440 |
| HDPM 224 | 24 | 35 | 35 | 82 | 440 |
| HDPM 225 | 25 | 36.5 | 35 | 82 | 440 |
| HDPM 226 | 26 | 38 | 35 | 82 | 440 |



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDPM 227 | 27 | 39 | 35 | 82 | 460 |
| HDPM 228 | 28 | 40.5 | 35 | 82 | 460 |
| HDPM 229 | 29 | 41.5 | 35 | 82 | 460 |
| HDPM 230 | 30 | 42.5 | 35 | 82 | 460 |
| HDPM 232 | 32 | 45 | 35 | 82 | 600 |
| HDPM 236 | 36 | 52 | 32 | 82 | 680 |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 1/2” DRIVE DEEP IMPACT

AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDPA 212 | 3/8 | 15 | 25 | 82 | 240 |
| HDPA 214 | 7/16 | 17.5 | 25 | 82 | 240 |
| HDPA 216 | 1/2 | 20.5 | 25 | 82 | 240 |
| HDPA 218 | 9/16 | 22 | 25 | 82 | 240 |
| HDPA 220 | 5/8 | 24.5 | 25 | 82 | 340 |
| HDPA 222 | 11/16 | 27 | 30 | 82 | 340 |
| HDPA 224 | 3/4 | 27 | 30 | 82 | 340 |
| HDPA 226 | 13/16 | 31 | 30 | 82 | 380 |
| HDPA 228 | 7/8 | 32.5 | 30 | 82 | 380 |
| HDPA 230 | 15/16 | 35 | 35 | 82 | 440 |
| HDPA 232 | 1 | 37 | 35 | 82 | 440 |
| HDPA 234 | $1^{1}/_{16}$ | 39 | 35 | 82 | 460 |
| HDPA 236 | $1^{1}/_{8}$ | 41.5 | 35 | 82 | 460 |
| HDPA 238 | $1^{3}/_{16}$ | 42.5 | 35 | 82 | 470 |
| HDPA 240 | $1^{1}/_{4}$ | 45 | 35 | 82 | 600 |
| HDPA 242 | $1^{5}/_{16}$ | 48 | 35 | 82 | 600 |

WHIT.

W


| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| HDPW 202 | 1/8 | 15 | 25 | 82 | 210 |
| HDPW 203 | 3/16 | 19 | 25 | 82 | 240 |
| HDPW 204 | 1/4 | 20.5 | 25 | 82 | 280 |
| HDPW 205 | 5/16 | 24 | 25 | 82 | 340 |
| HDPW 206 | 3/8 | 28 | 30 | 82 | 340 |
| HDPW 207 | 7/16 | 31.5 | 30 | 82 | 390 |
| HDPW 208 | 1/2 | 34 | 30 | 82 | 440 |
| HDPW 209 | 9/16 | 38 | 35 | 82 | 440 |
| HDPW 210 | 5/8 | 39 | 35 | 82 | 480 |
| HDPW 211 | 11/16 | 42.5 | 35 | 82 | 620 |
| HDPW 212 | 3/4 | 45 | 35 | 82 | 650 |


# 1/2” DRIVE IMPACT ACCESSORIES

| | | |
|---|---|---|
| PES 208S | 3” Impact Extension | 150 |
| PES 208M | 5” Impact Extension | 240 |
| PES 208L | 10” Impact Extension | 450 |

| | | | |
|---|---|---|---|
| UPS 208 | Universal Joint | 72 | 170 |
| PAC 207 | Converter 1/2” female, 3/8” male | 40 | 70 |

# HOW WE MAKE AN IMPACT

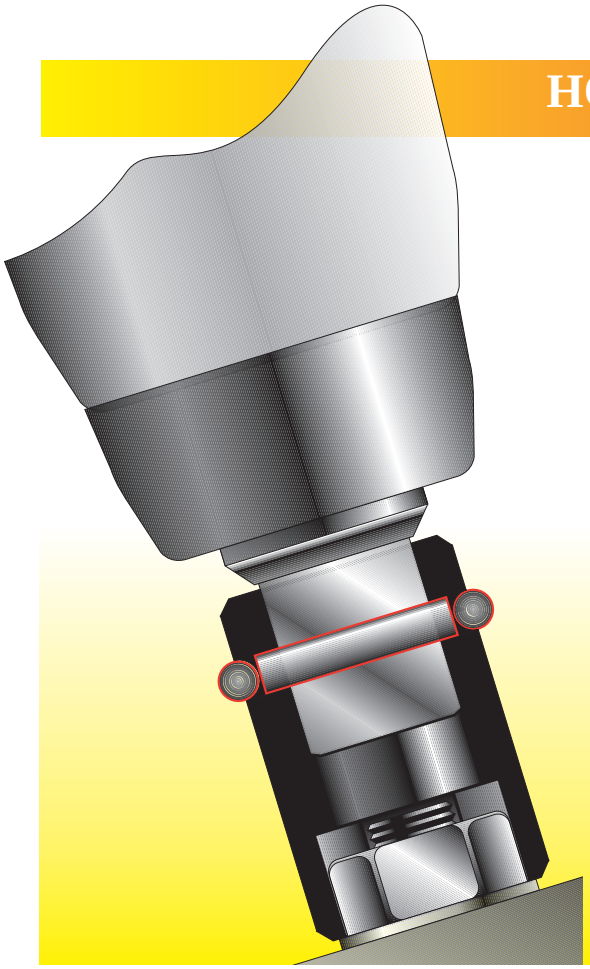


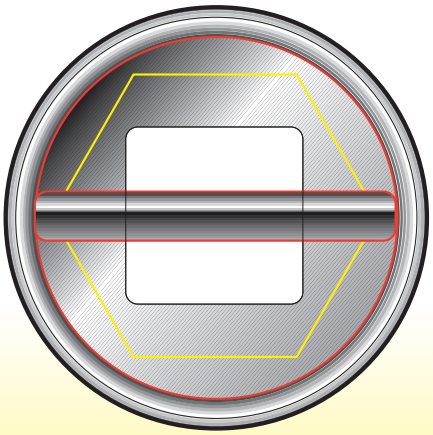

**KING DICK IMPACT SOCKETS** feature a through hole and recess to accept a retaining pin and ring. When in place these prevent the accidental removal of the socket and ensures safer working.


# 3/4” DRIVE IMPACT



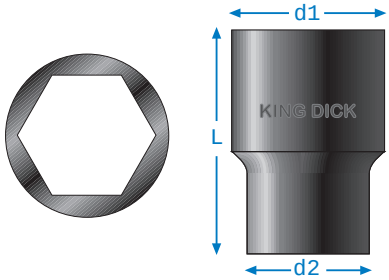


WHIT.

W



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LPW 207 | 7/16 | 35 | 38 | 50 | 330 |
| LPW 208 | 1/2 | 38 | 44 | 50 | 330 |
| LPW 209 | 9/16 | 40.5 | 44 | 54 | 350 |
| LPW 210 | 5/8 | 42.5 | 44 | 54 | 350 |
| LPW 211 | 11/16 | 46 | 44 | 54 | 380 |
| LPW 212 | 3/4 | 49.5 | 44 | 57 | 380 |
| LPW 213 | 13/16 | 53 | 44 | 58 | 440 |
| LPW 214 | 7/8 | 57 | 44 | 58 | 470 |
| LPW 215 | 15/16 | 61 | 44 | 58 | 490 |
| LPW 216 | 1 | 63 | 44 | 63 | 600 |
| LPW 218 | 1 1/8 | 68 | 44 | 63 | 780 |
| LPW 220 | 1 1/4 | 73 | 44 | 70 | 850 |

AF

AF



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LPA 218 | 9/16 | 30 | 38 | 50 | 280 |
| LPA 220 | 5/8 | 30 | 38 | 50 | 280 |
| LPA 222 | 11/16 | 30 | 38 | 50 | 300 |
| LPA 224 | 3/4 | 32 | 38 | 50 | 300 |
| LPA 226 | 13/16 | 35 | 38 | 50 | 360 |
| LPA 228 | 7/8 | 35 | 38 | 50 | 370 |
| LPA 230 | 15/16 | 39 | 44 | 50 | 370 |
| LPA 232 | 1 | 40.5 | 44 | 54 | 370 |
| LPA 234 | 1 1/16 | 42.5 | 44 | 54 | 370 |
| LPA 236 | 1 1/8 | 44 | 44 | 54 | 370 |
| LPA 238 | 1 3/16 | 46 | 44 | 54 | 380 |
| LPA 240 | 1 1/4 | 48 | 44 | 57 | 420 |
| LPA 242 | 1 5/16 | 52 | 44 | 57 | 440 |
| LPA 244 | 1 3/8 | 53 | 44 | 57 | 440 |
| LPA 246 | 1 7/16 | 56 | 44 | 57 | 460 |
| LPA 248 | 1 1/2 | 57 | 44 | 58 | 490 |
| LPA 250 | 1 9/16 | 59.5 | 44 | 58 | 490 |
| LPA 252 | 1 5/8 | 61 | 44 | 58 | 500 |
| LPA 254 | 1 11/16 | 63 | 44 | 63 | 500 |
| LPA 256 | 1 3/4 | 65 | 44 | 63 | 500 |
| LPA 258 | 1 13/16 | 68 | 44 | 63 | 790 |
| LPA 260 | 1 7/8 | 69 | 44 | 70 | 940 |
| LPA 264 | 2 | 73 | 44 | 70 | 1006 |
| LPA 266 | 2 1/16 | 77 | 44 | 70 | 1050 |
| LPA 268 | 2 1/8 | 78 | 44 | 70 | 1110 |
| LPA 270 | 2 3/16 | 80 | 44 | 70 | 1200 |
| LPA 272 | 2 1/4 | 82 | 44 | 70 | 1200 |

METRIC

M



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LPM 218 | 18 | 30 | 38 | 50 | 300 |
| LPM 219 | 19 | 32 | 38 | 50 | 300 |
| LPM 220 | 20 | 32 | 38 | 50 | 300 |
| LPM 221 | 21 | 35 | 38 | 50 | 300 |
| LPM 222 | 22 | 35 | 38 | 50 | 330 |
| LPM 223 | 23 | 38 | 44 | 50 | 330 |
| LPM 224 | 24 | 38 | 44 | 50 | 360 |
| LPM 225 | 25 | 40 | 44 | 54 | 360 |
| LPM 226 | 26 | 40.5 | 44 | 54 | 370 |
| LPM 227 | 27 | 42.5 | 44 | 54 | 370 |
| LPM 228 | 28 | 44 | 44 | 54 | 380 |
| LPM 229 | 29 | 44 | 44 | 54 | 380 |
| LPM 230 | 30 | 46 | 44 | 54 | 380 |
| LPM 231 | 31 | 46 | 44 | 57 | 380 |
| LPM 232 | 32 | 48 | 44 | 57 | 420 |
| LPM 233 | 33 | 49.5 | 44 | 57 | 440 |
| LPM 234 | 34 | 52 | 44 | 57 | 440 |
| LPM 235 | 35 | 53 | 44 | 57 | 460 |
| LPM 236 | 36 | 54 | 44 | 57 | 460 |
| LPM 237 | 37 | 56 | 44 | 58 | 470 |
| LPM 238 | 38 | 57 | 44 | 58 | 490 |
| LPM 241 | 41 | 61 | 44 | 58 | 500 |
| LPM 246 | 46 | 68 | 44 | 63 | 790 |
| LPM 248 | 48 | 69 | 44 | 70 | 950 |
| LPM 250 | 50 | 72 | 44 | 70 | 950 |
| LPM 255 | 55 | 79 | 44 | 70 | 1210 |
| LPM 260 | 60 | 86 | 44 | 70 | 1370 |
| LPM 265 | 65 | 92 | 44 | 70 | 1450 |




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# 3/4” DRIVE DEEP IMPACT





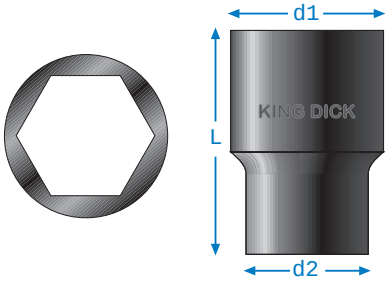


METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LDPM 218 | 18 | 30 | 38 | 100 | 570 |
| LDPM 219 | 19 | 32 | 38 | 100 | 600 |
| LDPM 220 | 20 | 32 | 38 | 100 | 680 |
| LDPM 221 | 21 | 35 | 38 | 100 | 680 |
| LDPM 222 | 22 | 35 | 38 | 100 | 720 |
| LDPM 223 | 23 | 38 | 44 | 100 | 750 |
| LDPM 224 | 24 | 38 | 44 | 100 | 750 |
| LDPM 225 | 25 | 40 | 44 | 100 | 750 |
| LDPM 226 | 26 | 40.5 | 44 | 100 | 750 |
| LDPM 227 | 27 | 42.5 | 44 | 100 | 750 |
| LDPM 228 | 28 | 44 | 44 | 100 | 730 |
| LDPM 229 | 29 | 44 | 44 | 100 | 810 |
| LDPM 230 | 30 | 46 | 44 | 100 | 810 |
| LDPM 231 | 31 | 46 | 44 | 100 | 810 |
| LDPM 232 | 32 | 48 | 44 | 100 | 810 |
| LDPM 233 | 33 | 49.5 | 44 | 100 | 790 |
| LDPM 234 | 34 | 52 | 44 | 100 | 790 |
| LDPM 235 | 35 | 53 | 44 | 100 | 790 |
| LDPM 236 | 36 | 54 | 44 | 100 | 790 |
| LDPM 237 | 37 | 56 | 44 | 100 | 840 |
| LDPM 238 | 38 | 57 | 44 | 100 | 840 |
| LDPM 241 | 41 | 61 | 44 | 100 | 910 |
| LDPM 246 | 46 | 68 | 44 | 100 | 1180 |
| LDPM 248 | 48 | 69 | 44 | 100 | 1180 |
| LDPM 250 | 50 | 72 | 44 | 100 | 1230 |
| LDPM 255 | 55 | 79 | 44 | 100 | 1310 |
| LDPM 260 | 60 | 86 | 44 | 100 | 1460 |
| LDPM 265 | 65 | 92 | 44 | 100 | 1580 |

AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LDPA 218 | 9/16 | 30 | 38 | 100 | 557 |
| LDPA 220 | 5/8 | 30 | 38 | 100 | 567 |
| LDPA 222 | 11/16 | 30 | 38 | 100 | 570 |
| LDPA 224 | 3/4 | 32 | 38 | 100 | 570 |
| LDPA 226 | 13/16 | 35 | 38 | 100 | 600 |
| LDPA 228 | 7/8 | 35 | 38 | 100 | 750 |
| LDPA 230 | 15/16 | 39 | 44 | 100 | 750 |
| LDPA 232 | 1 | 40.5 | 44 | 100 | 750 |
| LDPA 234 | $1^{1}/_{16}$ | 42.5 | 44 | 100 | 750 |
| LDPA 236 | $1^{1}/_{8}$ | 44 | 44 | 100 | 750 |
| LDPA 238 | $1^{3}/_{16}$ | 46 | 44 | 100 | 750 |
| LDPA 240 | $1^{1}/_{4}$ | 48 | 44 | 100 | 750 |
| LDPA 242 | $1^{5}/_{16}$ | 52 | 44 | 100 | 820 |
| LDPA 244 | $1^{3}/_{8}$ | 53 | 44 | 100 | 820 |
| LDPA 246 | $1^{7}/_{16}$ | 56 | 44 | 100 | 820 |
| LDPA 248 | $1^{1}/_{2}$ | 57 | 44 | 100 | 840 |
| LDPA 250 | $1^{9}/_{16}$ | 59.5 | 44 | 100 | 840 |
| LDPA 252 | $1^{5}/_{8}$ | 61 | 44 | 100 | 1170 |
| LDPA 254 | $1^{11}/_{16}$ | 63 | 44 | 100 | 1190 |
| LDPA 256 | $1^{3}/_{4}$ | 65 | 44 | 100 | 1190 |
| LDPA 258 | $1^{13}/_{16}$ | 68 | 44 | 100 | 1180 |
| LDPA 260 | $1^{7}/_{8}$ | 69 | 44 | 100 | 1300 |
| LDPA 264 | 2 | 73 | 44 | 100 | 1440 |
| LDPA 266 | $2^{1}/_{16}$ | 77 | 44 | 100 | 1440 |
| LDPA 268 | $2^{1}/_{8}$ | 78 | 44 | 100 | 1580 |
| LDPA 270 | $2^{3}/_{16}$ | 80 | 44 | 100 | 1580 |
| LDPA 272 | $2^{1}/_{4}$ | 82 | 44 | 100 | 1650 |

WHIT.

W

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| LDPW 207 | 7/16 | 35 | 38 | 100 | 710 |
| LDPW 208 | 1/2 | 38 | 44 | 100 | 750 |
| LDPW 209 | 9/16 | 40.5 | 44 | 100 | 750 |
| LDPW 210 | 5/8 | 42.5 | 44 | 100 | 770 |
| LDPW 211 | 11/16 | 46 | 44 | 100 | 810 |
| LDPW 212 | 3/4 | 49.5 | 44 | 100 | 810 |
| LDPW 213 | 13/16 | 53 | 44 | 100 | 790 |
| LDPW 214 | 7/8 | 57 | 44 | 100 | 790 |
| LDPW 215 | 15/16 | 61 | 44 | 100 | 790 |
| LDPW 216 | 1 | 63 | 44 | 100 | 910 |
| LDPW 218 | $1^{1}/_{8}$ | 68 | 44 | 100 | 1130 |
| LDPW 220 | $1^{1}/_{4}$ | 73 | 44 | 100 | 1310 |

# 3/4” DRIVE IMPACT ACCESSORIES



| | | |
|---|---|---|
| **PES 212S** | 4” Impact Extension | 470 |
| **PES 212M** | 9” Impact Extension | 1000 |
| **PES 208L** | 12” Impact Extension | 1300 |

| | | | |
|---|---|---|---|
| **UPS 212** | Universal Joint | 90 | 560 |

| | | |
|---|---|---|
| **PAC 212** | Converter<br>3/4” female, 1/2” male | 260 |

| | | |
|---|---|---|
| **PAC 216** | Converter<br>3/4” female, 1” male | 470 |



# 1” DRIVE IMPACT

METRIC

M

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| **GPM 219** | 19 | 38.5 | 54 | 60 | 600 |
| **GPM 221** | 21 | 39 | 54 | 60 | 600 |
| **GPM 222** | 22 | 38 | 54 | 60 | 600 |
| **GPM 223** | 23 | 38.5 | 54 | 60 | 600 |
| **GPM 224** | 24 | 38.5 | 54 | 60 | 620 |
| **GPM 225** | 25 | 42 | 54 | 60 | 620 |
| **GPM 226** | 26 | 44 | 54 | 60 | 620 |
| **GPM 227** | 27 | 44.5 | 54 | 60 | 620 |
| **GPM 228** | 28 | 47.5 | 54 | 60 | 620 |
| **GPM 229** | 29 | 49 | 54 | 60 | 640 |
| **GPM 230** | 30 | 50 | 54 | 62 | 640 |
| **GPM 232** | 32 | 52.5 | 54 | 63 | 640 |
| **GPM 233** | 33 | 54 | 54 | 63 | 650 |
| **GPM 234** | 34 | 54 | 54 | 63 | 650 |
| **GPM 235** | 35 | 57 | 54 | 65 | 610 |
| **GPM 236** | 36 | 57 | 54 | 65 | 610 |
| **GPM 237** | 37 | 58 | 54 | 65 | 610 |
| **GPM 238** | 38 | 59 | 54 | 65 | 750 |
| **GPM 241** | 41 | 63 | 54 | 70 | 760 |
| **GPM 242** | 42 | 64 | 54 | 70 | 760 |
| **GPM 246** | 46 | 69 | 58 | 75 | 990 |
| **GPM 247** | 47 | 72 | 68 | 75 | 990 |
| **GPM 250** | 50 | 76 | 68 | 80 | 1000 |
| **GPM 252** | 52 | 79 | 68 | 80 | 1000 |
| **GPM 254** | 54 | 80 | 68 | 80 | 1360 |
| **GPM 255** | 55 | 82 | 68 | 85 | 1380 |
| **GPM 260** | 60 | 88 | 68 | 85 | 1620 |
| **GPM 265** | 65 | 94 | 83 | 85 | 1680 |
| **GPM 270** | 70 | 103 | 83 | 85 | 1850 |
| **GPM 275** | 75 | 110 | 102 | 85 | 2900 |
| **GPM 280** | 80 | 114 | 102 | 90 | 2900 |
| **GPM 285** | 85 | 120 | 102 | 90 | 2950 |
| **GPM 290** | 90 | 126 | 102 | 100 | 2950 |




WHIT.

W

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| **GPW 207** | 7/16 | 39 | 54 | 60 | 600 |
| **GPW 208** | 1/2 | 38.5 | 54 | 60 | 650 |
| **GPW 209** | 9/16 | 44 | 54 | 60 | 650 |
| **GPW 210** | 5/8 | 44.5 | 54 | 62 | 620 |
| **GPW 211** | 11/16 | 50 | 54 | 62 | 620 |
| **GPW 212** | 3/4 | 54 | 54 | 63 | 640 |
| **GPW 213** | 13/16 | 57 | 54 | 65 | 650 |
| **GPW 214** | 7/8 | 59 | 54 | 65 | 650 |
| **GPW 215** | 15/16 | 64 | 54 | 70 | 760 |
| **GPW 216** | 1 | 64 | 54 | 70 | 760 |
| **GPW 218** | $1^{1}/_{8}$ | 69 | 58 | 75 | 760 |
| **GPW 220** | $1^{1}/_{4}$ | 79 | 68 | 80 | 1290 |
| **GPW 222** | $1^{3}/_{8}$ | 84 | 68 | 85 | 1410 |
| **GPW 224** | $1^{1}/_{2}$ | 90 | 83 | 85 | 1620 |
| **GPW 226** | $1^{5}/_{8}$ | 94 | 83 | 85 | 1680 |
| **GPW 228** | $1^{3}/_{4}$ | 103 | 83 | 85 | 1850 |
| **GPW 230** | $1^{7}/_{8}$ | 110 | 102 | 85 | 2900 |
| **GPW 232** | 2 | 114 | 102 | 90 | 2900 |

# 1” DRIVE IMPACT

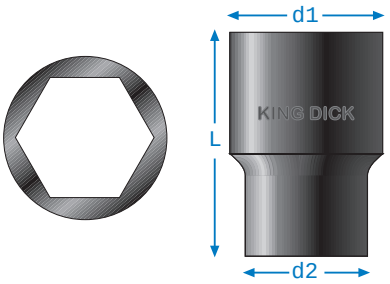


AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GPA 224 | 3/4 | 38.5 | 54 | 60 | 600 |
| GPA 226 | 13/16 | 38 | 54 | 60 | 600 |
| GPA 228 | 7/8 | 35 | 54 | 60 | 610 |
| GPA 230 | 15/16 | 38.5 | 54 | 60 | 610 |
| GPA 232 | 1 | 44 | 54 | 60 | 610 |
| GPA 234 | 1 1/16 | 44.5 | 54 | 60 | 610 |
| GPA 236 | 1 1/8 | 49 | 54 | 60 | 640 |
| GPA 238 | 1 3/16 | 50 | 54 | 62 | 640 |
| GPA 240 | 1 1/4 | 52.5 | 54 | 63 | 640 |
| GPA 242 | 1 5/16 | 54 | 54 | 63 | 640 |
| GPA 244 | 1 3/8 | 57 | 54 | 65 | 640 |
| GPA 246 | 1 7/16 | 58 | 54 | 65 | 640 |
| GPA 248 | 1 1/2 | 59 | 54 | 65 | 750 |
| GPA 250 | 1 9/16 | 62 | 54 | 70 | 750 |
| GPA 252 | 1 5/8 | 63 | 54 | 70 | 760 |
| GPA 254 | 1 11/16 | 66 | 54 | 70 | 940 |
| GPA 256 | 1 3/4 | 68 | 54 | 75 | 1,000 |
| GPA 258 | 1 13/16 | 69 | 68 | 75 | 1,000 |
| GPA 260 | 1 7/8 | 72 | 68 | 75 | 1,030 |
| GPA 262 | 1 15/16 | 74 | 68 | 80 | 1,030 |
| GPA 264 | 2 | 76 | 68 | 80 | 1,030 |
| GPA 266 | 2 1/16 | 79 | 68 | 80 | 1,220 |

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GPA 268 | 2 1/8 | 80 | 68 | 85 | 1,360 |
| GPA 270 | 2 3/16 | 84 | 68 | 85 | 1,360 |
| GPA 272 | 2 1/4 | 84 | 68 | 85 | 1,400 |
| GPA 274 | 2 5/16 | 85 | 68 | 85 | 1,590 |
| GPA 276 | 2 3/8 | 88 | 68 | 85 | 1,590 |
| GPA 278 | 2 7/16 | 90 | 83 | 85 | 1,590 |
| GPA 280 | 2 1/2 | 94 | 83 | 85 | 1,800 |
| GPA 282 | 2 9/16 | 94 | 83 | 85 | 1,800 |
| GPA 284 | 2 5/8 | 96 | 83 | 85 | 1,800 |
| GPA 286 | 2 11/16 | 96 | 83 | 85 | 1,800 |
| GPA 288 | 2 3/4 | 103 | 83 | 85 | 1,880 |
| GPA 290 | 2 13/16 | 103 | 83 | 85 | 1,880 |
| GPA 292 | 2 7/8 | 104 | 102 | 85 | 2,700 |
| GPA 294 | 2 15/16 | 110 | 102 | 85 | 2,700 |
| GPA 296 | 3 | 108 | 102 | 85 | 3,140 |
| GPA 298 | 3 1/16 | 114 | 102 | 90 | 3,140 |
| GPA 299 | 3 1/8 | 114 | 102 | 90 | 3,140 |
| GPA 302 | 3 1/16 | 116 | 102 | 90 | 3,370 |
| GPA 304 | 3 1/4 | 116 | 102 | 90 | 3,370 |
| GPA 308 | 3 3/8 | 120 | 102 | 90 | 3,440 |
| GPA 312 | 3 1/2 | 124 | 102 | 100 | 3,650 |
| GPA 316 | 3 5/8 | 126 | 102 | 100 | 3,720 |

# 1” DRIVE DEEP IMPACT

WHIT.


W



| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GDPW 207 | 7/16 | 39 | 54 | 100 | 1,240 |
| GDPW 208 | 1/2 | 38.5 | 54 | 100 | 1,270 |
| GDPW 209 | 9/16 | 44 | 54 | 100 | 1,270 |
| GDPW 210 | 5/8 | 44.5 | 54 | 100 | 1,200 |
| GDPW 211 | 11/16 | 50 | 54 | 100 | 1,200 |
| GDPW 212 | 3/4 | 54 | 54 | 100 | 1,120 |
| GDPW 213 | 13/16 | 57 | 54 | 100 | 1,120 |
| GDPW 214 | 7/8 | 59 | 54 | 100 | 1,300 |
| GDPW 215 | 15/16 | 64 | 54 | 100 | 1,300 |
| GDPW 216 | 1 | 64 | 54 | 115 | 1,400 |
| GDPW 218 | 1 1/8 | 69 | 58 | 115 | 1,400 |
| GDPW 220 | 1 1/4 | 79 | 68 | 115 | 1,750 |
| GDPW 222 | 1 3/8 | 84 | 68 | 125 | 2,300 |
| GDPW 224 | 1 1/2 | 90 | 83 | 125 | 2,600 |
| GDPW 226 | 1 5/8 | 94 | 83 | 135 | 3,000 |
| GDPW 228 | 1 3/4 | 103 | 83 | 135 | 3,200 |
| GDPW 230 | 1 7/8 | 110 | 102 | 140 | 3,300 |
| GDPW 232 | 2 | 114 | 102 | 140 | 3,470 |

# 1” DRIVE DEEP IMPACT





AF

AF

| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GDPA 224 | 3/4 | 38.5 | 54 | 100 | 1120 |
| GDPA 226 | 13/16 | 38 | 54 | 100 | 1120 |
| GDPA 228 | 7/8 | 35 | 54 | 100 | 1140 |
| GDPA 230 | 15/16 | 38.5 | 54 | 100 | 1140 |
| GDPA 232 | 1 | 44 | 54 | 100 | 1150 |
| GDPA 234 | 1 1/16 | 44.5 | 54 | 100 | 1200 |
| GDPA 236 | 1 1/8 | 49 | 54 | 100 | 1200 |
| GDPA 238 | 1 3/16 | 50 | 54 | 100 | 1200 |
| GDPA 240 | 1 1/4 | 52.5 | 54 | 100 | 1200 |
| GDPA 242 | 1 5/16 | 54 | 54 | 100 | 1200 |
| GDPA 244 | 1 3/8 | 57 | 54 | 100 | 1200 |
| GDPA 246 | 1 7/16 | 58 | 54 | 100 | 1200 |
| GDPA 248 | 1 1/2 | 59 | 54 | 100 | 1300 |
| GDPA 250 | 1 9/16 | 62 | 54 | 100 | 1300 |
| GDPA 252 | 1 5/8 | 63 | 54 | 100 | 1370 |
| GDPA 254 | 1 11/16 | 66 | 54 | 100 | 1450 |
| GDPA 256 | 1 3/4 | 68 | 54 | 115 | 1450 |
| GDPA 258 | 1 13/16 | 69 | 68 | 115 | 1580 |
| GDPA 260 | 1 7/8 | 72 | 68 | 115 | 1600 |
| GDPA 262 | 1 15/16 | 74 | 68 | 115 | 1650 |
| GDPA 264 | 2 | 76 | 68 | 115 | 1650 |
| GDPA 266 | 2 1/16 | 79 | 68 | 115 | 1800 |
| GDPA 268 | 2 1/8 | 80 | 68 | 125 | 1850 |
| GDPA 270 | 2 3/16 | 84 | 68 | 125 | 1850 |
| GDPA 272 | 2 1/4 | 84 | 68 | 125 | 2100 |
| GDPA 274 | 2 5/16 | 85 | 68 | 125 | 2250 |
| GDPA 276 | 2 3/8 | 88 | 68 | 125 | 2550 |
| GDPA 278 | 2 7/16 | 90 | 83 | 125 | 2800 |
| GDPA 280 | 2 1/2 | 94 | 83 | 135 | 3000 |
| GDPA 282 | 2 9/16 | 94 | 83 | 135 | 3000 |
| GDPA 284 | 2 5/8 | 96 | 83 | 135 | 3200 |
| GDPA 286 | 2 11/16 | 96 | 83 | 135 | 3200 |
| GDPA 288 | 2 3/4 | 103 | 83 | 135 | 3200 |
| GDPA 290 | 2 13/16 | 103 | 83 | 135 | 3330 |
| GDPA 292 | 2 7/8 | 104 | 102 | 135 | 3330 |
| GDPA 294 | 2 15/16 | 110 | 102 | 140 | 3338 |
| GDPA 296 | 3 | 108 | 102 | 140 | 3430 |
| GDPA 298 | 3 1/16 | 114 | 102 | 140 | 3430 |
| GDPA 299 | 3 1/8 | 114 | 102 | 140 | 3470 |
| GDPA 302 | 3 1/16 | 116 | 102 | 140 | 3470 |
| GDPA 304 | 3 1/4 | 116 | 102 | 140 | 3590 |
| GDPA 308 | 3 3/8 | 120 | 102 | 140 | 3590 |
| GDPA 312 | 3 1/2 | 124 | 102 | 150 | 3710 |
| GDPA 316 | 3 5/8 | 126 | 102 | 150 | 3790 |

METRIC

M


| PART No. | SIZE | d1 mm | d2 mm | L mm | g |
|---|---|---|---|---|---|
| GDPM 219 | 19 | 38.5 | 54 | 100 | 1240 |
| GDPM 221 | 21 | 39 | 54 | 100 | 1240 |
| GDPM 222 | 22 | 38 | 54 | 100 | 1255 |
| GDPM 223 | 23 | 38.5 | 54 | 100 | 1270 |
| GDPM 224 | 24 | 38.5 | 54 | 100 | 1270 |
| GDPM 225 | 25 | 42 | 54 | 100 | 1270 |
| GDPM 226 | 26 | 44 | 54 | 100 | 1270 |
| GDPM 227 | 27 | 44.5 | 54 | 100 | 1200 |
| GDPM 228 | 28 | 47.5 | 54 | 100 | 1200 |
| GDPM 229 | 29 | 49 | 54 | 100 | 1200 |
| GDPM 230 | 30 | 50 | 54 | 100 | 1200 |
| GDPM 232 | 32 | 52.5 | 54 | 100 | 1200 |
| GDPM 233 | 33 | 54 | 54 | 100 | 1200 |
| GDPM 234 | 34 | 54 | 54 | 100 | 1200 |
| GDPM 235 | 35 | 57 | 54 | 100 | 1200 |
| GDPM 236 | 36 | 57 | 54 | 100 | 1300 |
| GDPM 237 | 37 | 58 | 54 | 100 | 1300 |
| GDPM 238 | 38 | 59 | 54 | 100 | 1300 |
| GDPM 241 | 41 | 63 | 54 | 100 | 1370 |
| GDPM 242 | 42 | 64 | 54 | 115 | 1370 |
| GDPM 246 | 46 | 69 | 58 | 115 | 1580 |
| GDPM 250 | 50 | 76 | 68 | 115 | 1650 |
| GDPM 252 | 52 | 79 | 68 | 115 | 1650 |
| GDPM 254 | 54 | 80 | 68 | 125 | 1650 |
| GDPM 255 | 55 | 82 | 68 | 125 | 2250 |
| GDPM 260 | 60 | 88 | 68 | 125 | 2550 |
| GDPM 265 | 65 | 94 | 83 | 135 | 3000 |
| GDPM 270 | 70 | 103 | 83 | 135 | 3200 |
| GDPM 275 | 75 | 110 | 102 | 140 | 3338 |
| GDPM 280 | 80 | 114 | 102 | 140 | 3470 |
| GDPM 285 | 85 | 120 | 102 | 150 | 3590 |
| GDPM 290 | 90 | 126 | 102 | 150 | 3710 |

# 1” DRIVE IMPACT ACCESSORIES

| | | |
|---|---|---|
| PES 216S | 9” Impact Extension | 2,000 |
| PES 216L | 15” Impact Extension | 3,000 |

| | | |
|---|---|---|
| PAC 214 | Converter 1” female, 3/4” male | 550 |

ABINGDON KING DICK unit 11 Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

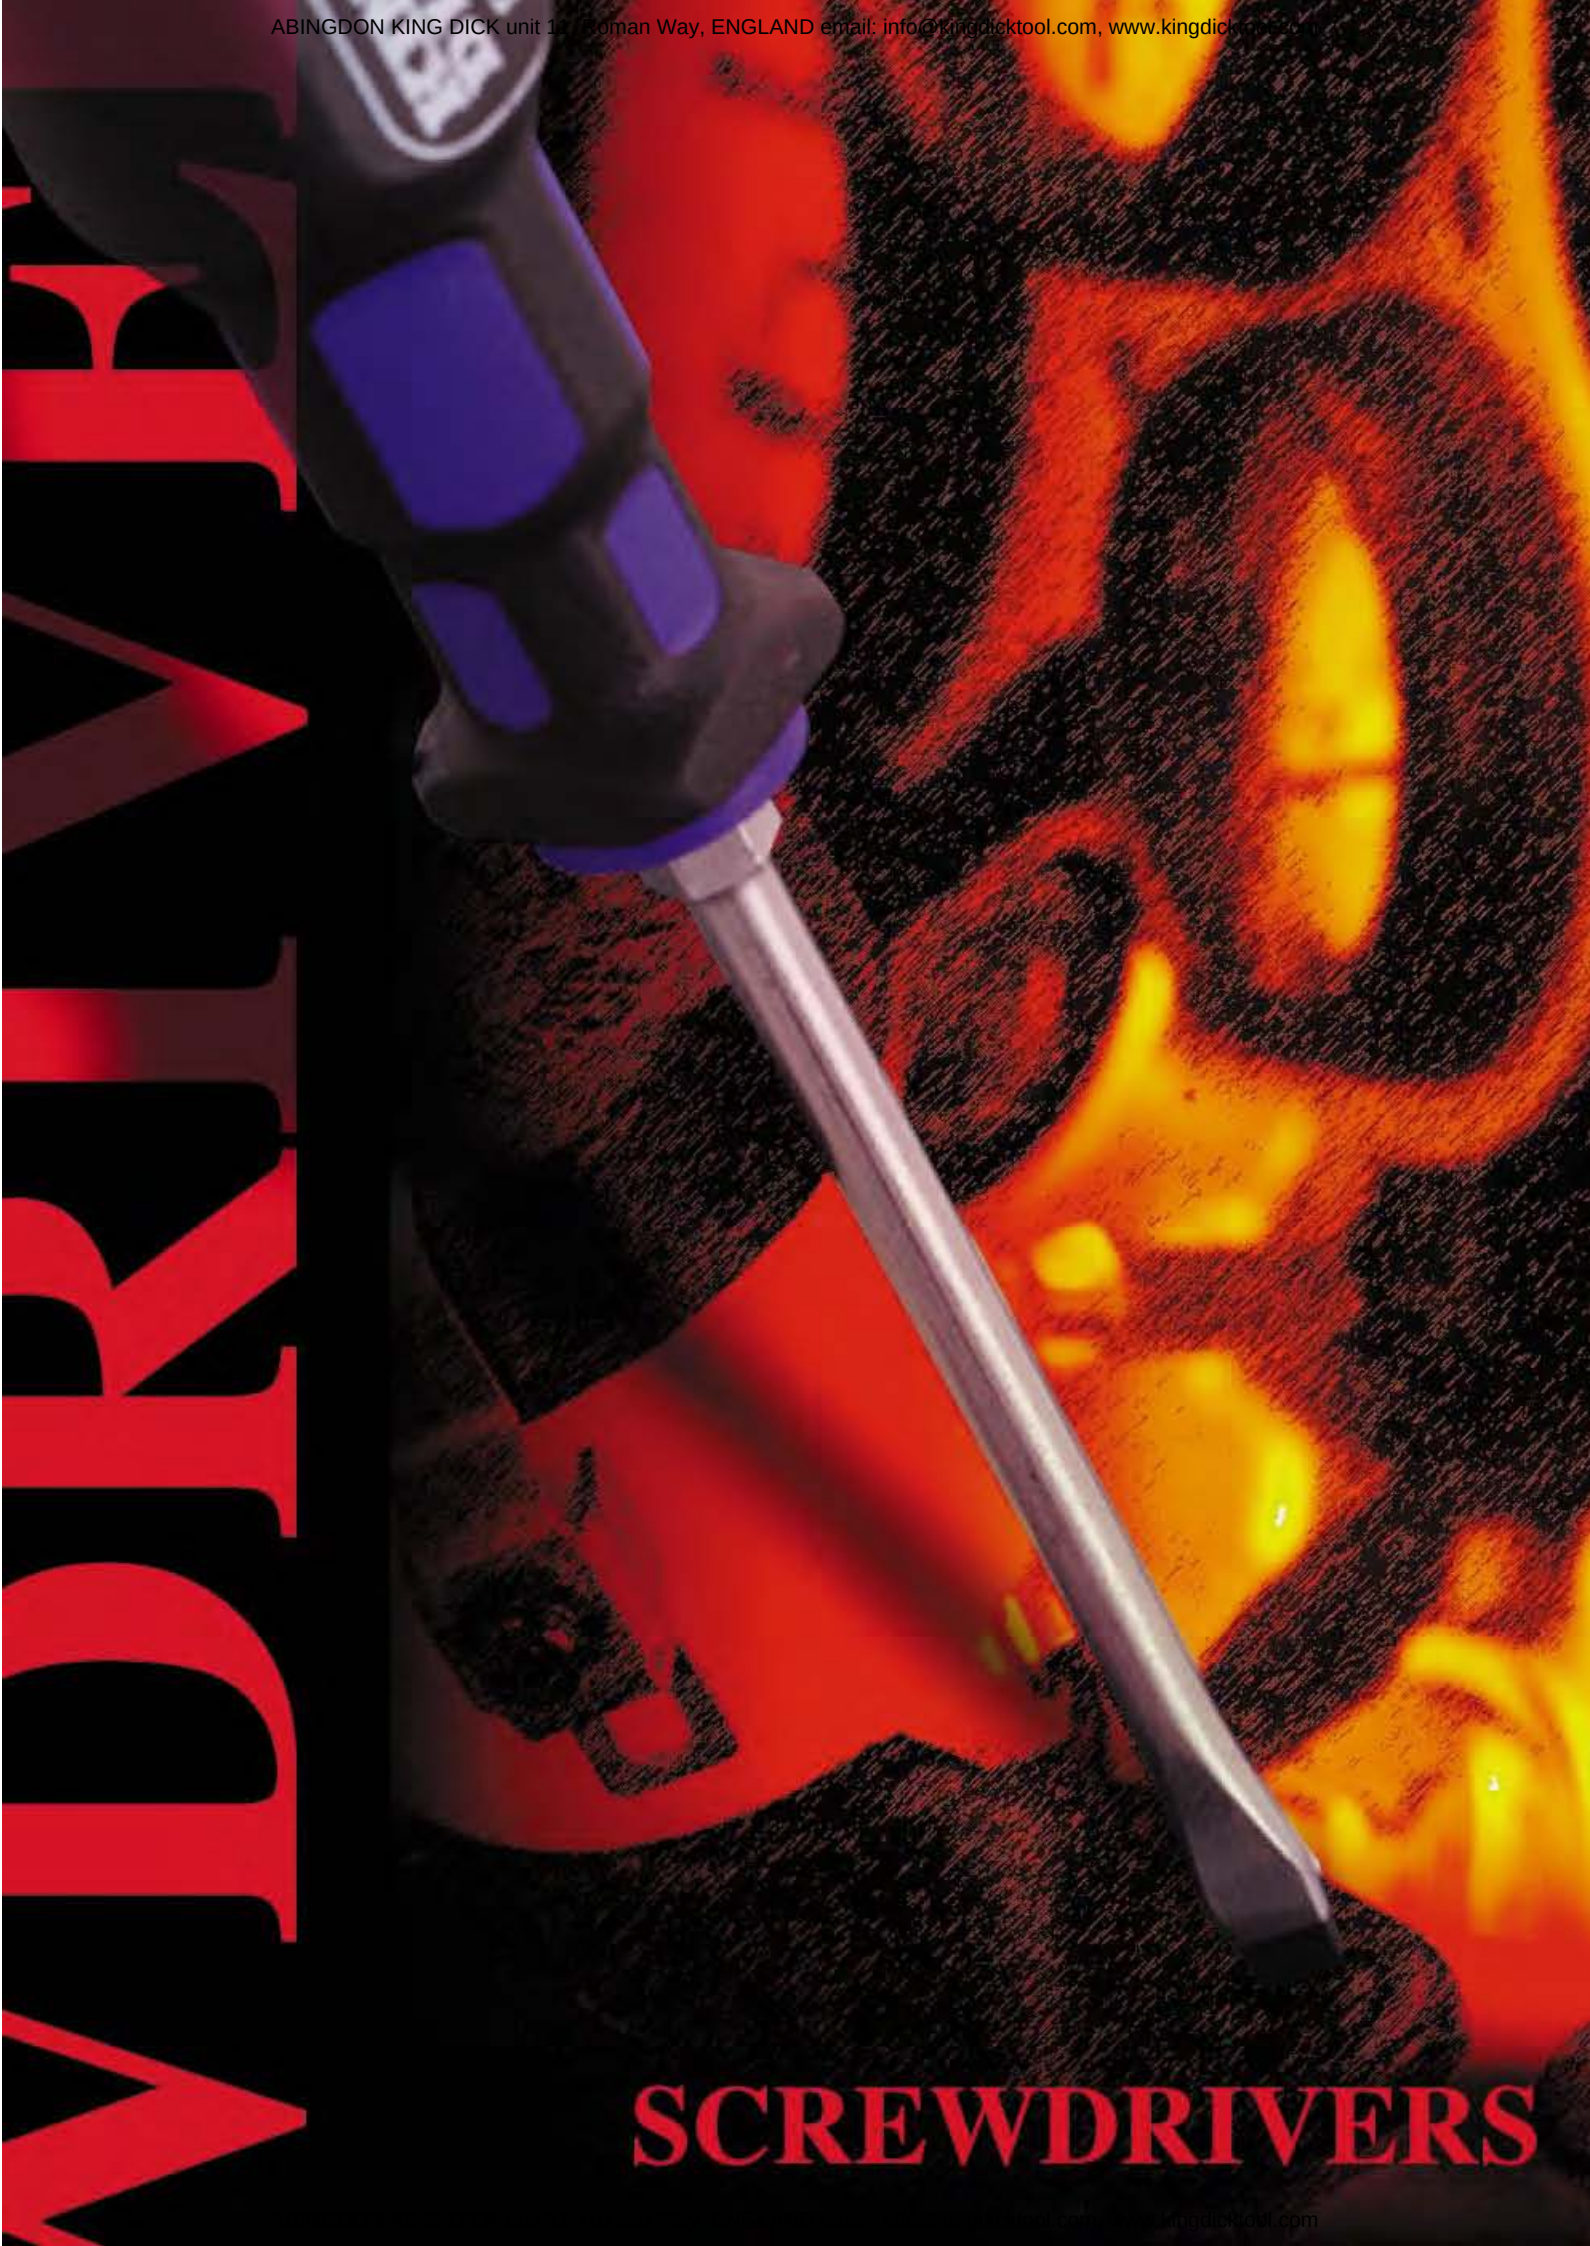


www.kingdicktool.com

# 3 SCREWDRIVERS

All **KING DICK** screwdrivers use high quality blades made from special steel and hardened to provide optimum performance. Blades are matt chrome plated with black tips, (black finish onVDE items).

The handles are anatomically designed to provide optimum pressure with minimal user fatigue, the **SUPER 2000** range having soft and hard feel materials for extra comfort and torque. The handle shapes ensure excellent power transmission.

The special designs accomodate maximum areas of tip contact, thus reducing risk of ‘slip-out’ and potential damage. The vast range offers many products including hexagon bolsters, ball-ends, flexi-shafts, nutspinners, bit holders, stubbys and high torque ‘T’ handles.





**KING DICK** VDE electricians screwdrivers comply with testing regulations according to DIN EN 60900, VDE 0680, part 201 as well as to IEC 900.

KING DICK

# SUPER 2000 RANGE



The anatomically designed handles utilise soft and hard materials in the proven square '3 step' configuration to provide perfect torque transmission with minimum user fatigue.
Matt chromium plated blades with black tips.

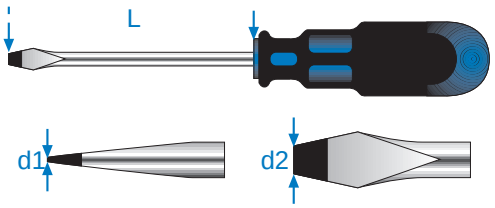





## SLOTTED

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21010 | 0.5 | 3 | 75 |
| 21011 | 0.8 | 4 | 100 |
| 21012 | 1.0 | 5 | 100 |
| 21013 | 1.0 | 5.5 | 125 |
| 21014 | 1.2 | 6 | 125 |

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21015 | 1.2 | 6.5 | 150 |
| 21016 | 1.2 | 7 | 150 |
| 21017 | 1.2 | 8 | 175 |
| 21018 | 1.6 | 10 | 200 |




## HEX SLOTTED

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21120 | 0.6 | 3.5 | 75 |
| 21121 | 0.8 | 4.5 | 90 |
| 21122 | 1.0 | 5.5 | 100 |

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21123 | 1.2 | 7 | 125 |
| 21124 | 1.2 | 8 | 150 |
| 21125 | 1.6 | 10 | 175 |





## ELECTRICIANS SLOTTED

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21450 | 0.4 | 2.5 | 75 |
| 21451 | 0.5 | 3 | 75 |
| 21452 | 0.8 | 4 | 100 |

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 21453 | 1.0 | 5 | 150 |
| 21454 | 1.0 | 5 | 200 |

# SUPER 2000 RANGE










## PHILLIPS

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 21350 | PH-0 | 3 | 60 |
| 21351 | PH-1 | 4.5 | 80 |
| 21352 | PH-2 | 6 | 100 |
| 21353 | PH-3 | 8 | 150 |

## POZI-DRIVE

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 21370 | PZ-0 | 3 | 60 |
| 21371 | PZ-1 | 4.5 | 80 |
| 21372 | PZ-2 | 6 | 100 |
| 21373 | PZ-3 | 8 | 150 |




## PHILLIPS HEX

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 21140 | PH-1 | 4.5 | 80 |
| 21141 | PH-2 | 6 | 100 |
| 21142 | PH-3 | 8 | 150 |

## POZI-DRIVE HEX

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 21160 | PZ-1 | 4.5 | 80 |
| 21161 | PZ-2 | 6 | 100 |
| 21162 | PZ-3 | 8 | 150 |





## TORX

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 24950 | T6 | 3.5 | 50 |
| 24951 | T7 | 3.5 | 50 |
| 24952 | T8 | 3.5 | 60 |
| 24953 | T9 | 4 | 60 |
| 24954 | T10 | 4 | 80 |
| 24955 | T15 | 4 | 80 |

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 24956 | T20 | 4 | 100 |
| 24957 | T25 | 4.5 | 100 |
| 24958 | T27 | 5 | 115 |
| 24959 | T30 | 6 | 115 |
| 24960 | T40 | 7 | 130 |
| 24961 | T45 | 8 | 130 |

# SUPER 2000 VDE

Comply with testing regulations according to DIN EN 60900, VDE 0680, part 201 as well as to IEC 900. This range is designed for current carrying work as per VDE 0680 up to a maximum of 1000Volt a.c., 1500Volt d.c.

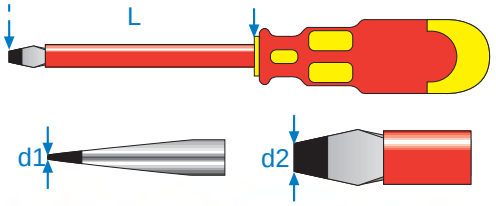





## SLOTTED VDE

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 22470 | 0.4 | 2.5 | 75 |
| 22471 | 0.5 | 3 | 75 |
| 22472 | 0.5 | 3 | 100 |
| 22473 | 0.6 | 3.5 | 100 |
| 22474 | 0.8 | 4 | 100 |

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 22475 | 1.0 | 5.5 | 125 |
| 22476 | 1.2 | 6.5 | 150 |
| 22477 | 1.2 | 8 | 175 |
| 22478 | 1.6 | 10 | 200 |





## PHILLIPS VDE

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 22360 | PH-0 | 3 | 60 |
| 22361 | PH-1 | 4.5 | 80 |
| 22362 | PH-2 | 6 | 100 |
| 22363 | PH-3 | 8 | 150 |

## POZI-DRIVE VDE

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 22380 | PZ-0 | 3 | 60 |
| 22381 | PZ-1 | 4.5 | 80 |
| 22382 | PZ-2 | 6 | 100 |
| 22383 | PZ-3 | 8 | 150 |

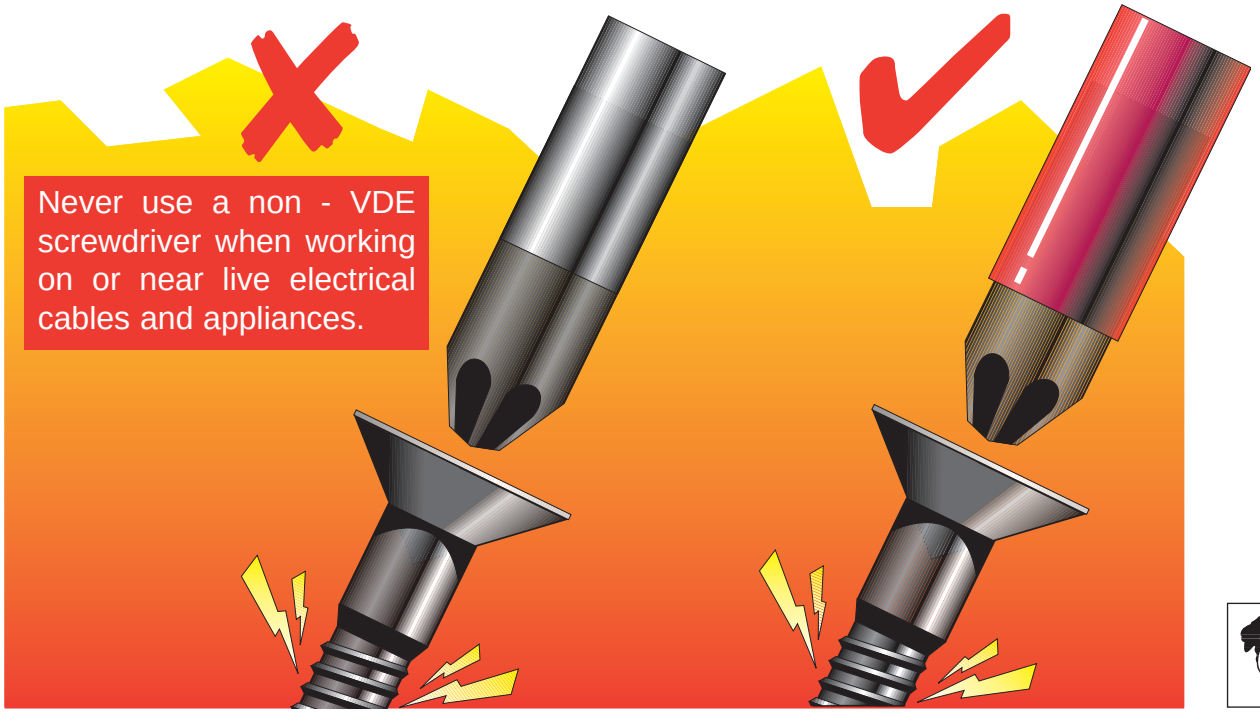

# SUPER 2000 SETS

## SUPER 2000 SET

| PART No. | Contents |
|---|---|
| 25602 | Slot: 5x100, 6x125, 7x150 |
| 6 Piece | PH-1: 4.5x80 |
| | PH-2: 6x100 |
| | Electrician: 4x100 |




## SUPER 2000 HEXSET

| PART No. | Contents |
|---|---|
| 25612 | Hex Slot: 4.5x90, 5.5x100, 7x125 |
| 6 Piece | Hex PH-1: 4.5x80 |
| | Hex PH-2: 6x100 |
| | Electrician: 4x100 |


## SUPER 2000 VDE SET

| PART No. | Contents |
|---|---|
| 25604 | Slot: 2.5x75, 4x100, 5.5x125, 6.5x150 |
| 7 Piece | PH-1: 4.5x80 |
| | PH-2: 6x100 |
| | Voltage Tester: 40100 |

## SUPER 2000 TORX SET

| PART No. | Contents |
|---|---|
| 256113 | T9, T10, T15, T20, |
| 8 Piece | T25, T27, T30, T40. |

# LETS TORX

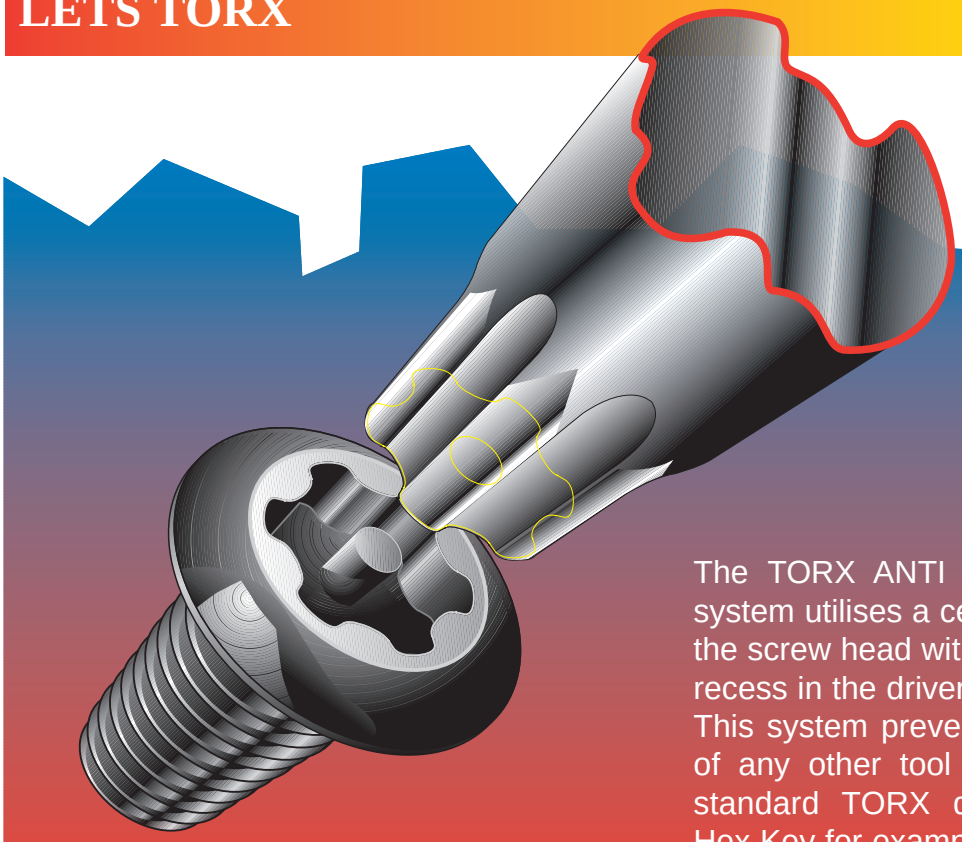

The TORX ANTI - TAMPER system utilises a central pin in the screw head with a locating recess in the driver tip.
This system prevents the use of any other tool such as a standard TORX driver or a Hex Key for example.



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# TORX DRIVERS






## TORX SCREWDRIVER

| PART No. | d1 | L mm |
|---|---|---|
| 49500 | T6 | 50 |
| 49501 | T7 | 50 |
| 49502 | T8 | 60 |
| 49503 | T9 | 60 |
| 49504 | T10 | 80 |
| 49505 | T15 | 80 |
| 49506 | T20 | 100 |

| PART No. | d1 | L mm |
|---|---|---|
| 49507 | T25 | 100 |
| 49508 | T27 | 115 |
| 49509 | T30 | 115 |
| 49510 | T40 | 130 |
| 49511 | T45 | 130 |
| 49512 | T50 | 150 |




## TORX ANTI-TAMPER

| PART No. | d1 | L mm |
|---|---|---|
| 49515 | T9 | 60 |
| 49516 | T10 | 80 |
| 49517 | T15 | 80 |
| 49518 | T20 | 100 |

| PART No. | d1 | L mm |
|---|---|---|
| 49519 | T25 | 100 |
| 49520 | T27 | 115 |
| 49521 | T30 | 115 |
| 49522 | T40 | 130 |




## TORX BALL ENDED

| PART No. | d1 | L mm |
|---|---|---|
| 49523 | T15 | 80 |
| 49524 | T20 | 100 |
| 49525 | T25 | 100 |
| 49526 | T27 | 115 |

| PART No. | d1 | L mm |
|---|---|---|
| 49527 | T30 | 115 |
| 49528 | T40 | 130 |
| 49529 | T45 | 130 |

# HEX DRIVERS & NUT SPINNERS




## BALL END HEX DRIVER

| PART No. | d2 mm | L mm |
|---|---|---|
| 37000 | 2.5 | 75 |
| 37001 | 3 | 75 |
| 37002 | 4 | 100 |
| 37003 | 5 | 100 |

| PART No. | d2 mm | L mm |
|---|---|---|
| 37004 | 6 | 125 |
| 37005 | 8 | 150 |
| 37006 | 10 | 175 |
| 37007 | 12 | 200 |




## HEX DRIVER/BIT HOLDER

| PART No. | L mm | |
|---|---|---|
| 30510 | 125 | 1/4" HEXAGON (magnetic) |




## FLEXI SHAFT SPINNER

| PART No. | SW mm | L mm |
|---|---|---|
| 37900 | 5 | 145 |
| 37901 | 6 | 145 |

| PART No. | SW mm | L mm |
|---|---|---|
| 37902 | 7 | 145 |
| 37903 | 8 | 150 |






## NUT SPINNER

| PART No. | SW BA | L mm |
|---|---|---|
| 493 BA 0 | 0 | 125 |
| 493 BA 1 | 1 | 125 |
| 493 BA 2 | 2 | 125 |
| 493 BA 3 | 3 | 125 |
| 493 BA 4 | 4 | 125 |
| 493 BA 5 | 5 | 125 |
| 493 BA 6 | 6 | 125 |
| 493 BA 7 | 7 | 125 |
| 493 BA 8 | 8 | 125 |
| 493 BA 9 | 9 | 125 |
| 493 BA 10 | 10 | 125 |

| PART No. | SW mm | L mm |
|---|---|---|
| 49304 | 5 | 125 |
| 49305 | 5.5 | 125 |
| 49306 | 6 | 125 |
| 49307 | 7 | 125 |
| 49308 | 8 | 125 |
| 49309 | 9 | 125 |
| 49310 | 10 | 125 |
| 49311 | 11 | 125 |
| 49312 | 12 | 125 |
| 49313 | 13 | 125 |
| 49314 | 14 | 125 |
| 49315 | 15 | 125 |
| 49516 | 16 | 125 |
| 49517 | 17 | 125 |

# 'PROFI' SCREWDRIVERS







## SLOTTED ELECTRICIANS

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **64502** | 0.6 | 3.5 | 100 |
| **64504** | 0.8 | 4 | 125 |

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **64505** | 1 | 5 | 150 |
| **64506** | 1 | 5 | 200 |




## HEX SLOTTED

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **61200** | 0.6 | 3.5 | 75 |
| **61201** | 0.8 | 4.5 | 90 |
| **61202** | 1 | 5.5 | 100 |
| **61203** | 1.2 | 6.5 | 125 |
| **61204** | 1.2 | 7 | 125 |

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **61205** | 1.2 | 8 | 150 |
| **61206** | 1.6 | 10 | 175 |
| **61207** | 2 | 12 | 200 |
| **61208** | 2.5 | 14 | 250 |




## PHILLIPS HEX

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **61400** | PH-1 | 4.5 | 80 |
| **61401** | PH-2 | 6 | 100 |

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **61402** | PH-3 | 8 | 150 |
| **61403** | PH-4 | 10 | 200 |

# 'PROFI' STUBBY SCREWDRIVERS







## SLOTTED STUBBY

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| **62900** | 0.8 | 4 | 25 |
| **62901** | 1 | 5.5 | 25 |
| **62902** | 1.2 | 6.5 | 25 |
| **62903** | 1.2 | 8 | 25 |

## PHILLIPS STUBBY

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| **63505** | PH-01 | 4.5 | 25 |
| **63506** | PH-02 | 6 | 25 |

# VOLTAGE TESTERS






## RANGE 150-250V

| PART No. | d2 mm | L mm |
|---|---|---|
| **40100** | 3 | 60 |

| PART No. | d2 mm | L mm |
|---|---|---|
| **40700** | 3.5 | 100 |


# CAUTION

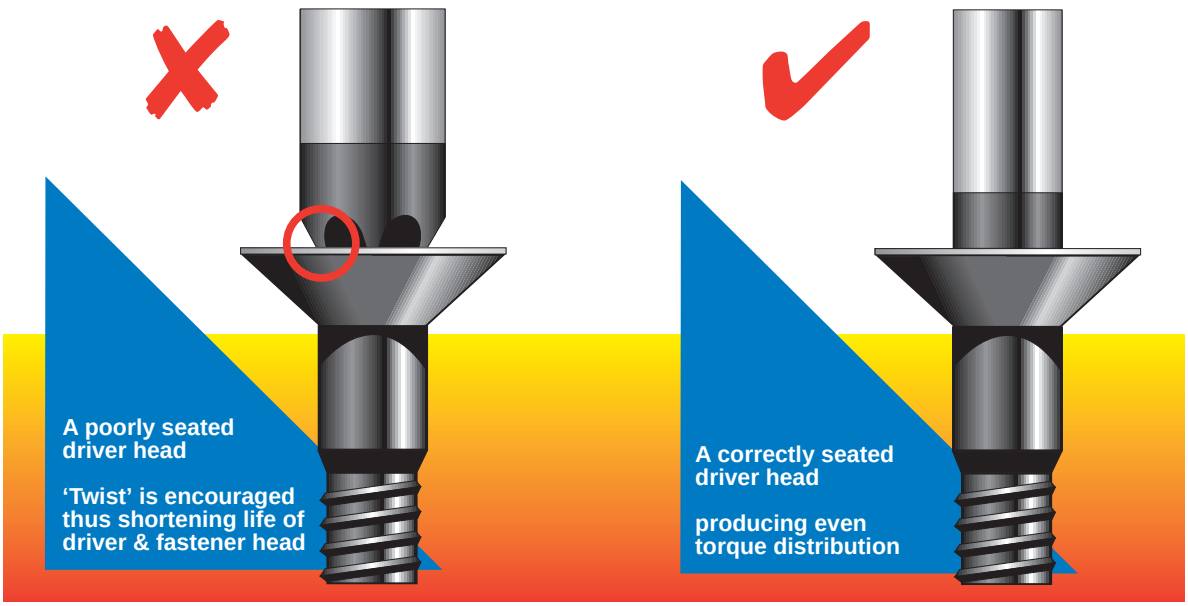

# ‘PROFI’ T HANDLED DRIVERS




## ‘T’ HEX WRENCH

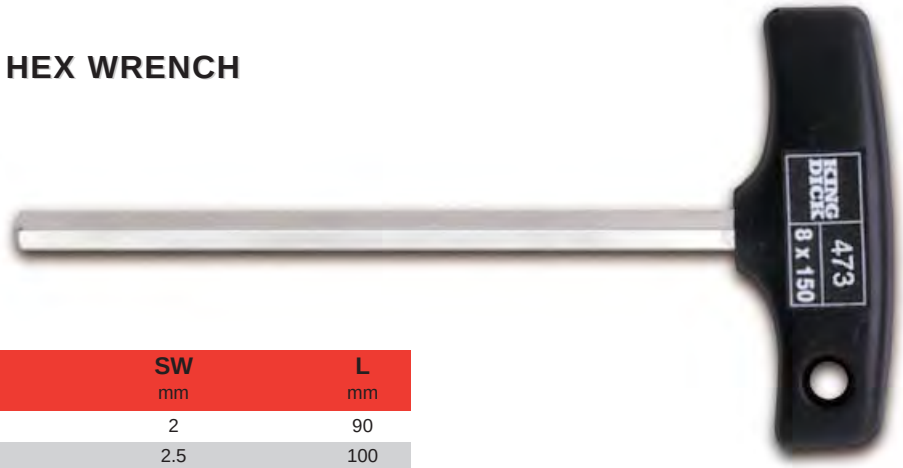


| PART No. | SW mm | L mm |
|---|---|---|
| 47300 | 2 | 90 |
| 47301 | 2.5 | 100 |
| 47302 | 3 | 100 |
| 47306 | 4 | 150 |
| 47309 | 5 | 150 |
| 47312 | 6 | 150 |
| 47315 | 8 | 150 |

| PART No. | SW mm | L mm |
|---|---|---|
| 47318 | 10 | 200 |
| 47319 | 12 | 200 |


## ‘T’ TORX WRENCH

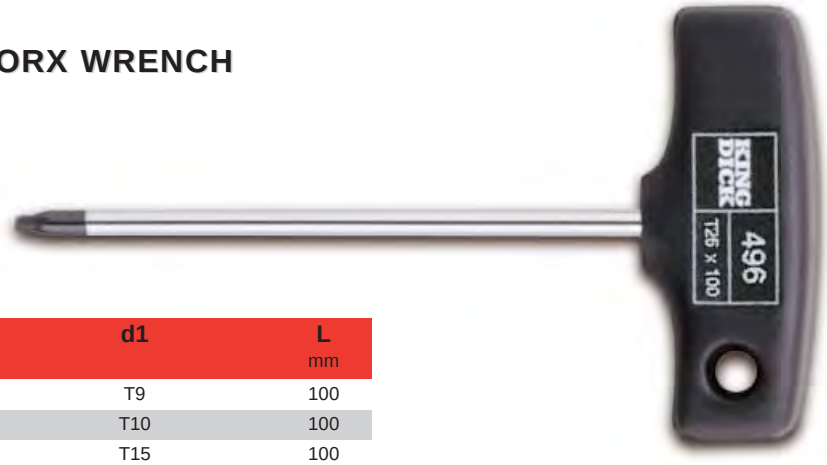


| PART No. | d1 | L mm |
|---|---|---|
| 49600 | T9 | 100 |
| 49601 | T10 | 100 |
| 49602 | T15 | 100 |
| 49603 | T20 | 100 |
| 49604 | T25 | 100 |
| 49605 | T27 | 100 |
| 49606 | T30 | 100 |
| 49607 | T40 | 100 |

| PART No. | SW mm | L mm |
|---|---|---|
| 49608 | T45 | 150 |
| 49609 | T50 | 150 |

## ‘T’ NUT SPINNER

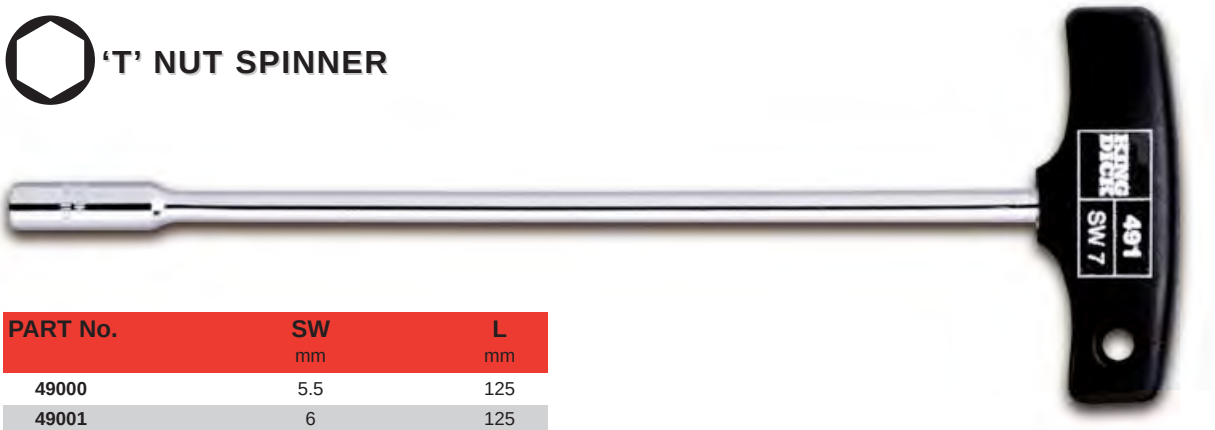


| PART No. | SW mm | L mm |
|---|---|---|
| 49000 | 5.5 | 125 |
| 49001 | 6 | 125 |
| 49100 | 7 | 230 |
| 49101 | 8 | 230 |
| 49102 | 9 | 230 |
| 49103 | 10 | 230 |
| 49104 | 11 | 230 |

| PART No. | SW mm | L mm |
|---|---|---|
| 49105 | 12 | 230 |
| 49106 | 13 | 230 |

# RATCHET SCREWDRIVERS




Reversible
Positive Gearless Action
High Torque Capacity
Magnetic Bit Holder
Supplied with Set of 1/4" Hex Screwdriver Bits



## RATCHET BIT HOLDER

| PART No. | Description | L mm |
|---|---|---|
| SDG 106S | STUBBY | 50 |
| SDG 106M | STANDARD | 100 |
| SDG 106L | LONG | 200 |

| PART No. | Description | L mm |
|---|---|---|
| SDG 106T | T - HANDLED | 100 |

# 'PROFI' RANGE SETS

## PROFI HEX SET

| PART No. | Contents |
|---|---|
| 56070<br>6 Piece | Hex Slot: 4.5x90, 5.5x100, 7x125<br>Hex PH-1: 4.5x80<br>Hex PH-2: 6x100<br>Electrician: 4x100 |





## ELECTRONIC SET

| PART No. | Contents |
|---|---|
| 55760<br>7 Piece | Slot: 1.5x60, 1.8x60, 2.5x75, 3x100<br>PH-00: 2x60<br>PH-0: 3x60<br>PH-1: 4.5x60 |

## TORX SET

| PART No. | Contents |
|---|---|
| 55770<br>7 Piece | T6, T7, T8, T9, T10,<br>T15, T20. |

Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

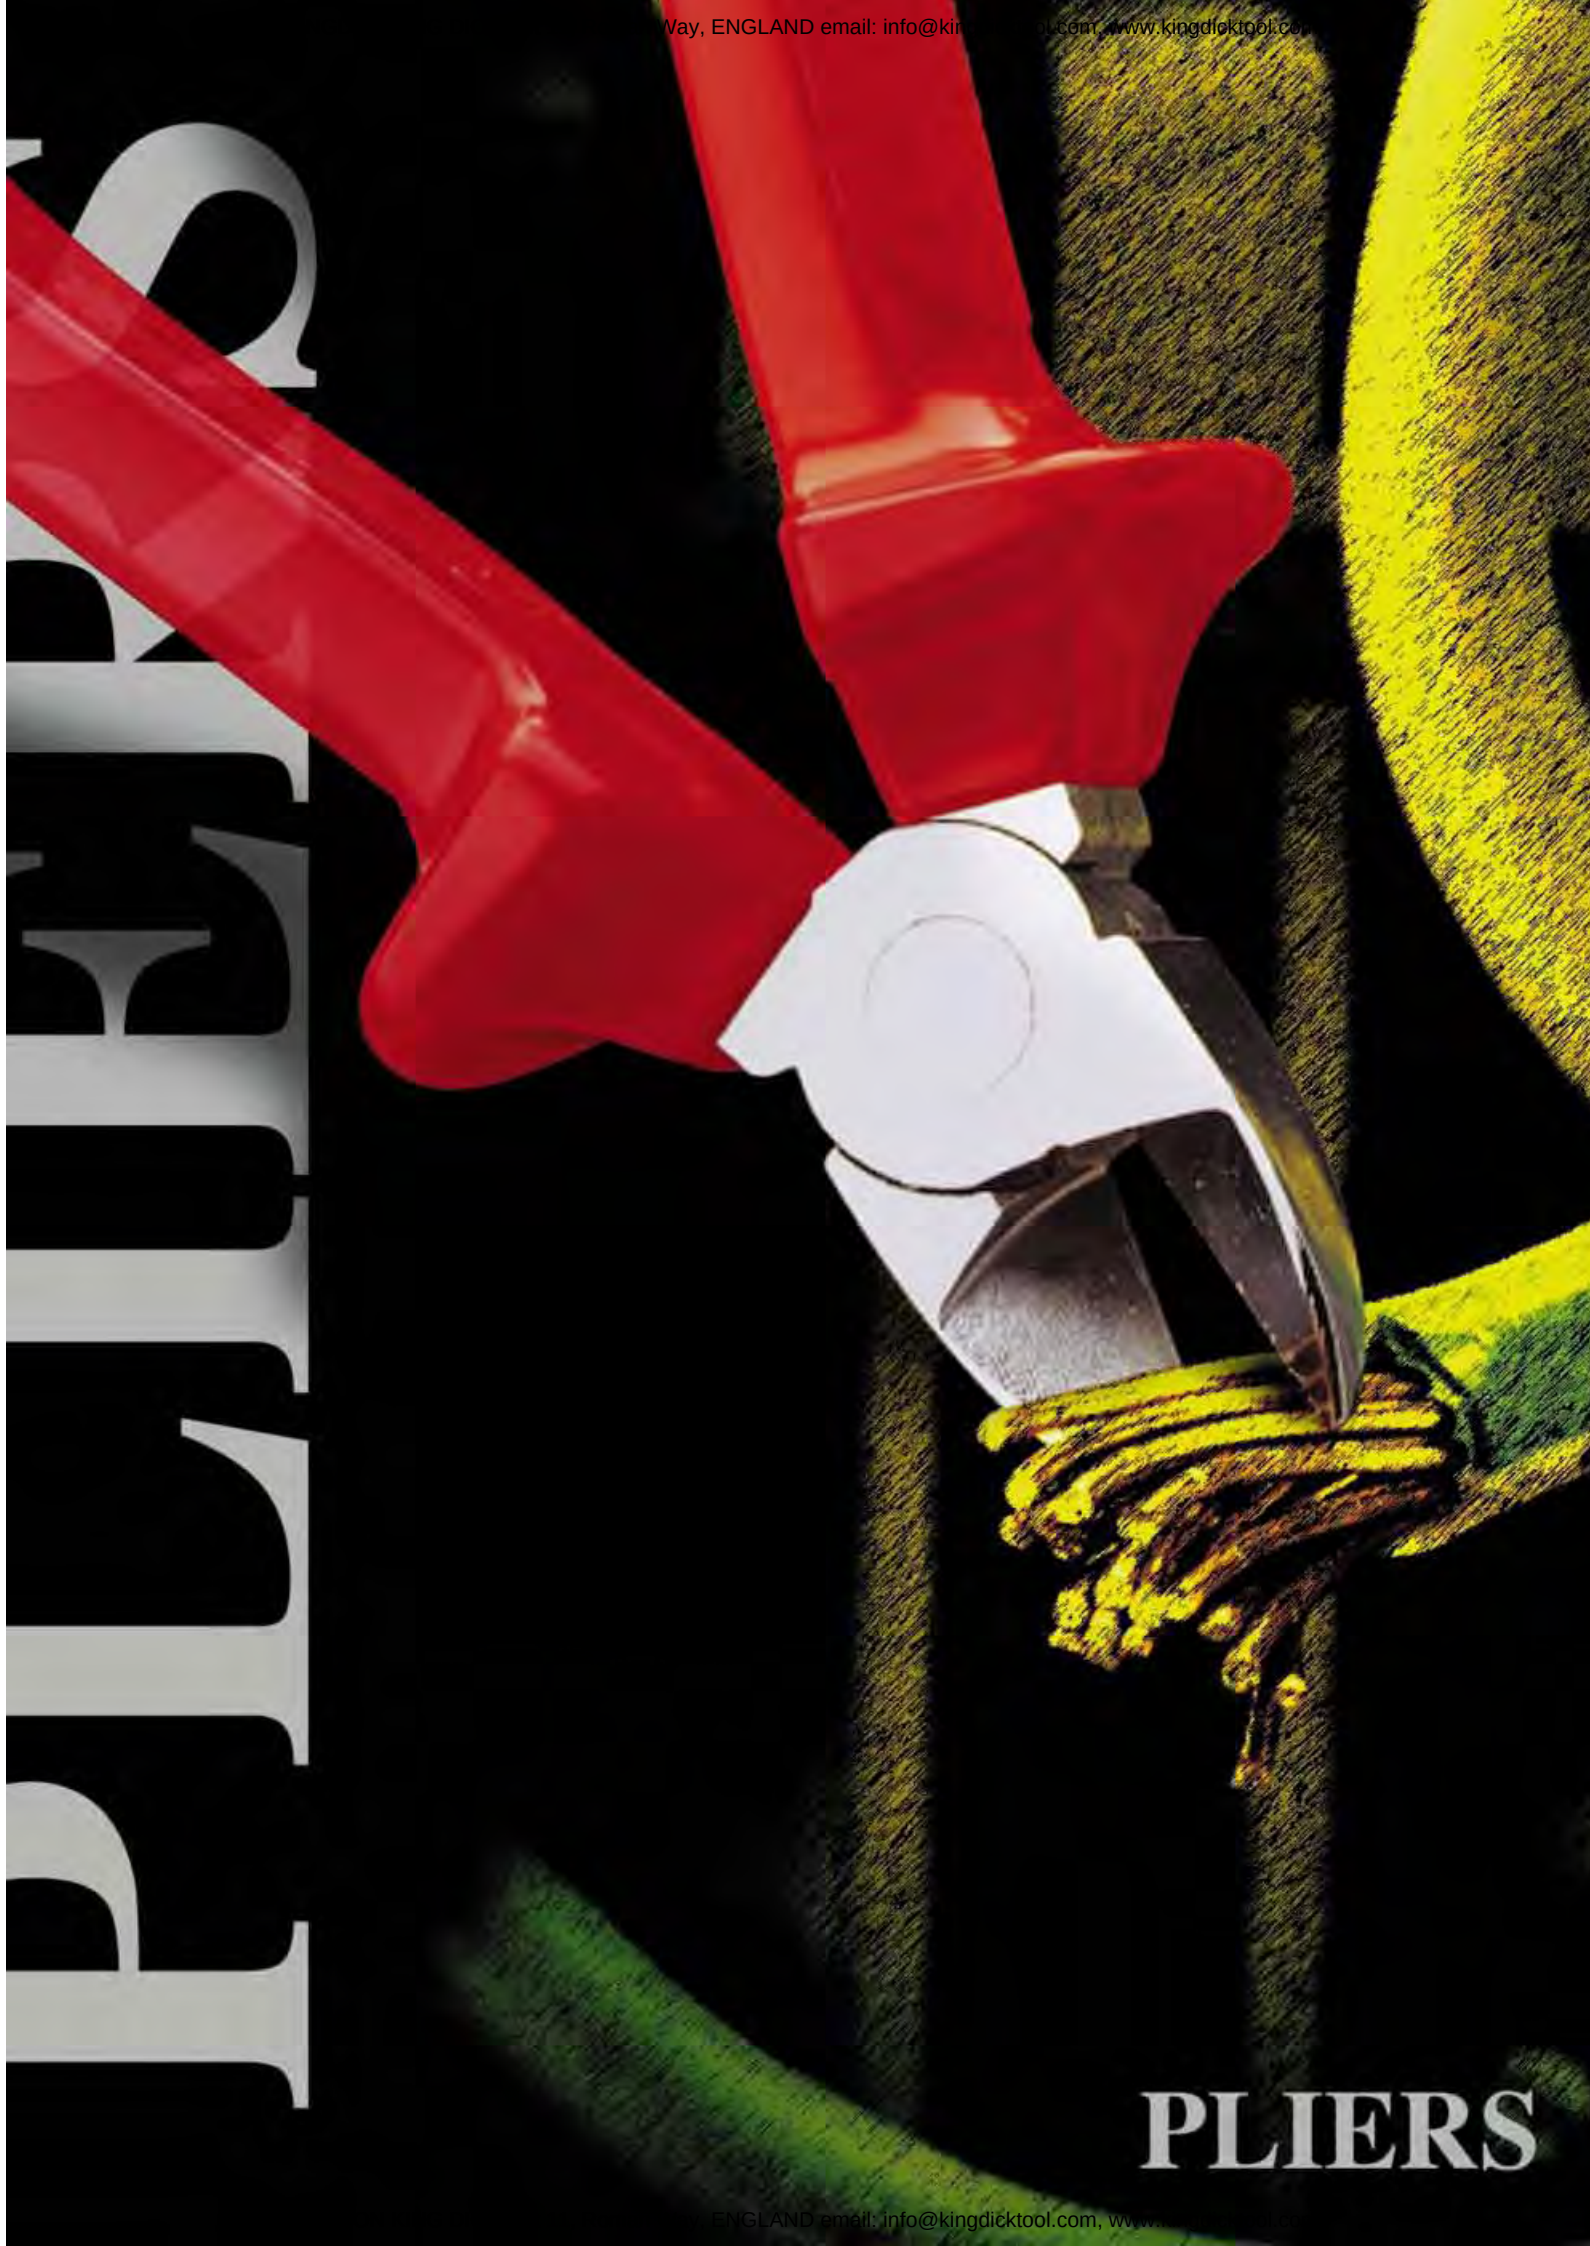


ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

4

# PLIERS

**KING DICK** pliers offer the professional a range to suit each individual's requirement.

Designed for optimum grip and slip-proof use, the pliers are available with a choice of handles, including the bi-material, soft grip which provides maximum power transmission with minimum fatigue.

The comprehensive VDE range available also features this cushioned handle.




**KING DICK** pliers are made from drop forged, high grade steel and are manufactured in accordance with DIN and ISO standards for industrial use, and carry a five year warranty.

KING DICK

# INDUSTRIAL RANGE



## COMBINATION

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 165** | Standard | 165 | 220 |
| **KDP 180** | Standard | 180 | 250 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 205** | Standard | 205 | 330 |



## LONG NOSE

| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNP 170** | Standard | 170 | 140 |
| **LNP 205** | Standard | 205 | 170 |
| **LNPF 160** | Flat Nose | 160 | 120 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNPR 160** | Round Nose | 160 | 110 |
| **LNPB 170** | Bent Nose | 170 | 140 |
| **LNPB 205** | Bent Nose | 205 | 170 |




## CUTTING PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **DCP 145** | Diagonal Cutting | 145 | 150 |
| **DCP 160** | Diagonal Cutting | 160 | 180 |
| **DCP 180** | Diagonal Cutting | 180 | 210 |
| **DCP 200** | Diagonal Cutting | 200 | 280 |
| **DCP 250** | Diagonal Cutting | 250 | 320 |
| **FCP 160** | Front Cutting Nipper | 160 | 210 |
| **FCP 180** | Front Cutting Nipper | 180 | 280 |
| **FCP 220** | Tower Pincer | 220 | 340 |
| **FCP 250** | Tower Pincer | 250 | 450 |



**CAUTION!**
Protective eyewear is essential whenever cutters are used

# INDUSTRIAL RANGE







## CABLE CUTTERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CCP 160** | Standard | 160 | 175 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CCP 210** | Standard | 210 | 270 |







## INDUSTRIAL WIRE STRIPPERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **WSP 160** | Standard | 160 | 140 |


# STRIPPED CLEAN

Precise stripping can be achieved by way of the fine adjustment screw with locking nut.

Ideal for repetition work where consistent results are required.

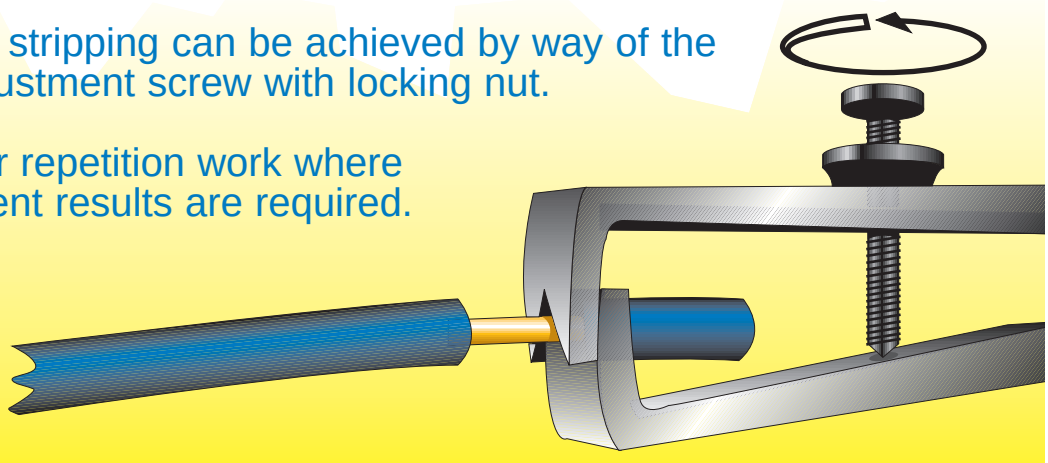

# INDUSTRIAL RANGE










## EXTERNAL CIRCLIP PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CPO 135** | Straight | 135 | 80 |
| **CPO 175** | Straight | 175 | 150 |
| **CPO 220** | Straight | 220 | 250 |
| **CPO 310** | Straight | 310 | 330 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CPOB 125** | Bent Nose | 125 | 80 |
| **CPOB 165** | Bent Nose | 165 | 150 |
| **CPOB 200** | Bent Nose | 200 | 250 |
| **CPOB 290** | Bent Nose | 290 | 440 |









## INTERNAL CIRCLIP PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CPI 135** | Straight | 135 | 80 |
| **CPI 175** | Straight | 175 | 80 |
| **CPI 220** | Straight | 220 | 220 |
| **CPI 310** | Straight | 310 | 310 |


| PART No. | Description | L mm | g |
|---|---|---|---|
| **CPIB 125** | Bent Nose | 125 | 80 |
| **CPIB 165** | Bent Nose | 165 | 150 |
| **CPIB 200** | Bent Nose | 200 | 250 |
| **CPIB 290** | Bent Nose | 290 | 440 |

## INDUSTRIAL RANGE




### LOCKWIRE PLIERS

| PART No. | Description | L mm |
|---|---|---|
| **WLP 225** | Auto Return with Cutter | 225 |




## LETS TWIST

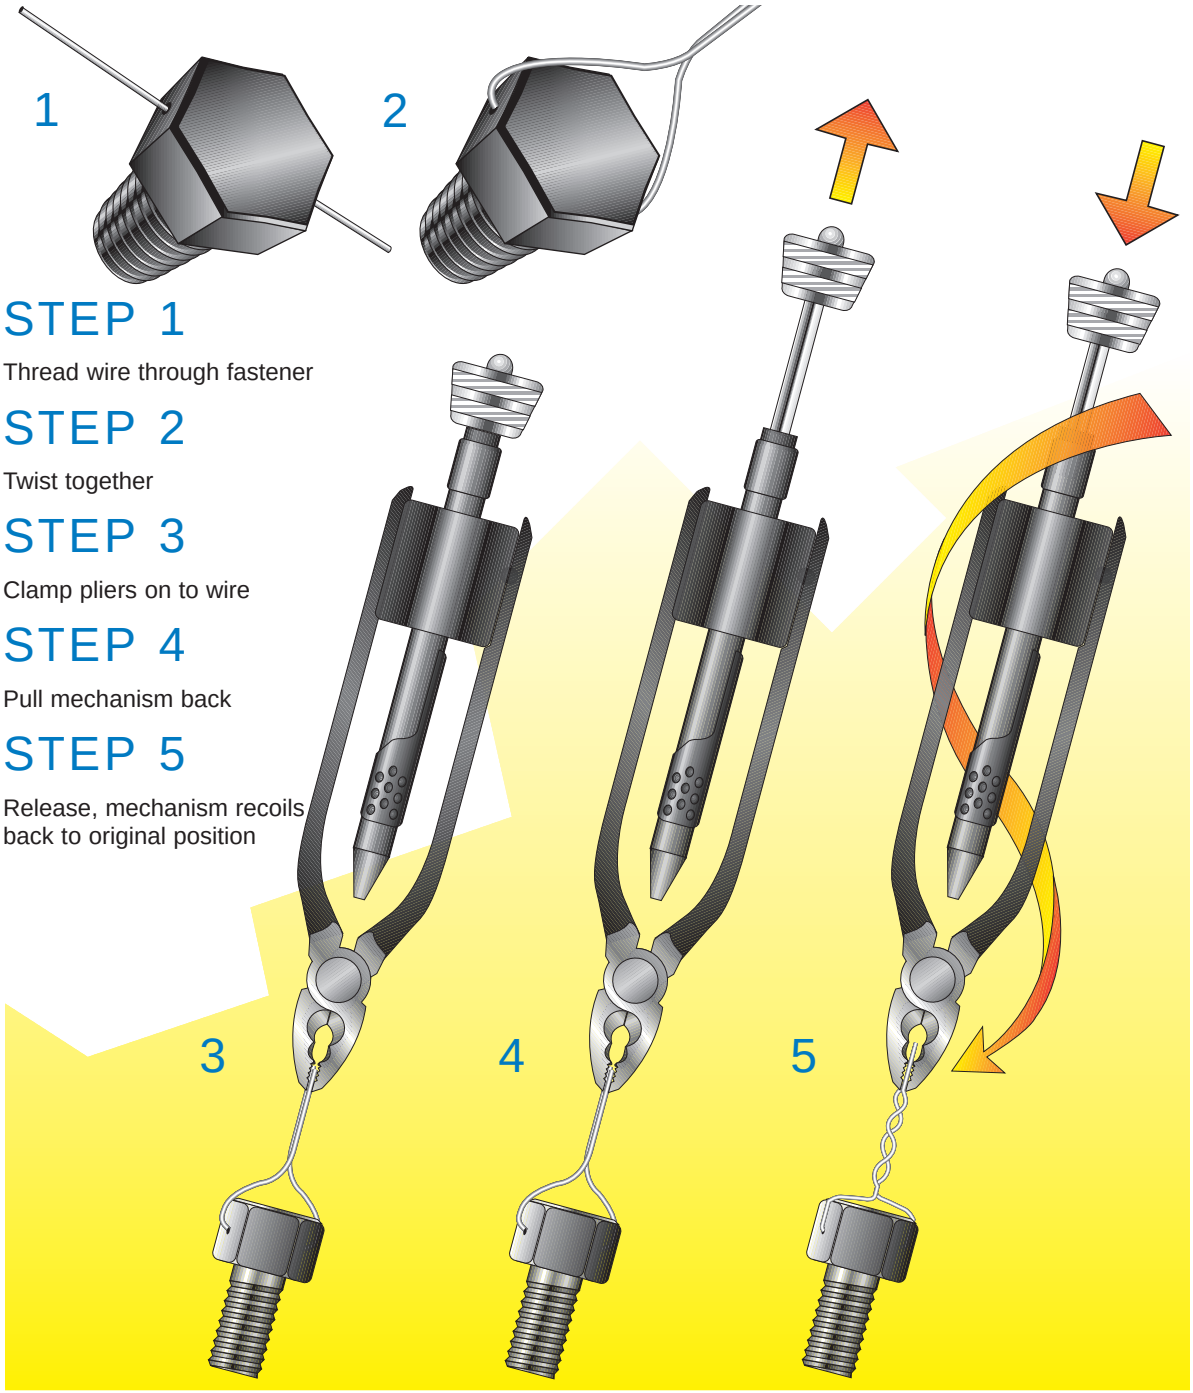


### STEP 1

Thread wire through fastener

### STEP 2

Twist together

### STEP 3

Clamp pliers on to wire

### STEP 4

Pull mechanism back

### STEP 5

Release, mechanism recoils back to original position




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

## INDUSTRIAL RANGE




### LOCKWIRE PLIERS

| PART No. | Description | L mm |
|---|---|---|
| **WLP 225** | Auto Return with Cutter | 225 |




## LETS TWIST

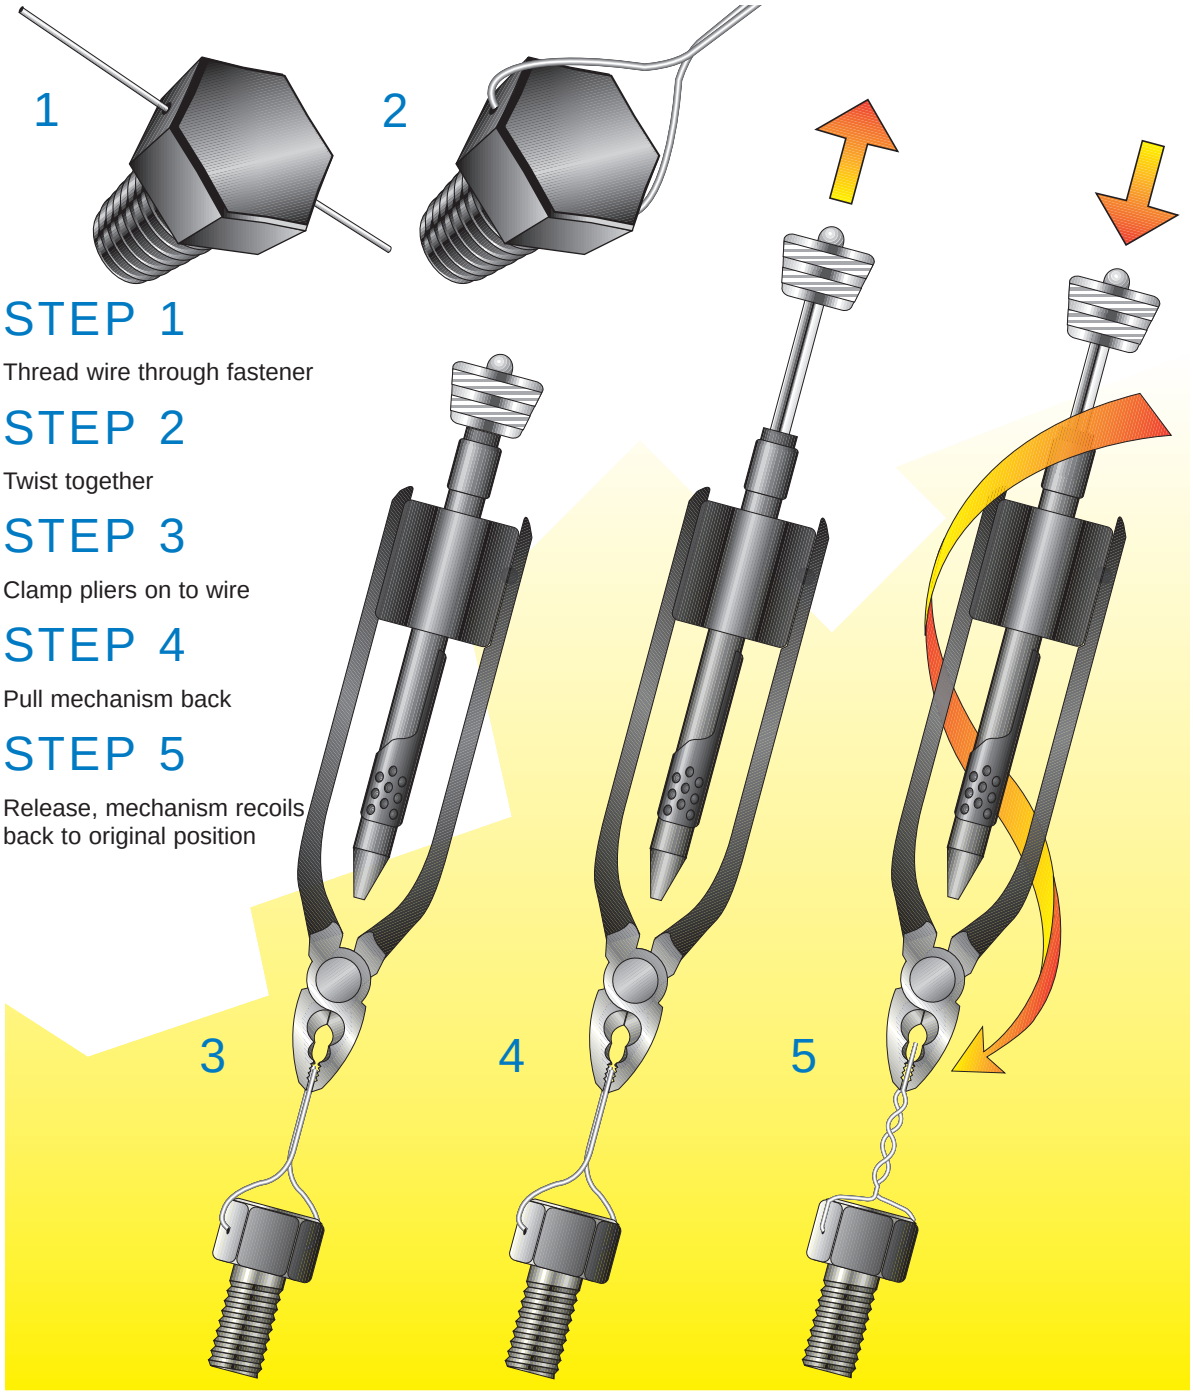


### STEP 1

Thread wire through fastener

### STEP 2

Twist together

### STEP 3

Clamp pliers on to wire

### STEP 4

Pull mechanism back


### STEP 5

Release, mechanism recoils back to original position



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# SUPER 2000 RANGE








## COMBINATION PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 180S** | Standard | 180 | 250 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 205S** | Standard | 205 | 330 |








## LONG NOSE PLIERS


| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNP 170S** | Standard | 170 | 140 |
| **LNP 205S** | Standard | 205 | 170 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNPF 160S** | Flat Nose | 160 | 120 |
| **LNPB 205S** | Bent Nose | 205 | 170 |

# CAUTION

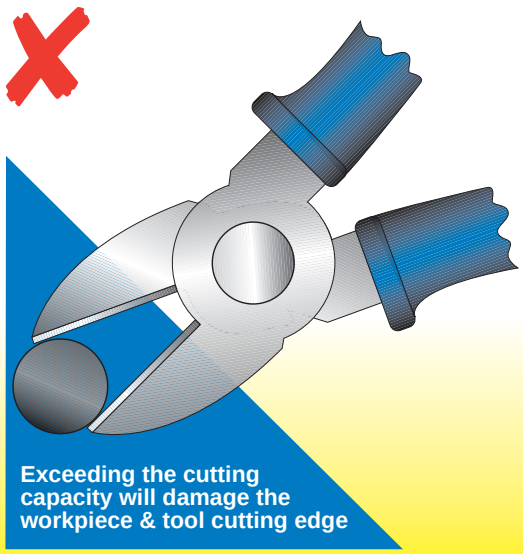


**Exceeding the cutting capacity will damage the workpiece & tool cutting edge**

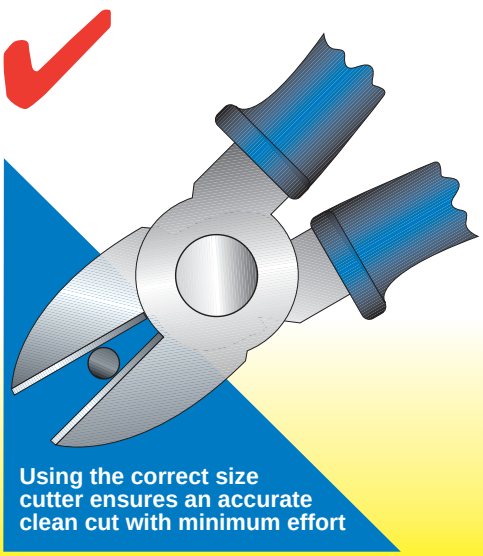

**Using the correct size cutter ensures an accurate clean cut with minimum effort**

# SUPER 2000 RANGE









## CUTTING PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **DCP 160S** | Diagonal Cutting | 160 | 180 |
| **DCP 180S** | Diagonal Cutting | 180 | 210 |


| PART No. | Description | L mm | g |
|---|---|---|---|
| **DCP 180LS** | Lever Diagonal Cutting | 180 | 215 |
| **DCP 200S** | Diagonal Cutting | 200 | 280 |



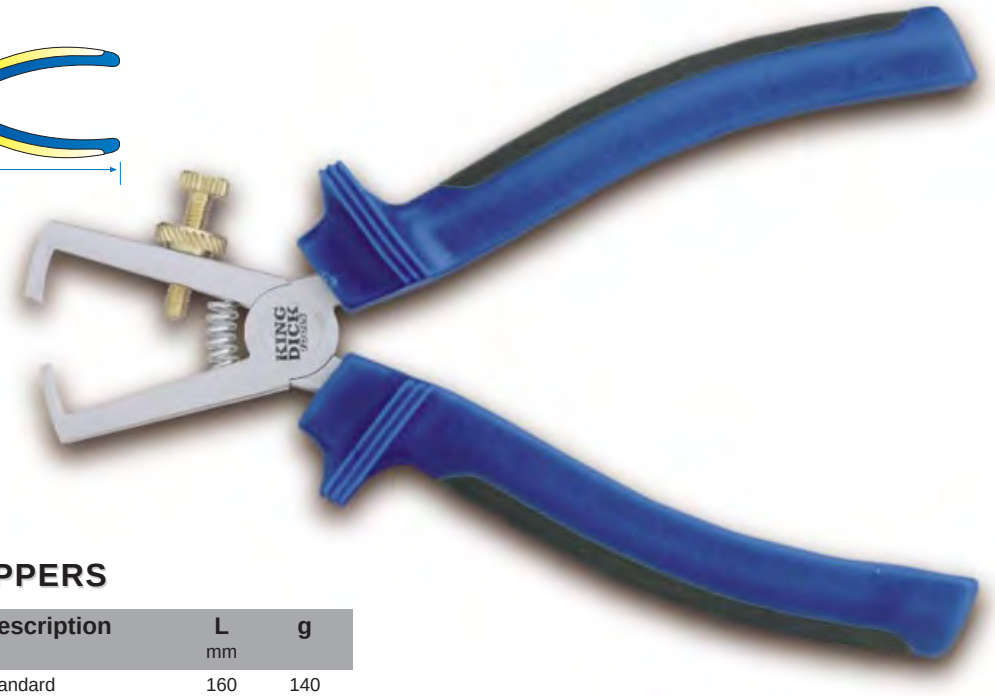
## WIRE STRIPPERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **WSP 160S** | Standard | 160 | 140 |







## CABLE CUTTERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CCP 160S** | Standard | 160 | 175 |

# SUPER 2000 VDE RANGE








## VDE COMBINATION PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 180V** | Standard | 180 | 250 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **KDP 205V** | Standard | 205 | 330 |









## VDE LONG NOSE PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNP 170V** | Standard | 170 | 140 |
| **LNP 205V** | Standard | 205 | 170 |


| PART No. | Description | L mm | g |
|---|---|---|---|
| **LNPF 160V** | Flat Nose | 160 | 120 |
| **LNPB 205V** | Bent Nose | 205 | 170 |

# CAUTION

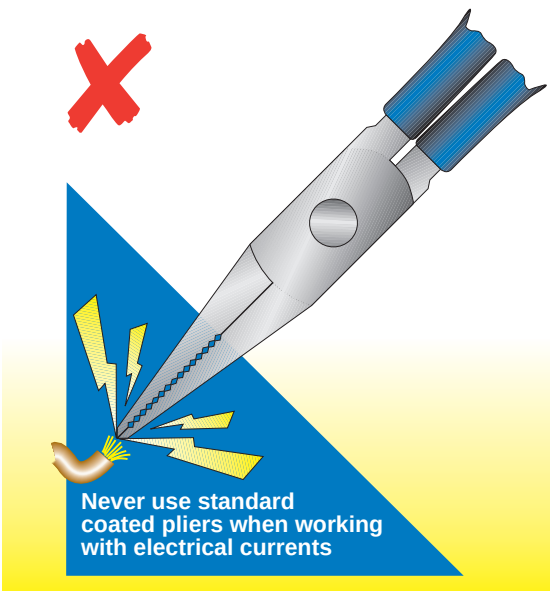
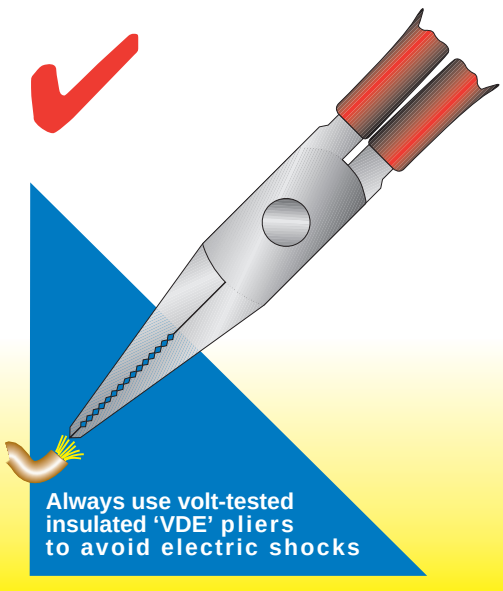
# SUPER 2000 VDE RANGE







## VDE CUTTING PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **DCP 160V** | Diagonal Cutting | 160 | 180 |
| **DCP 180V** | Diagonal Cutting | 180 | 220 |


| PART No. | Description | L mm | g |
|---|---|---|---|
| **DCP 200V** | Diagonal Cutting | 200 | 280 |






## VDE WIRE STRIPPERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **WSP 160V** | Standard | 160 | 140 |







## VDE CABLE CUTTERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **CCP 160V** | Standard | 160 | 175 |

**CAUTION!**
Protective clothing is essential whenever striking is involved

# INDUSTRIAL ELECTRONIC






## ELECTRONIC PLIERS

| PART No. | Description | L mm | g |
|---|---|---|---|
| **EPFN 115** | Flat Nose | 115 | 48 |
| **EPRN 115** | Round Nose | 115 | 48 |
| **EPLN 115** | Long Nose | 115 | 48 |
| **EPEN 115** | End Cutting | 115 | 48 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **EPENF 115** | End Cutting Flush | 115 | 48 |
| **EPDC 115** | Diagonal Cutting | 115 | 63 |
| **EPDCF 115** | Diagonal Cutting Flush | 115 | 63 |

# PLIER SETS





## KDPS 103 - INDUSTRIAL

| Contents | Description | L mm | g set |
|---|---|---|---|
| **KDP 180** | Combination Plier | 180 | |
| **DCP 160** | Diagonal Cutting Plier | 160 | |
| **SJP 240** | Slip Joint Plier | 240 | **850** |

## KDPS 203 - SUPER 2000

| Contents | Description | L mm | g set |
|---|---|---|---|
| **KDP 180S** | Combination Plier | 180 | |
| **DCP 180S** | Diagonal Cutting Plier | 180 | |
| **LNP 170S** | Long Nose Plier | 170 | **650** |

## KDPS 104 - INDUSTRIAL

| Contents | Description | L mm | g set |
|---|---|---|---|
| **KDP 180** | Combination Plier | 180 | |
| **DCP 160** | Diagonal Cutting Plier | 160 | |
| **LNP 170** | Long Nose Plier | 170 | **600** |

## KDPS 303V - SUPER 2000 VDE

| Contents | Description | L mm | g set |
|---|---|---|---|
| **KDP 180V** | Combination Plier | 180 | |
| **DCP 180V** | Diagonal Cutting Plier | 180 | |
| **LNP 170V** | Long Nose Plier | 170 | **650** |

ABI




ABI

5

KING DICK TOOLS

# TORQUE

**KING DICK** torque equipment is reliable, accurate and made to cope with industry's demanding requirements.

Guaranteed precise to within 4%, durability and consistency is paramount within these designs. User friendly, these wrenches feature clear scale markings and easy to set operations with secure locking mechanisms.

The click type wrenches enable progressive and exact torque setting, achieved with a notable sound and feel for operator comfort and precision.



**KING DICK** torque wrenches are fully repairable and are supplied with a twelve month warranty.

KING DICK

# PROFESSIONAL TORQUE WRENCHES




## 'S' RANGE

| PART No. | Drive | Range | L mm | g |
|---|---|---|---|---|
| **KST 2040** | 1/2" | 40-210Nm | 470 | 1,350 |
| **KST 2041** | 3/8" | 5-25Nm | 270 | 490 |
| **KST 2042** | 1/2" | 50-250Nm | 525 | 1,500 |

| PART No. | Drive | Range | L mm | g |
|---|---|---|---|---|
| **KST 2043** | 3/8" | 20-110Nm | 365 | 830 |
| **KST 2044** | 1/2" | 70-350Nm | 630 | 2,450 |
| **KST 2046** | 3/4" | 80-400Nm | 850 | 3,700 |

## INDUSTRIAL RANGE

| PART No. | Drive | Range | L mm | g |
|---|---|---|---|---|
| **KD 3AR** | 3/4" | 100-500Nm | 915 | 5,200 |
| **KD 4R** | 3/4" | 150-700Nm | 1090 | 6,300 |
| **KD 4AR** | 3/4" | 200-800Nm | 1140 | 6,400 |
| **KD 5R** | 3/4" | 300-1000Nm | 1470 | 7,300 |
| **KD 5AR** | 3/4" | 700-1500Nm | 1470 | 10,400 |

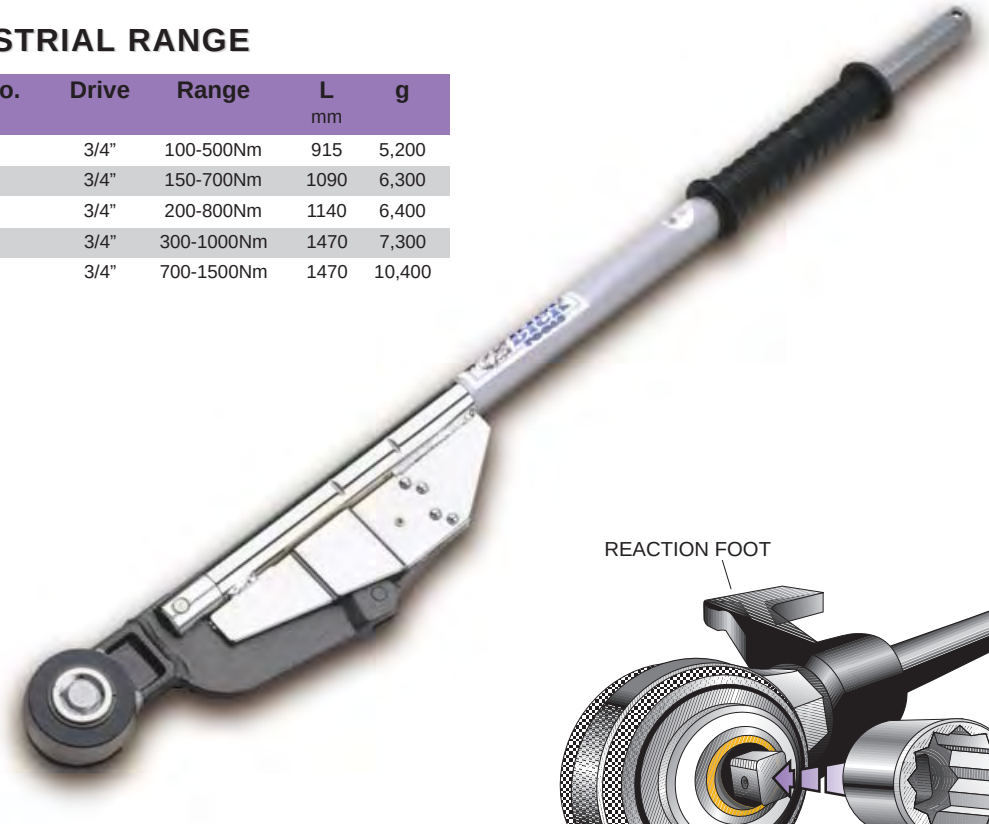





## TORQUE MULTIPLIER

| PART No. |
|---|
| **KDM3** |

Single Stage Epicyclic Gear Train
Multiplication Factor 5:1 ± 4%

*Kit supplied in carrying case comprises:*
1 Multiplier
1 Reaction Bar
1 Offset Reaction Foot
*Weight Complete*: 6.2kg

Heavy duty version 5:1 ratio, 3/4" female square and 36mm male hexagon input, 1" square drive output with maximum torque capacity of 2700Nm (2000lbf ft.)
Straight or offset reaction foot available.

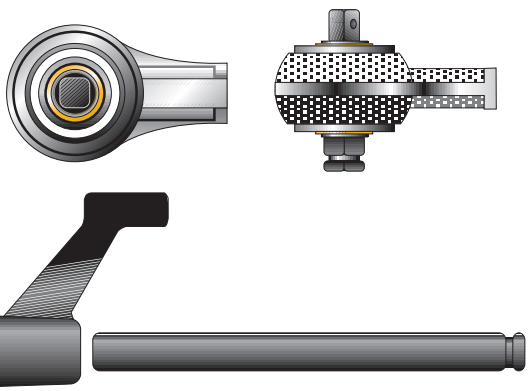

# TORQUEING HELPS


## WHAT IS TORQUE?

**Torque is a 'turning' or 'twisting' force and differs from tension which is created by a straight pull.**

**However, we use torque to create tension:**

**How?** Referring to the diagram, it can be seen that as the nut and bolt are tightened the two plates are uniformley clamped together. The thread angle in the bolt converts the force applied into tension or (stretch) in the bolt shank. The amount of the tension created in the bolt is critical.


**Why?** When a bolt is tensioned correctly it is working at its optimum efficiency and will resist coming undone. However, if the tension is too low the nut could vibrate or work loose. If the tension is too high (overstretched), the bolt could break.

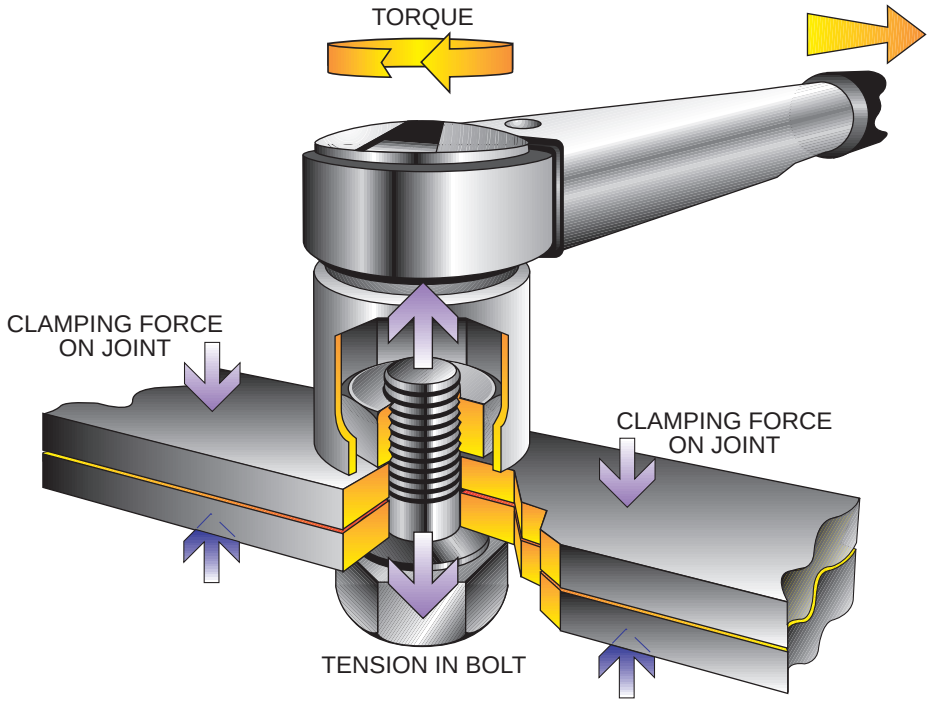



## How do we measure Torque?

Torque is the result of multiplying the value of Force applied by the Distance from the point of application. Comparing the two diagrams below you will see that the same resultant Torque can be achieved with a lower Force if the Distance from the nut/bolt is increased.

It should also be noted that some torque wrenches are "length dependant" which means that the actual torque applied to the fastener varies if the hand position on the wrench is varied - even with the wrench preset! This occurs if the pivot point of the wrench mechanism is not coincidental with the point of application of torque.

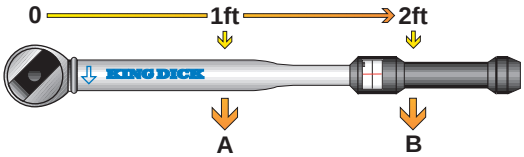



***Example A***
20lb.ft. applied at 1ft distance equates to 20lb.ft.
***Example B***
10lb.ft. applied at 2ft distance equates to 20lb.ft.

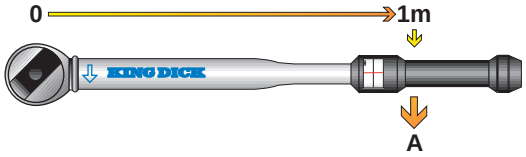


Torque can also be measured in Newton Metres as illustrated above.
***Example A***
1Newton applied at 1m equates to 1N.m.

## TORQUE CONVERSION SCALE

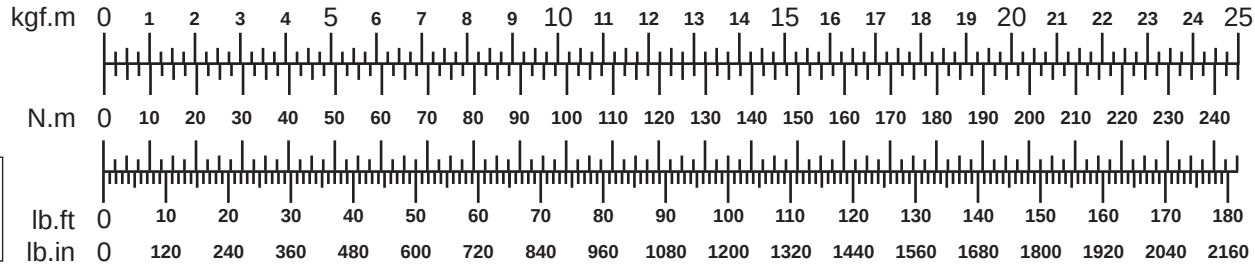

BI ND email: info@kingdicktool.com www.kingdicktool.com

# LIVE LINE

AB @kingdicktool.com www.kingdicktool.com




6

KING DICK TOOLS

# LIVE LINE

The **KING DICK** range of insulated tools is designed for electrical live line working, and manufactured in accordance with the DIN EN 60900 and IEC 900 standards.

Made for current carrying work (as per VDE 0680) to a maximum of 1000volt a.c. and 1500volt d.c., random checks and controls are made throughout the manufacturing process to ensure that stringent standards are maintained. And, of course, the tools inside the insulation are normal **KING DICK** high quality products.




1000 V

KING DICK

# OPEN END WRENCHES



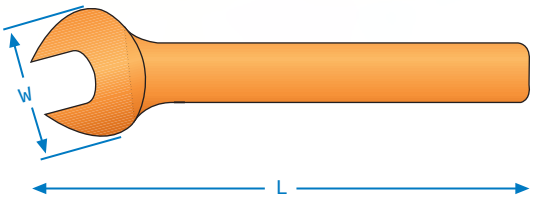


AF

AF

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSOA 608 | 1/4 | 30 | 125 | 70 |
| INSOA 610 | 5/16 | 30 | 125 | 70 |
| INSOA 612 | 3/8 | 30 | 125 | 70 |
| INSOA 613 | 7/16 | 30 | 125 | 73 |
| INSOA 614 | 1/2 | 37 | 145 | 80 |
| INSOA 618 | 9/16 | 37 | 145 | 80 |
| INSOA 619 | 5/8 | 43 | 170 | 122 |
| INSOA 620 | 11/16 | 43 | 170 | 122 |
| INSOA 624 | 3/4 | 48 | 185 | 135 |
| INSOA 628 | 7/8 | 53 | 200 | 200 |
| INSOA 630 | 1 | 60 | 205 | 245 |

WHIT.

W

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSOW 602 | 1/8 | 30 | 125 | 50 |
| INSOW 603 | 3/16 | 30 | 125 | 50 |
| INSOW 604 | 1/4 | 37 | 145 | 78 |
| INSOW 605 | 5/16 | 39 | 150 | 87 |
| INSOW 606 | 3/8 | 43 | 170 | 120 |
| INSOW 607 | 7/16 | 53 | 200 | 170 |
| INSOW 608 | 1/2 | 53 | 200 | 215 |
| INSOW 609 | 9/16 | 60 | 205 | 275 |
| INSOW 610 | 5/8 | 65 | 215 | 305 |
| INSOW 611 | 11/16 | 70 | 240 | 335 |
| INSOW 612 | 3/4 | 70 | 240 | 397 |

METRIC


M

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INS 006 | 6 | 19 | 105 | 27 |
| INS 007 | 7 | 19 | 105 | 27 |
| INS 008 | 8 | 19 | 105 | 31 |
| INS 009 | 9 | 30 | 125 | 47 |
| INS 010 | 10 | 30 | 125 | 47 |
| INS 011 | 11 | 30 | 125 | 48 |
| INS 012 | 12 | 37 | 145 | 78 |
| INS 013 | 13 | 37 | 145 | 78 |
| INS 014 | 14 | 39 | 150 | 93 |
| INS 015 | 15 | 39 | 150 | 94 |
| INS 016 | 16 | 39 | 170 | 94 |
| INS 017 | 17 | 43 | 170 | 120 |
| INS 018 | 18 | 43 | 175 | 120 |
| INS 019 | 19 | 48 | 185 | 170 |
| INS 020 | 20 | 48 | 185 | 170 |
| INS 021 | 21 | 53 | 200 | 170 |
| INS 022 | 22 | 53 | 200 | 170 |
| INS 023 | 23 | 53 | 200 | 215 |
| INS 024 | 24 | 53 | 200 | 215 |
| INS 025 | 25 | 53 | 200 | 215 |
| INS 026 | 26 | 53 | 200 | 215 |
| INS 027 | 27 | 70 | 240 | 310 |
| INS 028 | 28 | 70 | 240 | 310 |
| INS 030 | 30 | 70 | 240 | 310 |
| INS 032 | 32 | 70 | 240 | 310 |

## NEVER

**Strike an insulated tool.**

Damage to the insulating layer will occur, rendering the tool potentially dangerous and therefore useless.

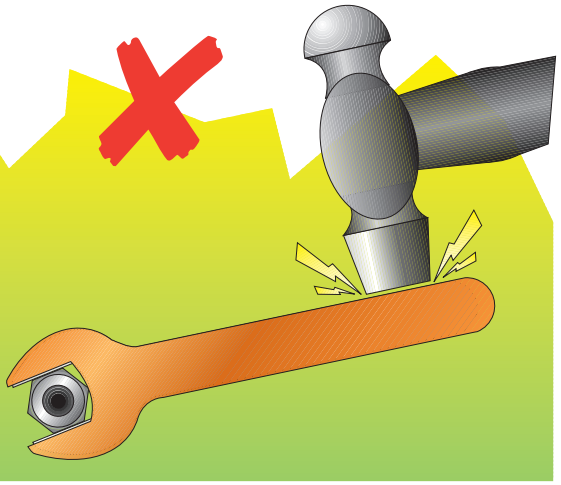

# 3/8” DRIVE SOCKETS






METRIC

M

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSMSM 206 | 6 | 22 | 33 | 28 |
| INSMSM 207 | 7 | 22 | 33 | 30 |
| INSMSM 208 | 8 | 22 | 33 | 28 |
| INSMSM 209 | 9 | 22 | 33 | 30 |
| INSMSM 210 | 10 | 22 | 33 | 29 |
| INSMSM 211 | 11 | 22 | 33 | 29 |
| INSMSM 212 | 12 | 22 | 33 | 40 |
| INSMSM 213 | 13 | 22 | 33 | 36 |
| INSMSM 214 | 14 | 22 | 33 | 32 |
| INSMSM 215 | 15 | 22 | 33 | 40 |
| INSMSM 216 | 16 | 24 | 33 | 42 |
| INSMSM 217 | 17 | 24 | 33 | 53 |
| INSMSM 218 | 18 | 27 | 33 | 54 |
| INSMSM 219 | 19 | 27 | 33 | 60 |
| INSMSM 220 | 20 | 29 | 33 | 70 |
| INSMSM 221 | 21 | 30 | 33 | 80 |
| INSMSM 222 | 22 | 32 | 33 | 86 |

AF

AF

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSMSA 208 | 1/4 | 22 | 33 | 30 |
| INSMSA 210 | 5/16 | 22 | 33 | 30 |
| INSMSA 212 | 3/8 | 22 | 33 | 30 |
| INSMSA 214 | 7/16 | 22 | 33 | 30 |
| INSMSA 216 | 1/2 | 25 | 33 | 36 |
| INSMSA 218 | 9/16 | 25 | 33 | 30 |
| INSMSA 220 | 5/8 | 25 | 33 | 42 |
| INSMSA 222 | 11/16 | 25 | 33 | 54 |
| INSMSA 224 | 3/4 | 28 | 33 | 66 |
| INSMSA 226 | 13/16 | 29 | 33 | 72 |
| INSMSA 228 | 7/8 | 32 | 33 | 78 |

WHIT.

W

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSMSW 202 | 1/8 | 16 | 33 | 30 |
| INSMSW 203 | 3/16 | 20 | 33 | 30 |
| INSMSW 204 | 1/4 | 24 | 33 | 36 |
| INSMSW 205 | 5/16 | 24 | 33 | 39 |
| INSMSW 206 | 3/8 | 27 | 33 | 60 |
| INSMSW 207 | 7/16 | 30 | 33 | 80 |
| INSMSW 208 | 1/2 | 32 | 33 | 88 |

# ACCESSORIES 3/8” & 1/2”DRIVE

| | | | |
|---|---|---|---|
| INSSES 2065 | 5” Extension | | 210 |
| INSSES 20610 | 10” Extension | | 400 |
| INSRPS 206 | 3/8” Drive Ratchet | 175 | 250 |

| | | | |
|---|---|---|---|
| INSSES 2085 | 5” Extension | | 210 |
| INSSES 20810 | 10” Extension | | 400 |
| INSRPS 408 | 1/2” Drive Ratchet | 250 | 480 |

# 1/2” DRIVE SOCKETS

AF

**AF**

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSHSA 212 | 3/8 | 19 | 50 | 67 |
| INSHSA 214 | 7/16 | 21 | 50 | 70 |
| INSHSA 216 | 1/2 | 23 | 50 | 70 |
| INSHSA 218 | 9/16 | 23 | 50 | 73 |
| INSHSA 220 | 5/8 | 27 | 52 | 74 |
| INSHSA 222 | 11/16 | 28 | 52 | 85 |
| INSHSA 224 | 3/4 | 32 | 52 | 90 |
| INSHSA 226 | 13/16 | 33 | 52 | 120 |
| INSHSA 228 | 7/8 | 35 | 52 | 126 |
| INSHSA 230 | 15/16 | 36 | 52 | 130 |
| INSHSA 232 | 1 | 37 | 52 | 158 |
| INSHSA 234 | $1^{1}/_{16}$ | 40 | 55 | 205 |
| INSHSA 236 | $1^{1}/_{8}$ | 41 | 52 | 207 |
| INSHSA 238 | $1^{3}/_{16}$ | 44 | 60 | 210 |
| INSHSA 240 | $1^{1}/_{4}$ | 47 | 52 | 215 |

WHIT.

**W**

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSHSW 202 | 1/8 | 17 | 50 | 62 |
| INSHSW 203 | 3/16 | 21 | 50 | 66 |
| INSHSW 204 | 1/4 | 24 | 50 | 70 |
| INSHSW 205 | 5/16 | 27 | 50 | 75 |
| INSHSW 206 | 3/8 | 29 | 50 | 82 |
| INSHSW 207 | 7/16 | 33 | 52 | 105 |
| INSHSW 208 | 1/2 | 35 | 52 | 130 |
| INSHSW 209 | 9/16 | 38 | 52 | 160 |
| INSHSW 210 | 5/8 | 41 | 57 | 165 |
| INSHSW 211 | 11/16 | 44 | 58 | 180 |
| INSHSW 212 | 3/4 | 48 | 53 | 215 |


**CAUTION!**
Always use correct Live Line accessories

METRIC

**M**

| PART No. | SIZE | W mm | L mm | g |
|---|---|---|---|---|
| INSHSM 208 | 8 | 17 | 50 | 65 |
| INSHSM 209 | 9 | 17 | 50 | 66 |
| INSHSM 210 | 10 | 18 | 50 | 67 |
| INSHSM 211 | 11 | 18 | 50 | 67 |
| INSHSM 212 | 12 | 21 | 50 | 68 |
| INSHSM 213 | 13 | 23 | 50 | 68 |
| INSHSM 214 | 14 | 23 | 50 | 70 |
| INSHSM 215 | 15 | 27 | 50 | 73 |
| INSHSM 216 | 16 | 27 | 50 | 74 |
| INSHSM 217 | 17 | 28 | 50 | 75 |
| INSHSM 218 | 18 | 29 | 50 | 85 |
| INSHSM 219 | 19 | 30 | 50 | 90 |
| INSHSM 220 | 20 | 32 | 52 | 108 |
| INSHSM 221 | 21 | 33 | 52 | 120 |
| INSHSM 222 | 22 | 34 | 53 | 124 |
| INSHSM 223 | 23 | 35 | 54 | 126 |
| INSHSM 224 | 24 | 35 | 55 | 130 |
| INSHSM 225 | 25 | 36 | 56 | 140 |
| INSHSM 226 | 26 | 38 | 57 | 158 |
| INSHSM 227 | 27 | 41 | 52 | 205 |
| INSHSM 228 | 28 | 41 | 59 | 205 |
| INSHSM 230 | 30 | 44 | 59 | 210 |
| INSHSM 232 | 32 | 48 | 61 | 215 |

## CAUTION

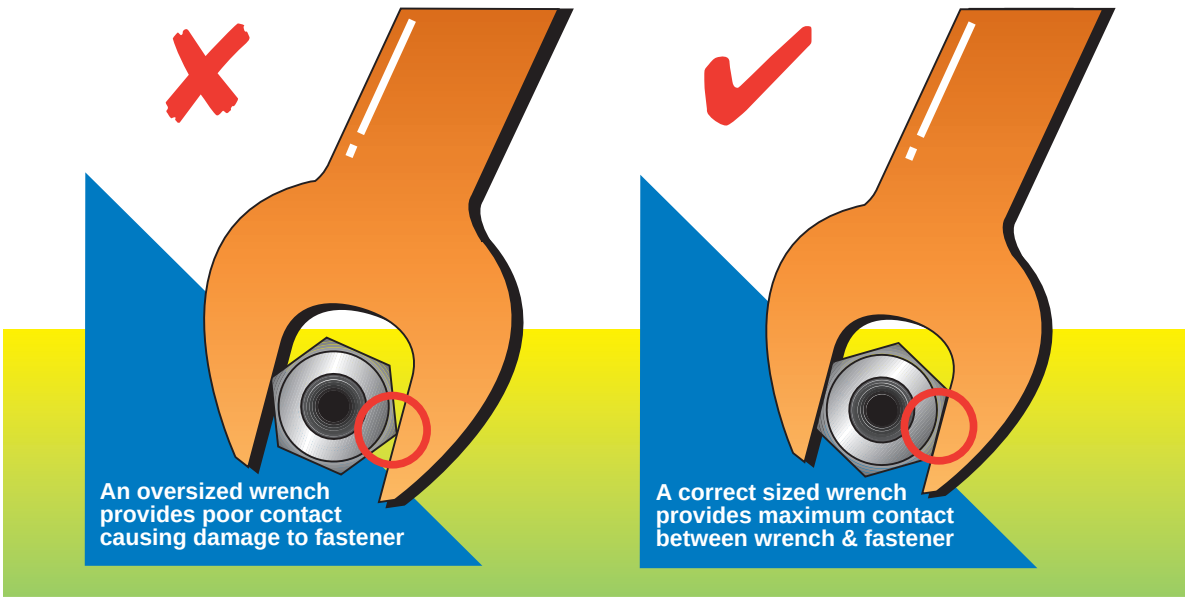

# ENGINEERS TOOLS






| PART No. | Description | L mm | g |
|---|---|---|---|
| **INSSAW 300** | 12” Hacksaw | 480 | 685 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| **INSSAW 150** | 6” Hacksaw | 270 | 145 |




| PART No. | Description | L mm | g |
|---|---|---|---|
| **INSCJK** | Cable Jointers Knife | 175 | 120 |


**CAUTION!**
Always treat knives and cutting tools with respect



| PART No. | Description | L mm | g |
|---|---|---|---|
| **INSIM** | Inspection Mirror | 172 | 120 |

# PLIERS






**CAUTION!**
Always use protective eyewear when using cutters

| PART No. | Description | L mm | g |
|---|---|---|---|
| KDP 180V | Combination | 180 | 250 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| KDP 205V | Combination | 205 | 330 |


| PART No. | Description | L mm | g |
|---|---|---|---|
| LNP 170V | Long Nose | 170 | 140 |
| LNP 205V | Long Nose | 205 | 170 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| LNPF 160V | Long Nose (flat) | 160 | 120 |
| LNPB 205V | Long Nose (bent) | 205 | 170 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| DCP 160V | Diagonal Cutting | 160 | 180 |
| DCP 180V | Diagonal Cutting | 180 | 220 |

| PART No. | Description | L mm | g |
|---|---|---|---|
| DCP 200V | Diagonal Cutting | 200 | 280 |


# CAUTION

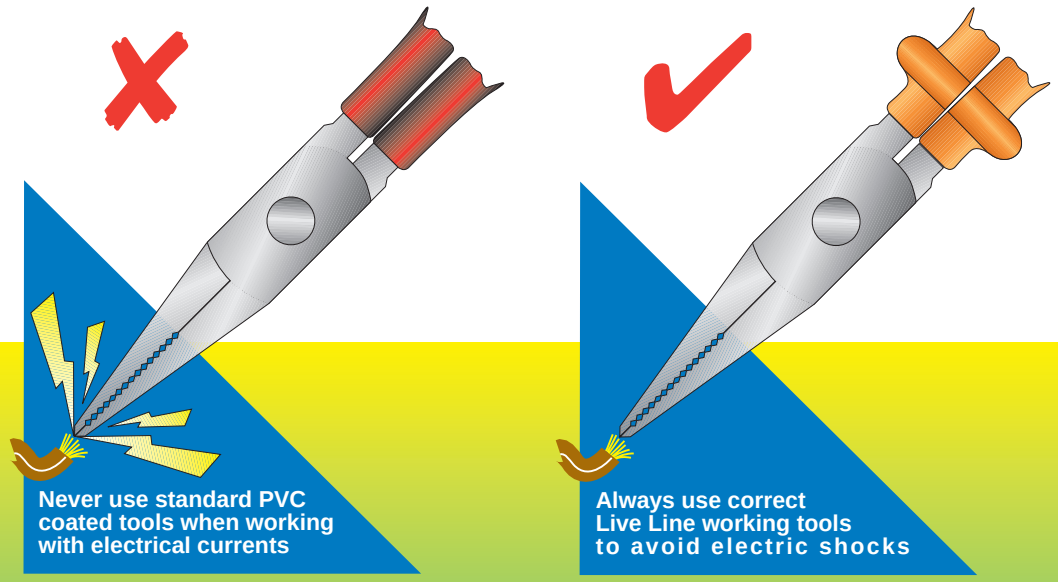

# SCREWDRIVERS




Comply with testing regulations according to DIN EN 60900, VDE 0680, part 201 as well as to IEC 900. This range is designed for current carrying work as per VDE 0680 up to a maximum of 1000Volt a.c., 1500Volt d.c.

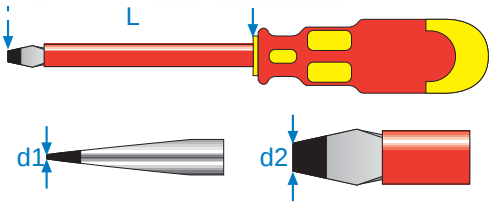


## SLOTTED VDE

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 22470 | 0.4 | 2.5 | 75 |
| 22471 | 0.5 | 3 | 75 |
| 22472 | 0.5 | 3 | 100 |
| 22473 | 0.6 | 3.5 | 100 |
| 22474 | 0.8 | 4 | 100 |

| PART No. | d1 mm | d2 mm | L mm |
|---|---|---|---|
| 22475 | 1.0 | 5.5 | 125 |
| 22476 | 1.2 | 6.5 | 150 |
| 22477 | 1.2 | 8 | 175 |
| 22478 | 1.6 | 10 | 200 |


## PHILLIPS VDE

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 22360 | PH-0 | 3 | 60 |
| 22361 | PH-1 | 4.5 | 80 |
| 22362 | PH-2 | 6 | 100 |
| 22363 | PH-3 | 8 | 150 |

## POZI-DRIVE VDE

| PART No. | d1 | d2 mm | L mm |
|---|---|---|---|
| 22380 | PZ-0 | 3 | 60 |
| 22381 | PZ-1 | 4.5 | 80 |
| 22382 | PZ-2 | 6 | 100 |
| 22383 | PZ-3 | 8 | 150 |

# CAUTION

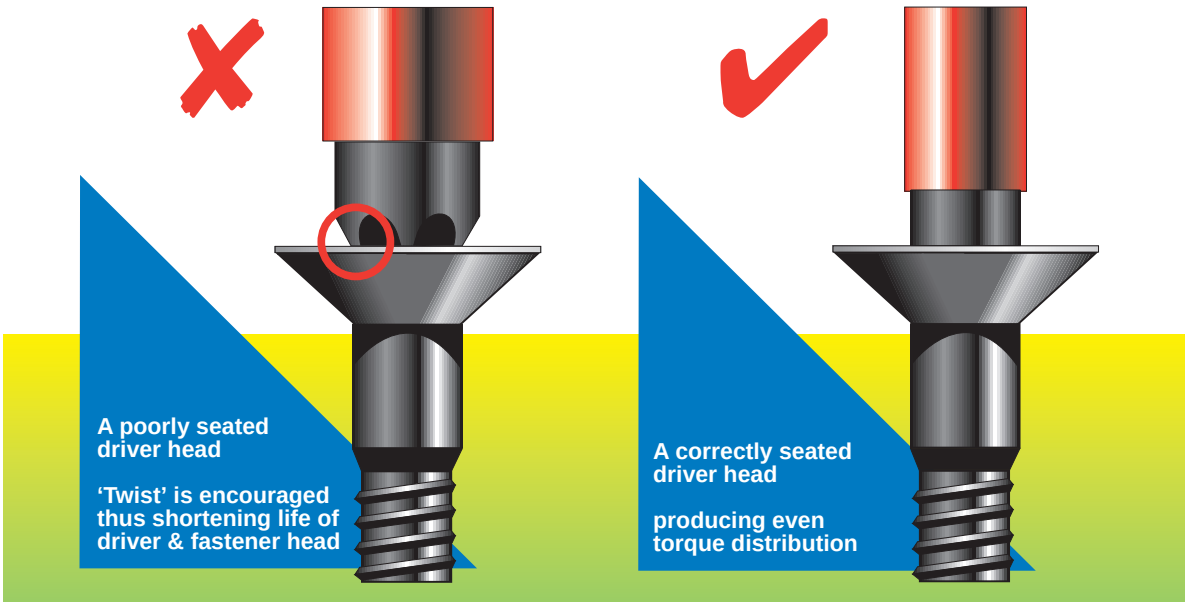




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

ABI ENGLAND email:info@kingdicktool.com www.kingdicktool.com



# ENGINEERS TOOLS

ABI

7

KING DICK TOOLS

# ENGINEERS

**KING DICK** high quality standards, reflected throughout the product range, are illustrated further with the range of ancillary products for industrial use.

All the hammers, keys and cutting tools in this section utilise the same formula of high grade materials, processed through exacting measures and rigorously checked and proven at each operation.




KING DICK

# HAMMERS






## BALL PEIN HICKORY HANDLE

| PART No. | Weight oz | Weight g |
|---|---|---|
| HBP 1004 | 4 | 110 |
| HBP 1008 | 8 | 225 |
| HBP 1012 | 12 | 340 |

| PART No. | Weight oz | Weight g |
|---|---|---|
| HBP 1016 | 16 | 450 |
| HBP 1024 | 24 | 675 |
| HBP 1032 | 32 | 900 |




## CLAW HICKORY HANDLE

| PART No. | Weight oz | Weight g |
|---|---|---|
| HCW 1016 | 16 | 450 |
| HCW 1024 | 20 | 560 |

**CAUTION!**
Protective eyewear is essential whenever striking is involved





## CLAW SOLID STEEL HANDLE

| PART No. | Weight oz | Weight g |
|---|---|---|
| HCSS 1016 | 16 | 450 |
| HCSS 1024 | 20 | 560 |

## CLAW TUBULAR STEEL HANDLE

| PART No. | Weight oz | Weight g |
|---|---|---|
| HCS 1016 | 16 | 450 |
| HCS 1024 | 20 | 560 |

# HAMMERS




## DEAD BLOW TUBULAR STEEL HANDLE

| PART No. | Weight oz | Weight g |
|---|---|---|
| DBH 1008 | 8 | 225 |
| DBH 1016 | 16 | 450 |
| DBH 1024 | 24 | 675 |
| DBH 1032 | 32 | 900 |
| DBH 1036 | 36 | 1000 |

## DEAD BLOW POLYCARBON/FIBRE HANDLE


| PART No. | Weight oz | Weight g |
|---|---|---|
| DBHF 1028 | 28 | 800 |
| DBHF 1036 | 36 | 1000 |
| DBHF 1044 | 44 | 1225 |

# WHAT A BLOW

The **Dead Blow** hammer head is filled with hundreds of small ball bearings:

On the up-stroke the bearings travel to the top of the hammer-

On the down-stroke the bearings travel to the striking head creating a solid, powerful blow which virtually eliminates any rebound.

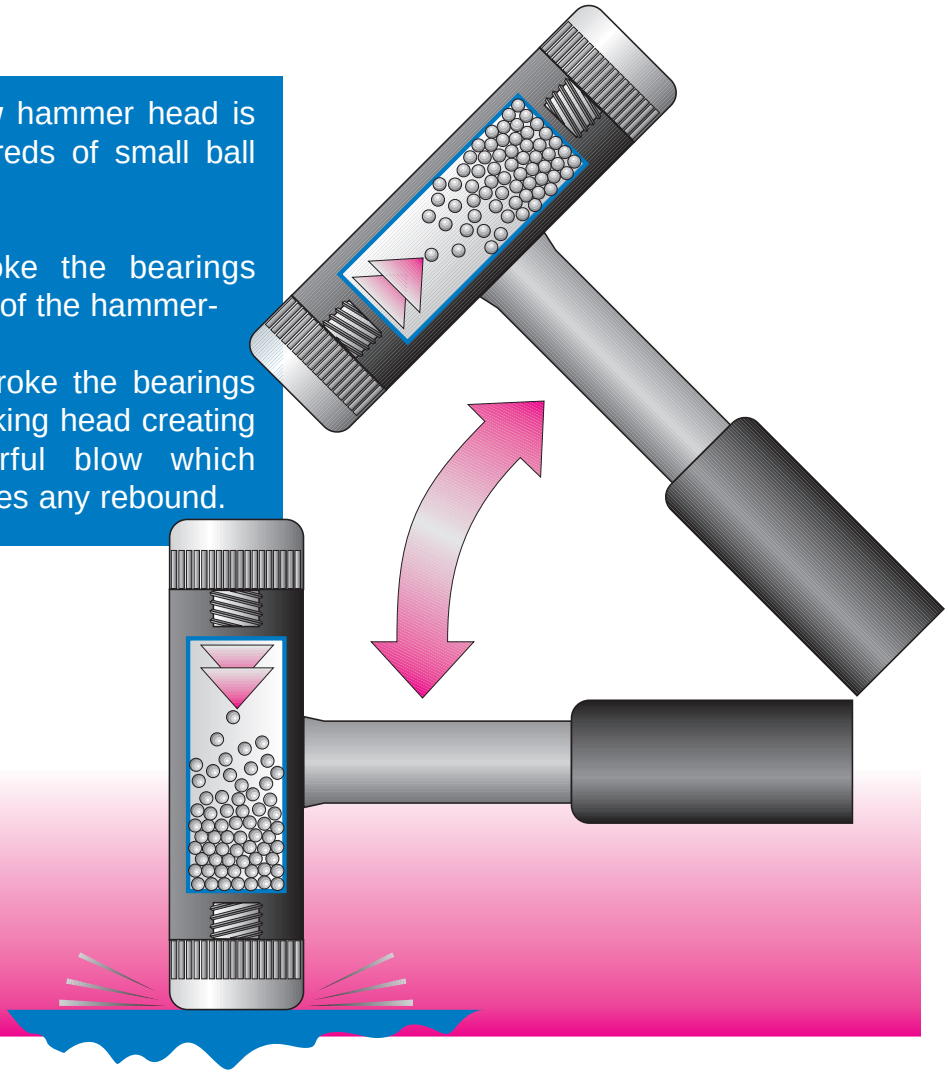




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# HEX & TORX WRENCHES





With a **Ball Ended** Hex key a working range of up to 15° off vertical can be achieved, thus making light work of hard to reach fixings.

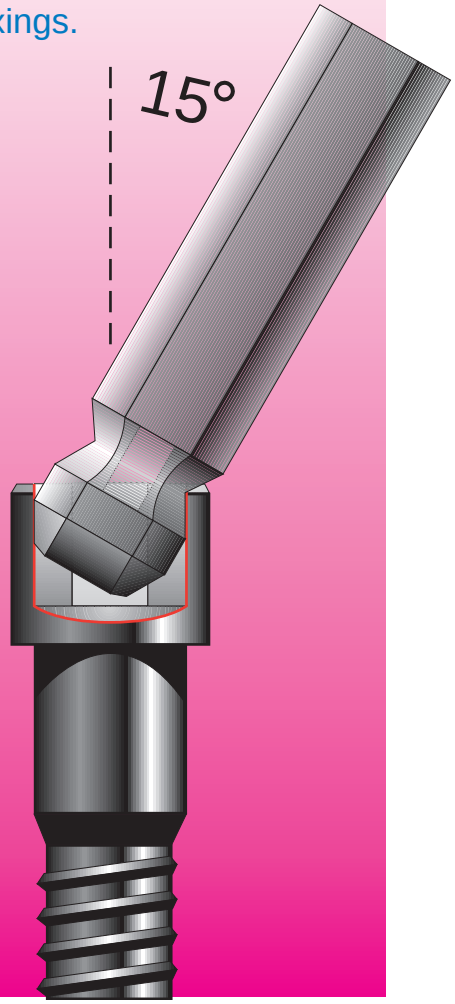


## HEXAGON WRENCH SETS

| PART No. | Description | g |
|---|---|---|
| HWA 100 | 10 piece AF, walleted | 260 |
| HWA 200 | 8 piece AF, walleted285 | |
| HWAL 208 | 8 piece AF, Long | 430 |
| HWAB 207 | 7 piece AF, Long Ball End | 250 |
| HWM 150 | 9 piece Metric, walleted | 250 |
| HWM 250 | 8 piece Metric, boxed | 295 |
| HWML 208 | 8 piece Metric, Long | 430 |
| HWMB 209 | 9 piece Metric, Long Ball End | 380 |

## TORX WRENCHES

| PART No. | Description | g |
|---|---|---|
| TKX 25 | T25 Bit | 30 |
| TKX 30 | T30 Bit | 30 |
| TKX 40 | T40 Bit | 30 |
| TKX 45 | T45 Bit | 30 |
| TKX 50 | T50 Bit | 30 |
| TKX 55 | T55 Bit | 30 |






## TORX WRENCH SETS

| PART No. | Description | g |
|---|---|---|
| TKX 2555 | T25 - T50 | 160 |
| TXW 209 | 9 piece, T10 - T50 | 130 |
| TXWA 209 | 9 piece, Anti-Tamper, T10 - T50 | 130 |

# CUTTING TOOLS





## HACKSAW FRAME WITH BLADE

| PART No. | Size | g |
|---|---|---|
| SAW 300 | 12” | 600 |

| PART No. | Size | g |
|---|---|---|
| SAW 150 | 6” | 200 |






## SAFETY KNIVES METAL, HEAVY DUTY

| PART No. | Description | W mm | L mm | g |
|---|---|---|---|---|
| KMR 105 | Retractable (5 Blades) | 35 | 155 | 190 |
| KMA 105 | Auto Retract (5 Blades) | 37 | 170 | 200 |
| KMB 205 | Replacement Blades (100 off) | | | |
| KMB 210 | Replacement Blades (10 off) | | | |

## SAFETY KNIVES PLASTIC, BREAKAWAY

| PART No. | Description | W mm | L mm | g |
|---|---|---|---|---|
| KPR 118 | Autolock, 18mm Blade | 42 | 162 | 100 |
| KPR 109 | Autolock, 9mm Blade | 23 | 142 | 50 |
| KPR 209 | Replacement Blades, 9mm (10off) dispenser | | | |
| KPR 218 | Replacement Blades, 18mm (10off) dispenser | | | |

# PIPE WRENCHES

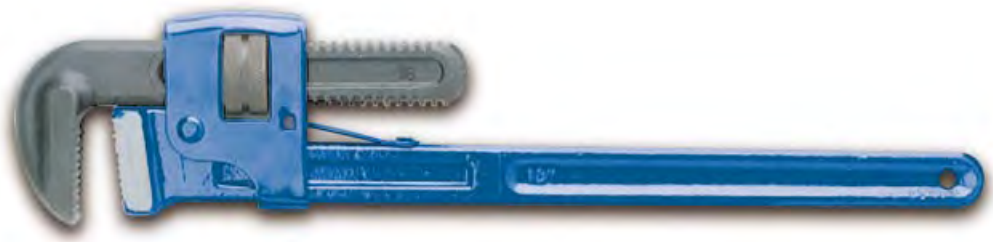

## PIPE WRENCHES STILLSON TYPE

| PART No. | Size ins | L mm | Capacity mm | g |
|---|---|---|---|---|
| SPW 208 | 8 | 200 | 27 | 300 |
| SPW 210 | 10 | 250 | 34 | 600 |
| SPW 212 | 12 | 300 | 42 | 750 |
| SPW 214 | 14 | 350 | 49 | 1,100 |
| SPW 218 | 18 | 450 | 60 | 1,750 |

ABI KING DICK LTD, Rotherham, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com



# CATALOG

## STORAGE

ABI KING DICK LTD, Rotherham, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

8

KING DICK TOOLS

# STORAGE

**KING DICK** tool storage units are manufactured using high grade materials to exacting quality standards and incorporate many security and safety features.

With our comprehensive range offering anything from a nylon hold-all to workshop roller cabinets we can offer practical, secure and efficient tool organisation to suit the individuals requirements.



**KING DICK** storage systems are available with many innovative drawer partitioning solutions to maximise space.

KING DICK

# TOOL BAG

## TOOL BAG

| PART No. | Description | g |
|---|---|---|
| FTB 01 | Fabric Carrying Bag | 550 |



# TOOL CASES

2 Pallet
Aluminium Case





2 Pallet
ABS Plastic & Aluminium Case



Heavy Duty
Injection Moulded Case


## TOOL CASES

| PART No. | Type | Dimensions mm | Kg |
|---|---|---|---|
| PTC 160 | Blue Case | 430 x 340 x 160 | 3 |
| PTC 170L | 2 pallet | 440 x 340 x 180 | 4 |
| PTC 170SS | 2 pallet PSS | 422 x 327 x 185 | 5.5 |
| PTC 170R | 2 pallet ALU | 474 x 355 x 180 | 5.8 |


# TOOL BOXES

## PLASTIC TOOL BOXES


| PART No. | Size | Dimensions mm | Kg |
|---|---|---|---|
| PTB 16 | 16” | 410 x 225 x 185 | 1.5 |
| PTB 19 | 19” | 485 x 260 x 230 | 2.5 |
| PTB 22 | 22” | 560 x 260 x 230 | 3 |



Heavy Duty
Plastic Hinges



Removable
Tote Tray



Removable
Compact Storage Trays






Heavy Duty
Plastic Lid Clasps

## BARN TOOL BOXES


| PART No. | Size | Dimensions mm | Kg |
|---|---|---|---|
| BTB 14T | 14” | 355 x 205 x 180 | 3.2 |
| BTB 19T | 19” | 480 x 205 x 180 | 4.1 |
| BTB 24T | 24” | 610 x 205 x 180 | 5.1 |



Removable
Tote Tray



Full Length
Piano Hinged Lid



Folded Corners
for Safety




## CANTILEVER TOOL BOXES


| PART No. | Size | Dimensions mm | Kg |
|---|---|---|---|
| CB 163 | 16” 3 Tray | 400 x 200 x 150 | 3 |
| CB 165 | 16” 5 Tray | 400 x 200 x 200 | 4 |
| CB 183 | 18” 3 Tray | 450 x 200 x 150 | 4.2 |
| CB 185 | 18” 5 Tray | 450 x 200 x 200 | 5.5 |
| CB 213 | 21” 3 Tray | 530 x 200 x 150 | 4.8 |
| CB 215 | 21” 5 Tray | 530 x 200 x 200 | 6.9 |



Full Length
Piano Hinged Lid



Wide Opening
Cantilever Trays



Folded Corners
for Safety






ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# TOOL CHESTS






Double Skinned
Steel Construction




Security Lock




Rounded Edges
for Safety






Non Slip
Rubber Drawer Liners



Heavy Duty
Carrying Handles



Smooth Running
Ball Bearing Drawer Slides



3 Drawer Add On Chest

## TOOL CHESTS

| PART No. | Description | Dimensions mm | Kg |
|---|---|---|---|
| **STC 06** | 6 Drawer Steel Top Chest | 660 x 349 x 412 | 31 |
| **STC 10** | 10 Drawer Steel Top Chest | 660 x 349 x 501 | 34.6 |
| **STC 12** | 12 Drawer Steel Top Chest | 660 x 349 x 501 | 34.6 |
| **STC 03** | 3 Drawer 'Add on' Top Chest | 660 x 349 x 260 | 17.2 |

# ROLLER CABINETS





## ROLLER CABINETS

| PART No. | Description | Dimensions mm | Kg |
|---|---|---|---|
| SRC 3C | 3 Drawer & Compartment | 676 x 454 x 762 | 41.4 |
| SRC 6C | 6 Drawer & Compartment | 676 x 454 x 939 | 56.6 |
| SRC 6 | 6 Drawer | 676 x 454 x 762 | 52 |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

ABI KING DICK Unit 11 Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

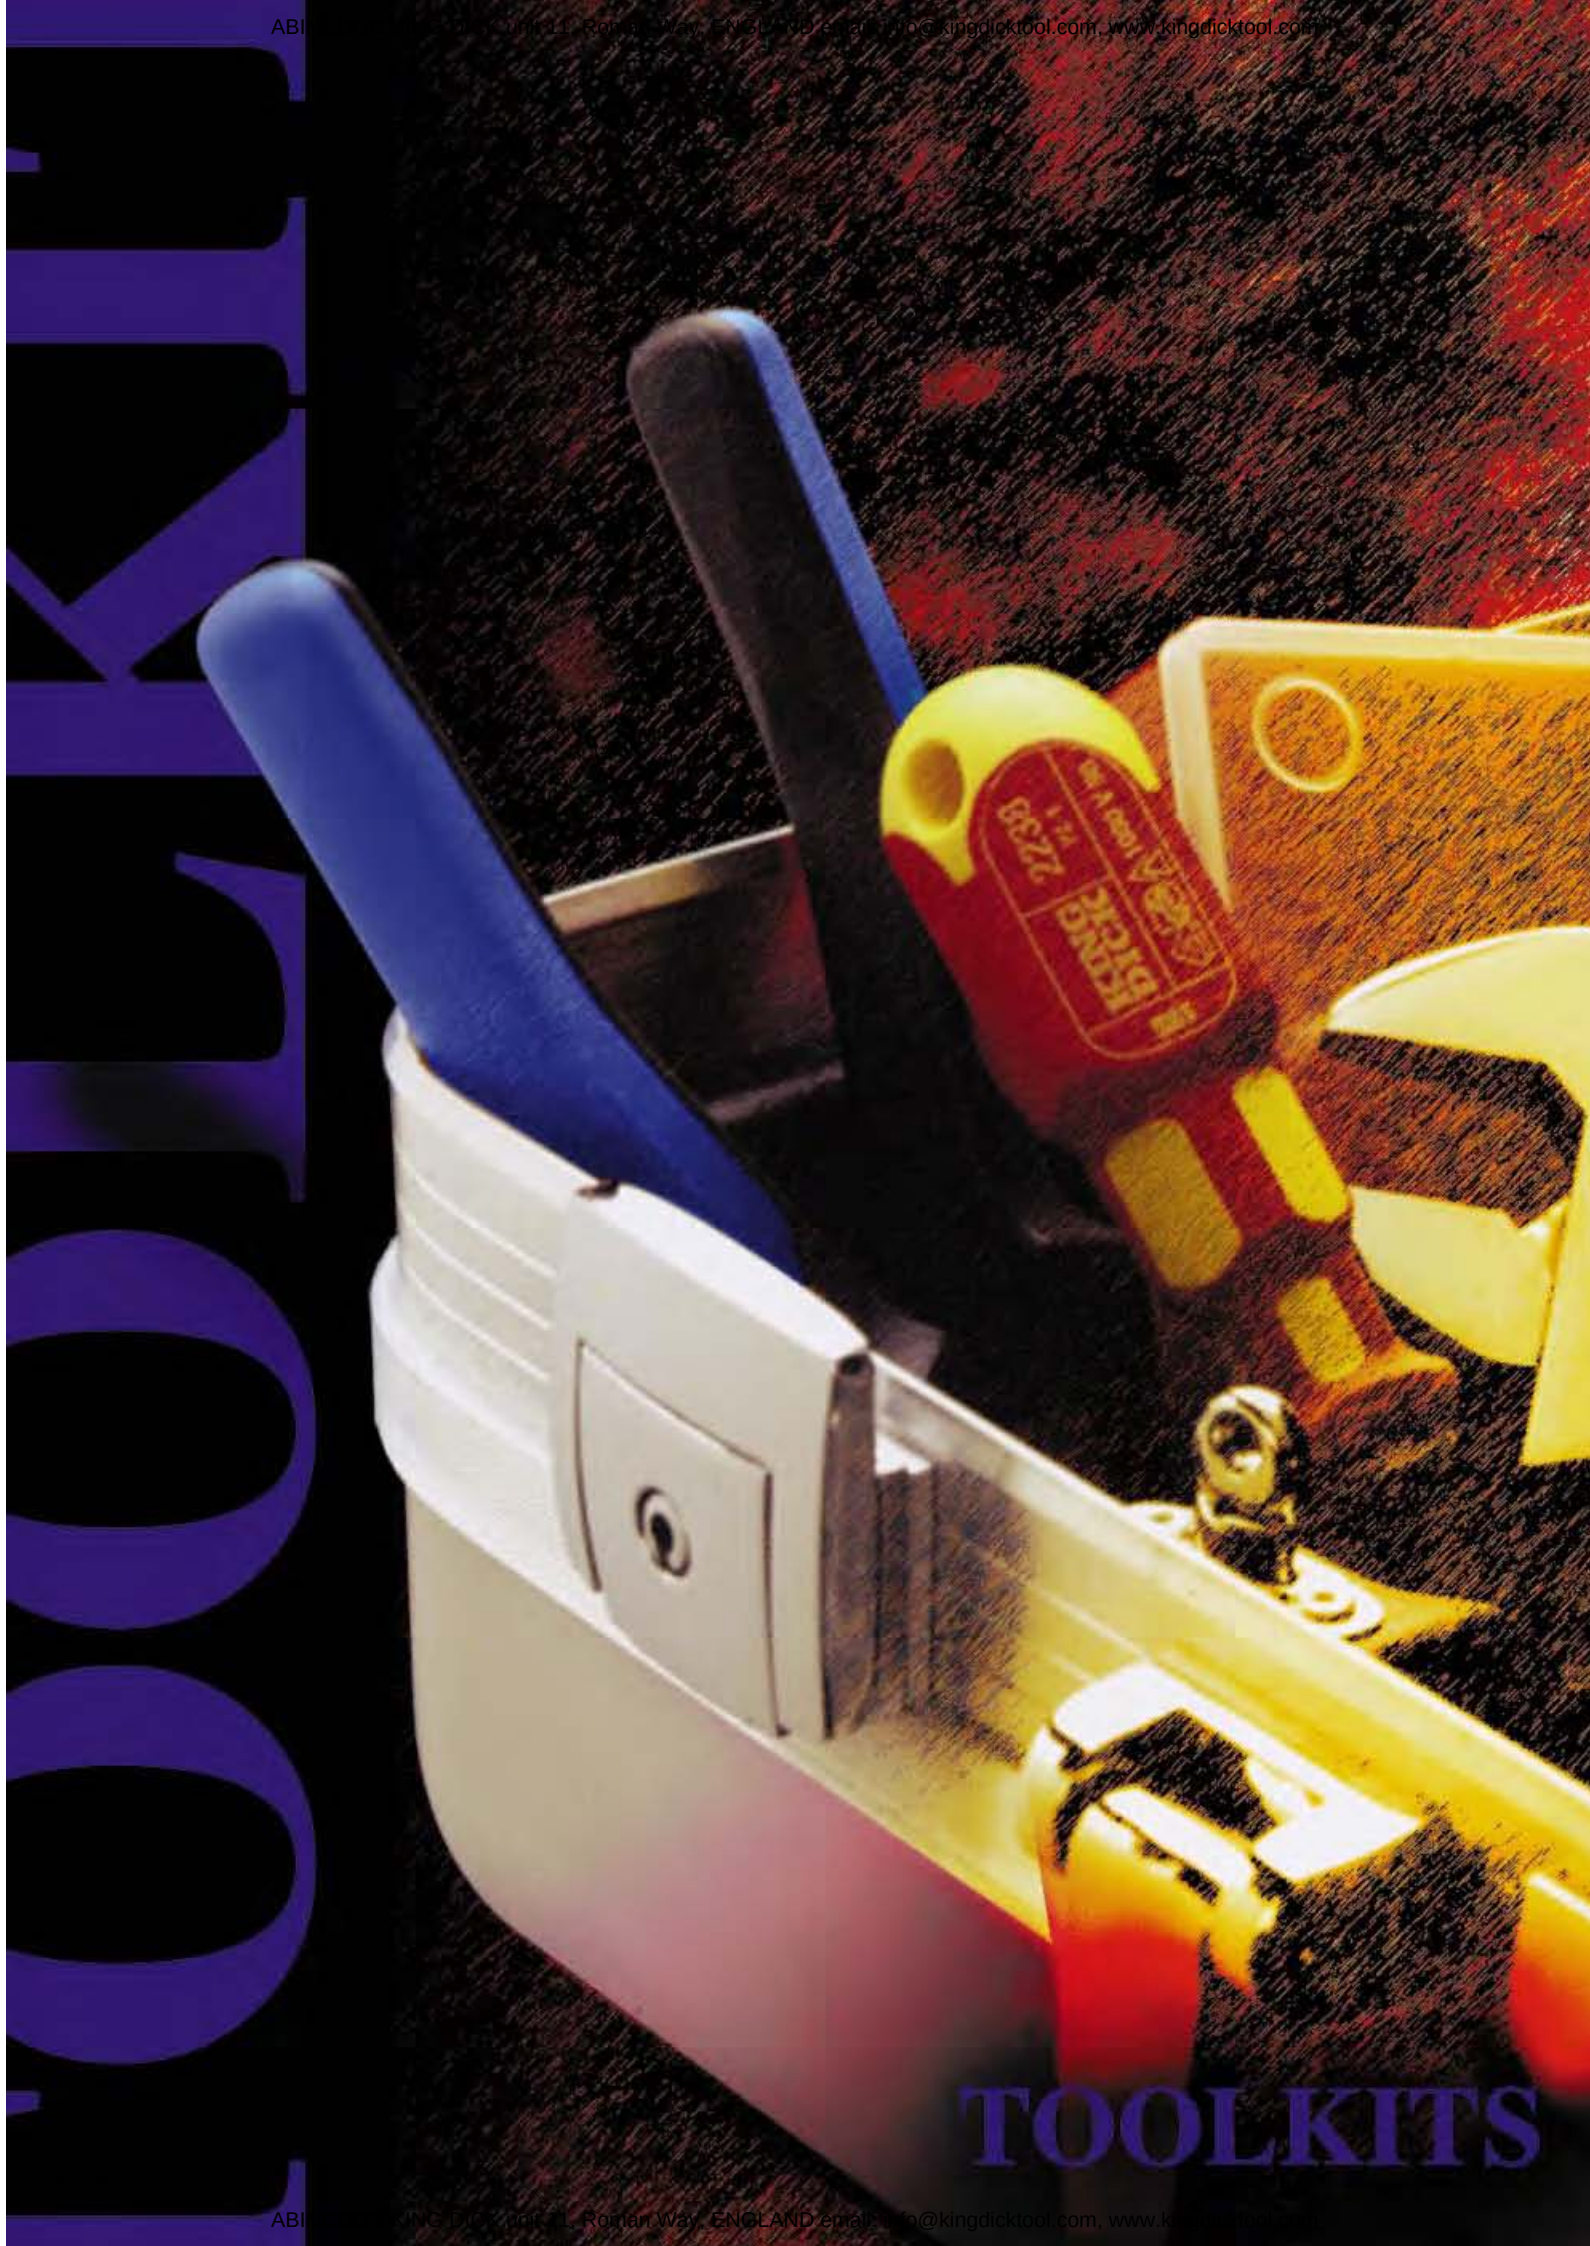


ABI KING DICK Unit 11 Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com



9

KING DICK TOOLS

# TOOL KITS

**KING DICK** tool kits offer an extensive range dedicated to the professional user. Designed to meet the individuals requirements our high quality tools are available in many preset formats covering engineering, electrical and live line working fields, all with scope for further additions to create a personal and unique tool kit.



**KING DICK** also provide a made to measure tool kit service, to meet your specific requirements.

KING DICK

# FITTERS SERVICE KITS



| Fitters Service Kits Basic Contents | | g |
|---|---|---|
| **RPS 408** | Reversible Ratchet | 434 |
| **SSD 210** | Sliding Tee Bar | 386 |
| **SNS 208** | Jointed Nut Spinner | 427 |
| **SES 208M** | Extension Bar | 179 |
| **SES 208L** | Extension Bar | 352 |
| **USS 208** | Universal Joint | 156 |
| **SBS 208** | Speeder Brace | 556 |
| **HSS 214** | 14mm Spark Plug Socket | 145 |



| | | |
|---|---|---|
| **Tool Box** | Enamel Steel Cantilever<br>450 x 200 x 200 | 5.5kg |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1005** | **1/2" Square Drive** |
| **Metric** | 8 - 27mm Sockets (Total 8) |
| | 8 - 27mm Ring Spanners (Total 4) |
| | 8 - 27mm Double O/E Spanners (Total 4) |
| **24 Piece** | **11Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1006** | **1/2" Square Drive** |
| **A/F** | 7/16 - 7/8 Sockets (Total 8) |
| | 7/16 - 7/8 Ring Spanners (Total 4) |
| | 7/16 - 7/8 Double O/E Spanners (Total 4) |
| **24 Piece** | **10Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1007** | **1/2" Square Drive** |
| **Whitworth** | 1/8 - 9/16 Sockets (Total 8) |
| | 1/8 - 9/16 Ring Spanners (Total 4) |
| | 1/8 - 9/16 Double O/E Spanners (Total 4) |
| **24 Piece** | **11Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1008** | **1/2" Square Drive** |
| **Metric & A/F** | 8 - 27mm Sockets (Total 8) |
| | 7/16 - 7/8 Sockets (Total 8) |
| | 8 - 27mm Ring Spanners (Total 4) |
| | 7/16 - 7/8 Ring Spanners (Total 4) |
| | 8 - 27mm Double O/E Spanners (Total 4) |
| | 7/16 - 7/8 Double O/E Spanners (Total 4) |
| **40 Piece** | **13Kg** |

# INDUSTRIAL SERVICE KITS



## Industrial Service Kits Basic Contents

Electricians Screwdriver (4" Blade)
Engineers Screwdriver (4" Blade)
Engineers Screwdriver (6" Blade)
Engineers Screwdriver (12" Blade)
Phillips Screwdriver (No.1)
Phillips Screwdriver (No.2)
Phillips Screwdriver (No.3)
Stillson Pipe Wrench (10")
Hacksaw, Pistol Handle
Hammer (1lb)
Hammer (2lb)
Plastic Head Mallet
Tin Snips (7")
Diagonal Cutting Pliers (6½")
Slip Joint Pliers (7½")
Snipe Nose Pliers (5½")
Combination Pliers (8")
Centre Punch (5" 2off)
Pin Drift (3/16")
Pin Drift (1/4")
Pin Drift (3/8")
Cold Chisel (7/16")
Cold Chisel (1")
Pillar Rough File (6")
Flat Smooth File (8")
Half Round File (10")
Steel Top Chest STC06

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1000** | |
| **Metric** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | **3/4SD** 36 - 55mm Sockets (Total 5) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | Feeler Gauge (metric) |
| **98 Piece** | **52Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1001** | |
| **A/F** | **1/4SD** 3/16 - 3/8 Sockets (Total 7) |
| | **1/2SD** 3/8 - 1¼ Sockets (Total 14) |
| | **3/4SD** 15/16 - 2" Sockets (Total 12) |
| | 3/8 - 1⁵/₁₆ Ring Spanners (Total 7) |
| | 3/16 - 11/32 Mianature Wrenches (Total 3) |
| | 3/8 - 1⁵/₁₆ Double O/E Spanners (Total 7) |
| | 1/16 - 3/8" Hex Wrenches (Total 10) |
| | Feeler Gauge (ins.) |
| **113 Piece** | **52Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1002** | |
| **Whitworth** | **1/4SD** 0 - 6BA Sockets (Total 7) |
| | **1/2SD** 1/8 - 3/4 Sockets (Total 11) |
| | **3/4SD** 3/4 - 1¼ Sockets (Total 7) |
| | 1/8 - 1" Ring Spanners (Total 6) |
| | 0 - 10BA Mianature Wrenches (Total 6) |
| | 1/8 - 1" Double O/E Spanners (Total 6) |
| | 1/16 - 3/8" Hex Wrenches (Total 10) |
| | Feeler Gauge (ins.) |
| **114 Piece** | **52Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1003** | |
| **Metric & A/F** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | 3/16 - 3/8 Sockets (Total 7) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | 3/8 - 1¼ Sockets (Total 14) |
| | **3/4SD** 36/55mm Sockets (Total 5) |
| | 15/16 - 2" Sockets (Total 12) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 3/8 - 1⁵/₁₆ Ring Spanners (Total 7) |
| | 3/16 - 11/32 Miniature Wrenches (Total 3) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 3/8 - 1⁵/₁₆ Double O/E Spanners (Total 7) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | 1/16 - 3/8 Hex Wrenches (Total 10) |
| | Feeler Gauge (metric) |
| | Feeler Gauge (ins.) |
| **159 Piece** | **61Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1004** | |
| **A/F & Whit** | **1/4SD** 3/16 - 3/8AF Sockets (Total 7) |
| | 0 - 6BA Sockets (Total 7) |
| | **1/2SD** 3/8 - 1¼AF Sockets (Total 14) |
| | 1/8 - 3/4W Sockets (Total 11) |
| | **3/4SD** 15/16 - 2"AF Sockets (Total 12) |
| | 3/4 - 1¼W Sockets (Total 7) |
| | 3/8 - 1⁵/₁₆AF Ring Spanners (Total 7) |
| | 1/8 - 1"W Ring Spanners (Total 6) |
| | 3/16 - 11/32 Miniature Wrenches (Total 3) |
| | 0 - 10BA Miniature Wrenches (Total 6) |
| | 3/8 - 1⁵/₁₆AF Double O/E Spanners (Total 7) |
| | 1/8 - 1"W Double O/E Spanners (Total 6) |
| | 1/16 - 3/8 Hex Wrenches (Total 10) |
| | Feeler Gauge (ins.) |
| **155 Piece** | **62Kg** |



ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# PROFESSIONAL SERVICE KITS



## Professional Fitters Service Kits Basic Contents

| | |
|---|---|
| | **1/4" Square Drive** |
| **RPS 204** | Reversible Ratchet |
| **SSD 204** | Sliding Tee Bar |
| **SNS 204** | Jointed Nut Spinner |
| **SES 203** | Extension |
| **SES 204** | Extension |
| **SGH 204** | Spinner Handle |
| **SFC 204** | Flexible Extension |
| **USS 204** | Universal Joint |
| | **3/8" Square Drive** |
| **RPS 206** | Reversible Ratchet |
| **SSD 207** | Sliding Tee Bar |
| **SNS 207** | Nut Spinner |
| **SES 206M** | Extension |
| **SES 206L** | Extension |
| **USS 206** | Universal Joint |
| **SAC 206** | Converter 3/8" Drive x 1/2" Square Plug |
| **SBS 205** | Speed Brace |
| | **1/2" Square Drive** |
| **RPS 408** | Reversible Ratchet |
| **SSD 210** | Sliding Tee Bar |
| **SNS 208** | Jointed Nut Spinner |
| **SES 208S** | Extension |
| **SES 208M** | Extension |
| **SES 208L** | Extension |
| **SES 208X** | Extension |
| **USS 208** | Universal Joint |
| **SAC 208** | Converter 1/2" Drive x 3/4" Square Plug |
| **SBS 208** | Speed Brace |
| **SRS 912** | Stud Extractor |
| **HSS 214** | 14mm Spark Plug Socket |
| **STC 06** | Steel Top Chest |

| | |
|---|---|
| | **3/4" Square Drive** |
| **PTD 212** | Reversible Ratchet (Heavy Duty) |
| **SSD 212** | Sliding Tee Bar |
| **SES 212M** | Extension |
| | |
| **KST 2044** | Torque Wrench (70 - 300Nm) |
| | Electricians Screwdriver (4" Blade) |
| | Engineers Screwdriver (4" Blade) |
| | Engineers Screwdriver (6" Blade) |
| | Engineers Screwdriver (12" Blade) |
| | Phillips Screwdriver (No.1) |
| | Phillips Screwdriver (No.2) |
| | Phillips Screwdriver (No.3) |
| | Stillson Pipe Wrench (10") |
| | Hacksaw, Pistol Handle |
| | Hammer (1lb) |
| | Hammer (2lb) |
| | Plastic Head Mallet |
| | Tin Snips (7") |
| | Diagonal Cutting Pliers (6½") |
| | Slip Joint Pliers (7½") |
| | Snipe Nose Pliers (5½") |
| | Combination Pliers (8") |
| | Centre Punch (5" 2off) |
| | Pin Drift (3/16") |
| | Pin Drift (1/4") |
| | Pin Drift (3/8") |
| | Cold Chisel (7/16") |
| | Cold Chisel (1") |
| | Pillar Rough File (6") |
| | Flat Smooth File (8") |
| | Half Round File (10") |

# PROFESSIONAL SERVICE KITS

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1009** | |
| **Metric** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | **3/8SD** 8 - 19mm Sockets (Total 7) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | **3/4SD** 36 - 55mm Sockets (Total 5) |
| | 8 - 21mm Combination Spanners (Total 8) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | Cutting Knife |
| | Junior Hacksaw |
| | Feeler Gauge (Metric) |
| **121 Piece** | **55Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1010** | |
| **A/F** | **1/4SD** 3/16 - 3/8 Sockets (Total 7) |
| | **3/8SD** 1/4 - 3/4 Sockets (Total 7) |
| | **1/2SD** 3/8 - 1¼ Sockets (Total 14) |
| | **3/4SD** 15/16 - 2" Sockets (Total 12) |
| | 1/4 - 7/8 Combination Spanners (Total 8) |
| | 3/8 - 15/16 Ring Spanners (Total 7) |
| | 3/8 - 15/16 Double O/E Spanners (Total 7) |
| | 3/16 - 11/32 Miniature Wrenches (Total 3) |
| | 1/16 - 3/8 Hex Wrenches (Total 10) |
| | Cutting Knife |
| | Junior Hacksaw |
| | Feeler Gauge (ins.) |
| **136 Piece** | **55Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1011** | |
| **Whitworth** | **1/4SD** 0 - 6BA Sockets (Total 7) |
| | **3/8SD** 1/8 - 1/2 Sockets (Total 7) |
| | **1/2SD** 1/8 - 3/4 Sockets (Total 11) |
| | **3/4SD** 3/4 - 1¼ Sockets (Total 7) |
| | 1/4 - 3/4 Combination Spanners (Total 8) |
| | 1/8 - 1" Ring Spanners (Total 6) |
| | 1/8 - 1" Double O/E Spanners (Total 6) |
| | 0 - 10BA Miniature Wrenches (Total 6) |
| | 1/16 - 3/8 Hex Wrenches (Total 10) |
| | Cutting Knife |
| | Feeler Gauge (ins.) |
| **137 Piece** | **56Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1012** | |
| **Metric & A/F** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | **3/8SD** 1/4 - 3/4AF Sockets (Total 7) |
| | **3/8SD** 8 - 19mm Sockets (Total 7) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | **3/4SD** 36 - 55mm Sockets (Total 5) |
| | 8 - 21mm Combination Spanners (Total 8) |
| | 1/4 - 7/8AF Combination Spanners (Total 8) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | Cutting Knife |
| | Junior Hacksaw |
| | Feeler Gauge (metric) |
| **197 Piece** | **65Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1013** | |
| **Metric, A/F & Whitworth** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | **3/8SD** 1/4 - 3/4AF Sockets (Total 7) |
| | **3/8SD** 1/8 - 1/2W Sockets (Total 7) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | **3/4SD** 36 - 55mm Sockets (Total 5) |
| | 1/4 - 7/8AF Combination Spanners (Total 8) |
| | 1/4 - 3/4W Combination Spanners (Total 8) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | Cutting Knife |
| | Junior Hacksaw |
| | Feeler Gauge (metric) |
| **193 Piece** | **67Kg** |

| KIT No. | Basic Kit *Plus* : |
|---|---|
| **TKU 1014** | |
| **Metric, A/F & Whitworth** | **1/4SD** 4 - 10mm Sockets (Total 6) |
| | **3/8SD** 8 - 19mm Sockets (Total 7) |
| | **3/8SD** 1/4 - 3/4AF Sockets (Total 7) |
| | **3/8SD** 1/8 - 1/2W Sockets (Total 7) |
| | **1/2SD** 8 - 32mm Sockets (Total 10) |
| | **3/4SD** 36 - 55mm Sockets (Total 5) |
| | 8 - 21mm Combination Spanners (Total 8) |
| | 1/4 - 7/8AF Combination Spanners (Total 8) |
| | 1/4 - 3/4W Combination Spanners (Total 8) |
| | 5.5 - 41mm Ring Spanners (Total 7) |
| | 4 - 41mm Double O/E Spanners (Total 8) |
| | 1.5 - 10mm Hex Wrenches (Total 9) |
| | Cutting Knife |
| | Junior Hacksaw |
| | Feeler Gauge (metric) |
| **212 Piece** | **67Kg** |

# ELECTRICIANS SERVICE KITS





| KIT No. | Starter Kit: |
|---|---|
| **TKUE01** | |
| | Ball Pein Hammer (8oz) |
| | Adjustable Wrench (6”) |
| | Junior Hacksaw |
| | VDE Wire Strippers (150mm) |
| | VDE Diagonal Cutter (160mm) |
| | Combination Pliers (160mm) |
| | Long Nose Pliers (160mm) |
| | Wire Strippers (160mm) |
| | Diagonal Cutters (160mm) |
| | 22470 VDE Screwdriver |
| | 22474 VDE Screwdriver |
| | 22475 VDE Screwdriver |
| | 22476 VDE Screwdriver |
| | 22361 VDE Screwdriver |
| | 22362 VDE Screwdriver |
| | 40100 Voltage Tester |
| | PTB16 Toolbox |
| **16 Piece** | **20Kg** |




| KIT No. | Professional Kit: |
|---|---|
| **TKUE02** | |
| | Ball Pein Hammer (8oz) |
| | Adjustable Wrench (6”) |
| | Junior Hacksaw |
| | VDE Wire Strippers (150mm) |
| | VDE Diagonal Cutter (160mm) |
| | Combination Pliers (160mm) |
| | Long Nose Pliers (160mm) |
| | Wire Strippers (160mm) |
| | Diagonal Cutters (160mm) |
| | VDE Long Nose Pliers (200mm) |
| | VDE Combination Pliers (160mm) |
| | Long Nose Pliers (205mm) |
| | Slip Joint Pliers (240mm) |
| | Cable Cutters (200mm) |
| | Cutting Knife, Snap Off |
| | 10 - 19mm Combination Spanners (Total 7) |
| | HWM250 Hex Wrench Set (metric) |
| | 22470 VDE Screwdriver |
| | 22474 VDE Screwdriver |
| | 22475 VDE Screwdriver |
| | 22476 VDE Screwdriver |
| | 22361 VDE Screwdriver |
| | 22362 VDE Screwdriver |
| | 40100 Voltage Tester |
| | 21350 Phillips Screwdriver (No.0) |
| | 21351 Phillips Screwdriver (No.1) |
| | 21352 Phillips Screwdriver (No.2) |
| | 21353 Phillips Screwdriver (No.3) |
| | 21450 Flat Screwdriver |
| | 21451 Flat Screwdriver |
| | 21452 Flat Screwdriver |
| | 21453 Flat Screwdriver |
| | 21454 Flat Screwdriver |
| | 21121 Flat Screwdriver |
| | 21123 Flat Screwdriver |
| | 21125 Flat Screwdriver |
| | 1/4”SD 3/16 - 1/2”AF Sockets (Total 9) |
| | RPS204 1/4”SD Reversible Ratchet |
| | SSD204 Sliding Tee Bar |
| | SGH204 Spinner Handle |
| | SES204 Extension |
| | USS204 Universal Joint |
| | PTB 22 Toolbox |
| **42 Piece** | **53Kg** |

# NUT & BOLT SIZE CONVERSION CHART

| Nut Sizes Across Flats | | | British Sizes | | | Unified Sizes | | American Sizes | |
|---|---|---|---|---|---|---|---|---|---|
| ins | mm | AF ins | BA | BS ins | W ins | Nor ins | Hvy ins | SAE ins | USS ins |
| .187 | | 3/16 | | | | | | 2.3 | |
| .193 | | | 6 | | | | | | |
| .197 | 5 | | | | | | | | |
| .217 | 5.5 | | | | | | | | |
| .220 | | | 5 | | | | | | |
| .236 | 6 | | | | | | | | |
| .248 | | | 4 | | | | | 4 | |
| .250 | | 1/4 | | | | | | | |
| .276 | 7 | | | | | | | | |
| .282 | | | 3 | | | | | | |
| .312 | | 5/16 | | | | 10B | | 5.6 | 1/8 |
| .316 | 8 | | | | | 6.8N | | | |
| .324 | | | 2 | | | | | | |
| .340 | | | | 3/16 | 1/8 | | | | |
| .343 | | 11/32 | | | | 8N | | 8 | |
| .354 | 9 | | | | | | | | |
| .365 | | | 1 | | | | | | |
| .375 | | 3/8 | | | | 10N | | 10 | |
| .394 | 10 | | | | | 3/16 | | | |
| .412 | | | 0 | | | | | | |
| .433 | 11 | | | | | | | | |
| .437 | | 7/16 | | | | 1/4 | | 1/4 | |
| .445 | | | | 1/4 | 3/16 | | | | |
| .472 | 12 | | | | | | | | |
| .500 | | 1/2 | | | | 5/16 | 1/4 | 5/16 | 1/4 |
| .512 | 13 | | | | | | | | |
| .525 | | | | 5/16 | 1/4 | | | | |
| .551 | 14 | | | | | | | | |
| .562 | | 9/16 | | | | 3/8 | 5/16 | 3/8 | 5/16 |
| .590 | 15 | | | | | | | | |
| .600 | | | | 3/8 | 5/16 | | | | |
| .625 | | 5/8 | | | | 7/16B | | 7/16 | |
| .629 | 16 | | | | | | | | |
| .669 | 17 | | | | | | | | |
| .687 | | 11/16 | | | | 7/16N | 3/8 | | 3/8 |
| .708 | 18 | | | | | | | | |
| .710 | | | | 7/16 | 3/8 | | | | |
| .748 | 19 | | | | | | | | |
| .750 | | 3/4 | | | | 1/2 | 7/16 | 1/2 | 7/16 |
| .787 | 20 | | | | | | | | |
| .812 | | 13/16 | | | | 9/16B | | | |
| .820 | | | | 1/2 | 7/16 | | | | |
| .826 | 21 | | | | | | | | |
| .866 | 22 | | | | | | | | |
| .875 | | 7/8 | | | | 9/16N | 1/2 | 9/16 | 1/2 |
| .905 | 23 | | | | | | | | |
| .920 | | | | 9/16 | 1/2 | | | | |
| .937 | | 15/16 | | | | 5/8 | 9/16 | 5/8 | 9/16 |
| .944 | 24 | | | | | | | | |
| .984 | 25 | | | | | | | | |
| 1.000 | | 1 | | | | | | 11/16 | |
| 1.010 | | | | 5/8 | 9/16 | | | | |
| 1.023 | 26 | | | | | | | | |
| 1.062 | 27 | 1 1/16 | | | | | 5/8 | 3/4 | 5/8 |
| 1.100 | | | | 11/16 | 5/8 | | | | |
| 1.102 | 28 | | | | | | | | |
| 1.125 | | 1 1/8 | | | | 3/4 | | | |
| 1.141 | 29 | | | | | | | | |
| 1.181 | 30 | | | | | | | | |
| 1.200 | | | | 3/4 | 11/16 | | | | |
| 1.220 | 31 | | | | | | | | |
| 1.250 | | 1 1/4 | | | | | 3/4 | 7/8 | 3/4 |
| 1.259 | 32 | | | | | | | | |
| 1.300 | 33 | | | 7/8 | 3/4 | | | | |
| 1.312 | | 1 5/16 | | | | 7/8 | | | |
| 1.375 | 35 | 1 3/8 | | | | | | | |
| 1.390 | | | | 15/16 | 13/16 | | | | |
| 1.417 | 36 | | | | | | | | |
| 1.437 | | 1 7/16 | | | | | 7/8 | 1 | 7/8 |
| 1.480 | | | | 1 | 7/8 | | | | |
| 1.495 | 38 | | | | | | | | |
| 1.500 | | 1 1/2 | | | | 1 | | | |
| 1.535 | 39 | | | | | | | | |
| 1.574 | 40 | | | | | | | | |
| 1.580 | | | | | 15/16 | | | | |
| 1.614 | 41 | | | | | | | | |

| Nut Sizes Across Flats | | | British Sizes | | Unified Sizes | | American Sizes | |
|---|---|---|---|---|---|---|---|---|
| ins | mm | AF ins | BS ins | W ins | Nor ins | Hvy ins | SAE ins | USS ins |
| 1.625 | | 1 5/8 | | | | 1 | 1 1/8 | 1 |
| 1.653 | 42 | | | | | | | |
| 1.671 | | | 1 1/8 | 1 | | | | |
| 1.687 | | 1 11/16 | | | 1 1/8 | | | |
| 1.772 | 45 | | | | | | | |
| 1.812 | 46 | 1 13/16 | | | | 1 1/8 | 1 1/4 | 1 1/8 |
| 1.860 | | | 1 1/4 | 1 1/8 | | | | |
| 1.875 | | 1 7/8 | | | 1 1/4 | | | |
| 1.969 | 50 | | | | | | | |
| 2.000 | | 2 | | | | 1 1/4 | 1 3/8 | 1 1/4 |
| 2.050 | 52 | | 1 3/8 | 1 1/4 | | | | |
| 2.062 | | 2 1/16 | | | 1 3/8 | | | |
| 2.165 | 55 | | | | | | | |
| 2.187 | | 2 3/16 | | | | 1 3/8 | 1 1/2 | 1 3/8 |
| 2.220 | | | 1 1/2 | 1 3/8 | | | | |
| 2.250 | | 2 1/4 | | | 1 1/2 | | | |
| 2.362 | 60 | | | | | | | |
| 2.375 | | 2 3/8 | | | | 1 1/2 | | 1 1/2 |
| 2.410 | | | 1 5/8 | 1 1/2 | | | | |
| 2.437 | | 2 7/16 | | | 1 5/8 | | 1 5/8 | |
| 2.562 | 65 | 2 9/16 | | | | 1 5/8 | | 1 5/8 |
| 2.580 | | | 1 3/4 | 1 5/8 | | | | |
| 2.625 | | 2 5/8 | | | 1 3/4 | | 1 3/4 | |
| 2.750 | | | | | | 1 3/4 | | 1 3/4 |
| 2.756 | 70 | | | | | | | |
| 2.760 | | | 2 | 1 3/4 | | | | |
| 2.812 | | 2 13/16 | | | 1 7/8 | | 1 7/8 | |
| 2.937 | | 2 15/16 | | | | 1 7/8 | | 1 7/8 |
| 2.953 | 75 | | | | | | | |
| 3.000 | | 3 | | | 2 | | 2 | |
| 3.125 | | 3 1/8 | | | | 2 | | 2 |
| 3.150 | 80 | | 2 1/4 | 2 | | | | |
| 3.346 | 85 | | | | | | | |
| 3.375 | | 3 3/8 | | | 2 1/4 | | 2 1/4 | |
| 3.500 | | 3 1/2 | | | | 2 1/4 | | 2 1/4 |
| 3.543 | 90 | | | | | | | |
| 3.550 | | | 2 1/2 | 2 1/4 | | | | |
| 3.740 | 95 | | | | | | | |
| 3.750 | | 3 3/4 | | | 2 1/2 | | 2 1/2 | |
| 3.875 | | | | | | 2 1/2 | | 2 1/2 |
| 3.890 | | | 2 3/4 | 2 1/2 | | | | |
| 3.937 | 100 | | | | | | | |
| 4.000 | | 4 | | | | | | |
| 4.015 | 102 | | | | | | | |
| 4.055 | 103 | | | | | | | |
| 4.062 | | 4 1/16 | | 2 5/8 | | | | |
| 4.125 | | 4 1/8 | | | | | | |
| 4.133 | 105 | | | | | | | |
| 4.187 | | 4 3/16 | 3 | 2 3/4 | | | | |
| 4.250 | 108 | 4 1/4 | | | | 2 3/4 | | 2 3/4 |
| 4.312 | | 4 5/16 | | | | | | |
| 4.330 | 110 | | | 2 7/8 | | | | |
| 4.375 | 111 | 4 3/8 | | | | | | |
| 4.437 | | 4 7/16 | | | | | | |
| 4.448 | 113 | | | | | | | |
| 4.500 | | 4 1/2 | | | | | | |
| 4.530 | 115 | | 3 1/4 | 3 | | | | |
| 4.562 | | 4 9/16 | | | | | | |
| 4.625 | | 4 5/8 | | | | 3 | | 3 |
| 4.724 | 120 | | | | | | | |
| 4.750 | | 4 3/4 | | | | | | |
| 4.842 | 123 | | | | | | | |
| 4.855 | | | 3 1/2 | 3 1/4 | | | | |
| 5.000 | 127 | 5 | | | | 3 1/4 | | 3 1/4 |
| 5.100 | | | | 3 3/8 | | | | |
| 5.118 | 130 | | | | | | | |
| 5.187 | | 5 3/16 | 3 3/4 | 3 1/2 | | | | |
| 5.314 | 135 | | | | | | | |
| 5.375 | | 5 3/8 | | | | 3 1/2 | | 3 1/2 |
| 5.562 | | 5 9/16 | 4 | 3 3/4 | | | | |
| 5.708 | 145 | | | | | | | |
| 5.750 | | 5 3/4 | | 3 7/8 | | 3 3/4 | | 3 3/4 |
| 5.875 | | 5 7/8 | | | | | | |
| 5.905 | 150 | | | | | | | |
| 5.944 | 151 | | | | | | | |
| 5.955 | | | 4 1/4 | 4 | | | | |
| 6.102 | 155 | | | | | | | |


B = Bolt N = Nut

## ISO METRIC HEXAGON SIZES For BS 3692 Nuts and BS 4190 Bolts

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Nominal size thread diameter | M | 1.6 | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 27 | 30 | 33 | 36 | 39 | 42 | 45 | 48 | 52 | 56 | 60 | 64 | 68 |
| Nominal size across flats | mm | 3.2 | 4 | 5 | 5.5 | 7 | 8 | 10 | 13 | 17 | 19 | 22 | 24 | 27 | 30 | 32 | 36 | 41 | 46 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |


# SCREW CONVERSION CHART

## SCREW SIZE

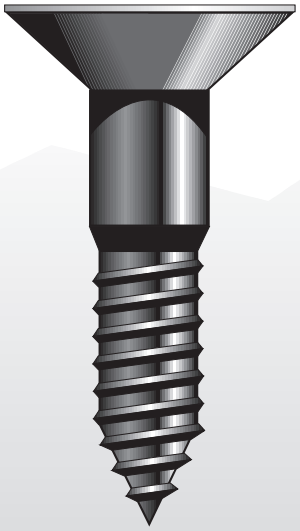

| mm | gauge |
|---|---|
| 1.6 | 1 |
| 1.6 | 1 |
| 2.0 | 2 |
| 2.5 | 4 |
| 3.0 | 6 |
| 3.5 | 6 |
| 4.5 | 8 |
| 5.5 | 10 |
| 5.5 | 12 |
| 6.0 | 14 & 16 |
| 7.0 | 18 & 20 |

## SCREWDRIVER SIZE

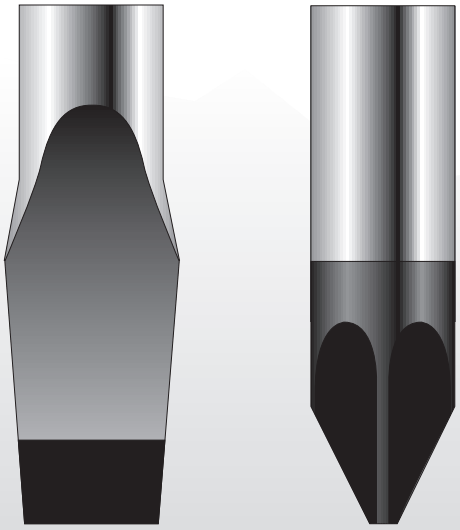

| slot (mm) | cross (No.) |
|---|---|
| 2.5 | 0 |
| 3.0 | 0 |
| 3.5 | 1 |
| 4.0 | 1 |
| 5.0 | 2 |
| 5.5 | 2 |
| 6.5 | 2 |
| 8.0 | 2 |
| 8.0 | 3 |
| 10.0 | 4 |
| 12.0 | 4 |

# INDEX

## WRENCHES


**11** Open End Wrenches
**12** Open End Wrench Sets
Miniature Open End Wrenches & Sets
**13** Ring Wrenches
**14** Ring Wrench Sets
**15** Combination Wrenches
**16** Combination Wrench Sets
**17** Combination Wrench Sets Cont.
Miniature Combination Wrench Sets
**18** Ratchet Combination Wrenches & Sets
**19** Open End Podgers
**20** Ring Podgers
**21** Ratchet Podgers
Adjustable Wrenches
**22** Adjustable Hook Wrenches
**23** Slogging Wrenches
**24** Single Open Ended Wrenches


## SOCKETRY


**27** 1/4” Drive-Standard & Deep (6 point)
**28** 1/4” Drive Accessories
**29** 1/4” Drive Socket Sets
3/8” Drive Sockets (6 point)
**30** 3/8” Drive-Standard & Deep (12 point)
**31** 3/8” Drive Adaptor, Bit, Plug Sockets
3/8” Inserted Hex & Torx Bits
**32** 3/8” Drive Accessories
**33** 3/8” Drive Socket Sets
1/2” Drive Sockets-Standard (12 point)
**34** 1/2” Drive-Standard & Deep (12 point)
**35** 1/2” Drive Sockets-Standard (6 point)
1/2” Drive Hex Adaptor, Plug Sockets
**36** 1/2” Drive Inserted Hex & Torx Bits
**37** 1/2” Drive Accessories
**38** 1/2” Drive Socket Sets
**39** 1/2” Drive Socket Sets Cont.
3/4” Drive Sockets-Standard (12 point)
**40** 3/4” Drive Accessories
3/4” Drive Socket Sets


## SOCKETRY Continued


**41** 1” Drive Sockets-Standard (12 point)
1” Drive Accessories
**42** 1” Drive Socket Sets
3/8” Drive Impact Sockets-Standard
**43** 3/8” Drive Impact Sockets-Deep
1/2” Drive Impact Sockets-Standard
**44** 1/2” Drive Impact-Standard & Deep
**45** 1/2” Drive-Deep Cont.
1/2” Drive Impact Accessories
**46** 3/4” Drive Impact Sockets-Standard
**47** 3/4” Drive Impact Sockets-Deep
**48** 3/4” Drive Impact Accessories
1” Drive Impact Sockets-Standard
**49** 1” Drive Impact-Standard & Deep
**50** 1” Drive Impact-Deep Cont.
1” Drive Impact Accessories


## SCREWDRIVERS


**53** SUPER 2000 - Slotted
Hex Slotted, Electricians Slotted
**54** SUPER 2000 - Phillips, Pozi-Drive
Hex Phillips, Pozi-Hex, Torx Drivers
**55** SUPER 2000 VDE - Slotted, Phillips
Pozi-Drive
**56** SUPER 2000 Screwdriver Sets
**57** ‘PROFI’ Range - Torx, Torx Anti-Tamper
Torx Ball Ended
**58** ‘PROFI’ Range - Ball Ended Hex Driver
Hex Driver/Bit Holder, Nut Spinners
**59** ‘PROFI’ Range - Slotted Electricians
Hex Slotted, Hex Phillips
**60** ‘PROFI’ Range - Stubby Slot & Phillips
Voltage Testers
**61** ‘PROFI’ Range - ‘T’ Handled:-
Hex Wrench, Torx Wrench, Nut Spinner
**62** ‘PROFI’ Range - Screwdriver Sets
Ratchet Screwdrivers




ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com

# INDEX

## PLIERS


**65** Industrial-Combination, Long Nose
Side Cutters
**66** Industrial-Cable Cutters, Wire Strippers
**67** Industrial-Int. & Ext. Circlip Pliers
**68** Wire Twisting Pliers
**69** Tin Shears, Slip Joint Pliers, Self Grip
**70** SUPER 2000-Combination, Long Nose
**71** SUPER 2000 - Side Cutters
Wire Strippers, Cable Cutters
**72** SUPER 2000 VDE - Combination
Long Nose
**73** SUPER 2000 VDE - Side Cutters
Wire Strippers, Cable Cutters
**74** Electronic Pliers
Plier Sets - SUPER 2000 & Industrial


## TORQUE WRENCHES


**77** 'S' Range, Industrial Range
Torque Multiplier
**78** Torque Conversion Scale


## LIVE LINE


**81** Open End Wrenches
**82** Ring Wrenches
**83** Adjustable Wrenches
**84** 3/8" Drive Sockets
3/8" & 1/2" Drive Accessories
**85** 1/2" Drive Sockets
**86** Hacksaws, Knives, Inspection Mirror
**87** Pliers -
Combination, Long Nose, Cutters
**88** Screwdrivers -
Slotted, Phillips, Pozi-Drive


## ENGINEERS TOOLS


**91** Hammers - Ball Pein, Claw
**92** Dead Blow Hammers
**93** Hex & Torx Wrenches
Hex & Torx Wrench Sets
**94** Hacksaws, Knives, Pipe Wrenches


## STORAGE


**97** Tool Bag, Tool Cases
**98** Tool Boxes - Plastic
Metal Barn & Cantilever
**99** Tool Chests
**100** Roller Cabinets


## TOOLKITS


**103** Fitter Service Kits
**104** Industrial Service Kits
**105** Professional Service Kits
**106** Professional Service Kits Cont.
**107** Electricians Service Kits

**108** Nut & Bot Conversion Chart
**109** Screw Size Conversion Chart

# TERMS AND CONDITIONS OF SALE

## 1. GENERAL

Unless otherwise expressly agreed in writing by a Director or authorised executive of the Company all goods are sold upon the following terms and conditions and no agent or representative of the Company has any authority to vary or omit these terms and conditions. Any terms and conditions printed on the buyer's order forms or in correspondence or elsewhere or implied by trade custom practice or course of dealing are binding only insofar as they are not at variance with these terms and conditions and they have been specifically agreed to in writing by a Director or authorised executive of the Company and any purported provisions to the contrary are hereby extinguished or excluded.

## 2. ACCEPTANCE OF ORDERS

**(a)** The Company's acceptance of the buyer's order shall be effective only where made in writing on the Company's acceptance of order form duly countersigned by a Director or authorised executive of the Company and no contract shall be concluded until such written confirmation is given.
**(b)** Orders which do not conform to the Company's standard box quantities wil be adjusted accordingly by the Company and in such event the buyer shall pay for the actual quantity delivered.

## 3. PRICES

**(a)** The prices payable for the goods shall be those contained in the Company's current price list at the time of despatch. The Company shall have the right at any time to withdraw any discount from its normal prices and/or to revise prices to take into account increases in costs prior to delivery including (without limitation) the costs of any goods, materials, carriage, labour or overheads, the increase or imposition of any tax duty or other levy and other variation in exchange rates.
**(b)** Unless otherwise specified prices are exclusive of packing, carriage, V.A.T. and any other tax or duties payable by the buyer.

## 4. DELIVERY

**(a)** The Company will use all reasonable endeavours to deliver at the time stated but delivery dates shall be regarded as estimates only and not of any contractual effect and the Company shall not be liable for any delay occasioned by any cause whatsoever beyond the Company's control.
**(b)** Goods shall be deemed to be delivered when they leave the premises of the Company.
**(c)** In the case of delivery of goods by instalments the buyer will not be entitled to treat the delivery of faulty goods in any one instalment or the late delivery or non-delivery of any one instalment as a repudiation of the whole contract.
**(d)** If the buyer fails to give delivery instructions within 14 days of being notified that the goods are ready for delivery the Company shall (without prejudice to any other rights or remedies available to it) be entitled (but not bound) to store the goods at any available place at the buyer's expense.
**(e)** Unless otherwise stated, goods will be consigned by goods train or road transport to the address in the United Kingdom specified by the buyer in writing.
**(f)** The costs of carriage and packaging (including cases and materials) will be charged to the buyer on the invoice for the goods at the time of dispatch. Packing cases and materials are non-returnable unless otherwise stated.

## 5. RISK AND TITLE TO GOODS

**(a)** The risk in the goods passes to the buyer upon delivery but property in the goods remains vested in the Company and shall only pass from the Company to the buyer upon full payment being made by the buyer of all sums due (in respect of the goods) on whatsoever account or grounds to the Company from the buyer. In the event of the goods being sold by the buyer in such a manner as to pass to a third party a valid title to the goods, whilst any such items are due as aforesaid, the buyer shall be the trustee for the Company of the proceeds in a separate bank account. The Company's rights under this sub-clause (a) shall attach to the proceeds of such a sale. Nothing herein shall constitute the buyer the agent of the Company for the purchase of any such sub-sale.
**(b)** The buyer agrees that prior to full payment being made as aforesaid the Company may at any time repossess the goods and enter upon the buyer's premesis and remove the goods therfrom (and dispose of the same in any manner it may decide) and that prior to such payment the buyer shall keep such goods as fiduciary agent and bailee and separate and identifiable for this purpose.
**(c)** In the event of the goods becoming constituents of or being converted into other products whilst sums are due as provided in sub-clause (a) hereof the Company shall have the ownership of and title to such other products (but not by way of a charge) as if they were the goods and accordingly this Clause 5 shall so far as appropriate apply to such other products subject to the buyer's right to the surplus of moneys realised by the said products in excess of those due to the Company as provided herein.
**(d)** Any implied authority that the buyer shall be entitled to sell the goods and pass property in the same to third parties in the normal course of its business or manufactture products out of the same or sell such products will continue until otherwise notified to the buyer by the Company or until the happening of any of the following events (whichever is the earlier):

**(i)** any notice to the buyer that an Administrative Receiver or other Receiver or Manager is to be or has been appointed in respect of its undertaking or a material part thereof or other property or assets;

**(ii)** any notice to the buyer that a petition to wind up the buyer is to be or has been presented to the buyer under Section 124 of the Insolvency Act 1986 or otherwise or any notice to the buyer of a proposal to pass a Resolution to wind up the buyer (including any proposal by the buyer to do so);

**(iii)** a decision by the buyer to make a voluntary arrangement or composition with its creditors or any notice to the buyer and/or any of its creditors that a proposal for the same is to be or has been made;

**(iv)** the buyer becoming unable to pay its debts as such expression is defined by the Insolvency Act 1986; or

**(v)** any notice to the buyer that it is to be the subject of a petition for an Administrative Order presented to the Courts or the making of an Administration Order in respect of the buyer;

and upon the happening of any such events the buyer shall immediately notify a Director or other authorised executive of the Company.
**(e)** On receipt of written notice from the Company or on the happening of any of the events set out in sub-clause (d) above the buyer's implied authority to sell the Company's goods shall be immediately withdrawn and all such goods and products made therefrom shall immediately be delivered to the Company.
**(f)** The buyer shall insure and keep insured goods to their full value against all normal commercial risks from the date of delivery of the goods and shall whenever requested by the Company produce a copy of the policy of insurance to the Company. Without prejudice to any other rights of the Company if the buyer fails to comply fully with the terms of this sub-clause all sums due on whatsoever account or grounds to the Company from the buyer shall become immediately due and payable.

## 6. NOTIFICATION OF LOSS OR DAMAGE

The Company must be informed in writing within three days of delivery of goods in the event of any shortage or damage and within seven days of receipt of invoice if the goods have not been delivered otherwise the goods shall be deemed to have been accepted by the buyer as being in good order and in conformity with the contract.

## 7. PAYMENT

**(a)** Unless otherwise stated payment is strictly net cash to be made in full without any deductions or set-off within 30 days of the date of invoice.
**(b)** Failure to make due payment in respect of deliveries or instalments under this or any other contract between the buyer and the Company shall entitle the Company to delay, suspend or cancel deliveries in whole or in part at its option.
**(c)** Any extension of credit allowed to the buyer may be changed or withdrawn at any time.
**(d)** If payment is not made in full by the due date stated on the invoice the Company reserves the right to charge interest to the buyer at the rate of 2% per annum above the base rate from time to time of the Royal Bank of Scotland plc. on the unpaid balance (such interest to accure on a day-to-day basis from the due date stated in the invoice (as well after as before any judgment)).
**(e)** Payment shall be due whether or not property in the goods has passed by the virtue of Clause 5 above and the Company shall (without prjudice to any other right or remedy) accordingly be entitled to sue for the price once the same is due even if property in the goods has not passed.
**(f)** If in the opinion of the Company the credit worthiness of the buyer shall have deteriorated prior to delivery the Company may require full or part payment of the price prior to delivery or the provision of security for payment by the buyer in a form acceptable to the Company.

## 8. LIABILITY

**(a)** The buyer shall inspect the goods upon delivery. The Company will make good at its option by repair or replacement any defects in the goods due solely to defective workmanship or materials which are notified in writing to the Company and in the case of defect discoverable upon reasonable examination such notification must be made within (eight) weeks from the date of delivery and in the case of any defect not discoverable upon reasonable examination such notification must be made within (fourteen) days of the date such defect is actually discovered provided that:

**(i)** the aforesaid obligations of the Company shall not extend to defects caused by wilful damage, negligence (other than by employees or agents of the Company) incorrect storage or application movement installation or defects caused by fair wear and tear; and

**(ii)** the aforesaid obligations of the Company shall not extend to the misuse whether by incorrect matching with size or type of fastener excessive torque loading or otherwise accident, improper selection, unsuitable storage or deterioration due to exposure or other matters beyond the control of the Company; and

**(iii)** if required by the Company and at the buyer's cost the goods are returned within fourteen days of notification of the defect packaged and transported in accordance with the Company's requirements; and

**(iv)** the aforesaid obligations on the Company shall in any event only apply for a period of twelve months from the date of delivery.

**(b)** No goods are to be returned to the Company without prior written permission signed by a Director or an authorised executive of the Company covering the specific items and quantity. An amount equal to 10% of the net invoice value may be retained by the Company in respect of handling charge.
**(c)** Save as herein set out and for liability for death or personal injury resulting from negligence on the part of the Company and save for breach of the seller's statutorily implied undertakings as to title all express or implied conditions representations or warranties as to description, quality or fitness of the goods or otherwise are expressly excluded.
**(d)** Save for liability for death or personal injury resulting from negligence of the Company the Company shall not be liable under any one claim or under the total of all claims arising from any one act or default of the Company howsoever such claim or claims arise (be it by negligence, breach of contract, misrepresentation or otherwise) shall in no circumstances exceed the figure of £(500,000) or such greater figure as is from time to time the limit of liability laid down by the Company's insurers in respect of such claims PROVIDED THAT the Company shall not be liable for any loss or damage to any property other than to the goods (in accordance with the warranty contained in this clause) or for any consequential or indirect loss or loss profits or of contract whatsoever (whether arising by the Company's negligence or otherwise).

## 9. FORCE MAJEURE

**(a)** The Company shall not be liable to the buyer for any loss or damage which may be suffered by the buyer as a direct result of the supply of goods by the Company being prevented, hindered, delayed or rendered uneconomic by reason of circumstances or events beyond the Company's control including but not limited to Act of God, war, riot, civil commotion, Government controls, restrictions or prohibitions or any other Government act or omission whether local or national fire, flood, storm, subsidence, sabotage, accident, strike, lock-out, trade dispute or labour disturbance, breakdown of plant or machinery and shall not be liable for any loss or damage resulting therefrom suffered by the buyer.
**(b)** If due to any circumstance falling within the scope of sub-clause 9(a) above the Company has insufficient stocks to meet all its commitments then the Company may apporton available stocks between its customers at its sole discretion.

## 10. SAFETY INSTRUCTIONS

The buyer undertakes with the Company that it will ensure compliance so far as is reasonably practicable by its employees, agents, licensees and customers with any instructions given by the Company or the manufacturer for the purpose of ensuring that the goods will be safe and without risk to health when properly used and will take any other steps or precautions as having regard to the nature of the goods as are necessary to preserve the health and safety of persons handling using or disposing of them.

## 11. LEGAL INTERPRETATION

Any agreement to which these terms and conditions apply shall be governed and construed in accordance with English Law and any dispute arising out of or in connection with such agreement shall be determined by the English Courts.

## 12. SEVERANCE AND WAIVER

**(a)** In the event of any part of these conditions being ineffective for any reason, the remainder thereof shall constitute the conditions binding upon the parties.
**(b)** Failure or neglect by the Company to enforce at any time any of the provisions hereof shall not be construed as nor be deemed to be a waiver of the Company's rights hereunder nor shall such failure or neglect in any way affect the validity of the whole or any part of these terms and conditions and the Company's right to take subsequent action shall not be prejudiced thereby.

Would like to thank the following people for their assistance in the production of this catalogue:

CASTROL HONDA BRITISH SUPERSPORT TEAM

HAMMOND HEAT TREATMENT LTD.

MARK LOVELAND RACING

MERRIDALE PLATING

NU-HOMES LTD.

RING OF BELLS GARAGE

STREETBIKE LTD.


In the interest of expanding and improving product lines KING DICK reserve the right to change or modify any product or specification without prior notice.
All sizes, weights and measures are approximate.
The tips and safety suggestions contained within this catalogue are there only as a guidance and are in no way there to serve as a substitute for current industrial or national regulations.

No part of this publication may be reproduced without express permission of KING DICK TOOLS.

Designed & Produced by

essential design ©

KING DICK TOOLS

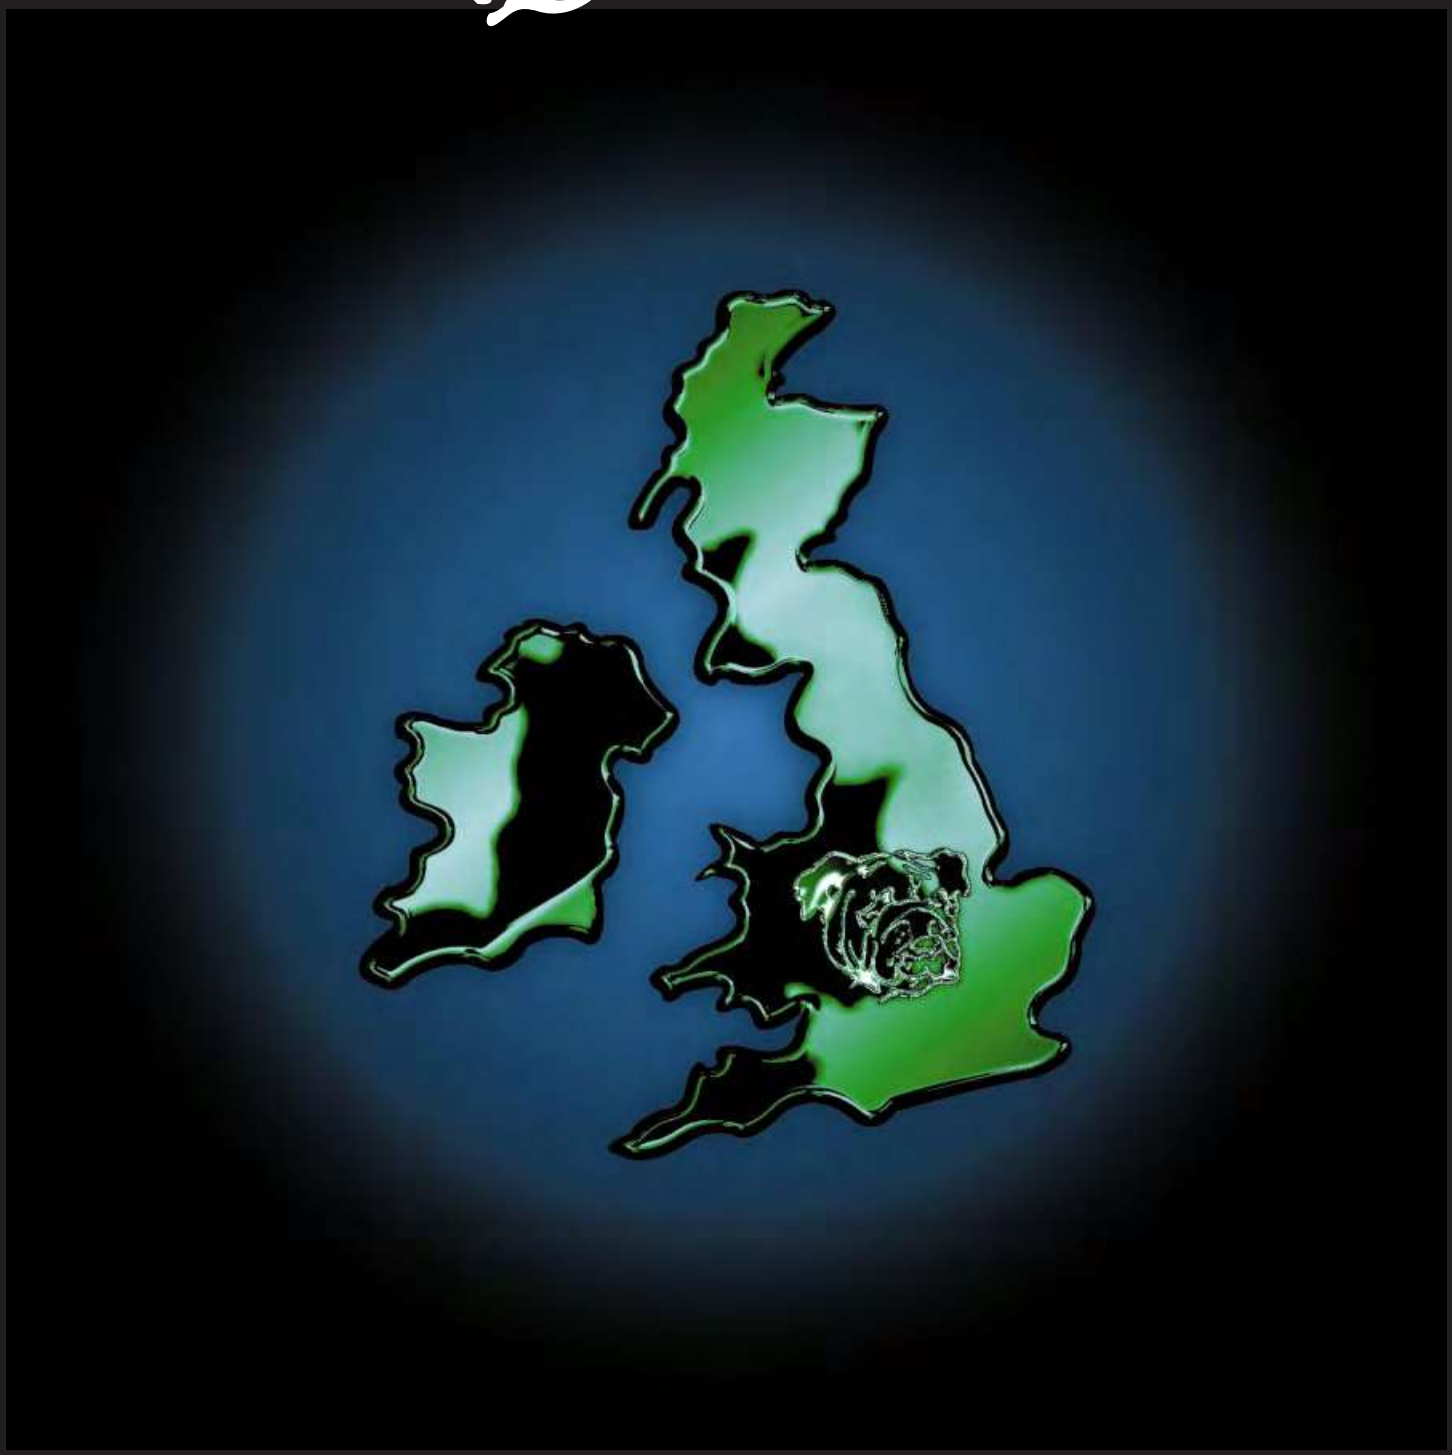

ABINGDON KING DICK unit 11, Roman Way, ENGLAND email: info@kingdicktool.com, www.kingdicktool.com